



POTTER SSX-82 Series 127dB Durable Siren or Siren Strobe Owner's Manual

[Home](#) » [POTTER](#) » POTTER SSX-82 Series 127dB Durable Siren or Siren Strobe Owner's Manual 

POTTER SSX-82 Series 127dB Durable Siren or Siren Strobe Owner's Manual



- Self-Contained /Indoor/Outdoor Siren and Siren/Strobe
- Sturdy aluminum back plate
- Strong polycarbonate housing
- Dual tamper protection
- Dual tone (steady and warble)
- 120dB @ 1 meter sound output (steady and warble)
- Mounts directly to wall or 4" square back box
- Strobe consists of colored mirror and lens
- Available strobe colors: Amber, blue, clear, red

The SSX-82 is a durable indoor/outdoor self-contained siren that is a more powerful version of the SSX-52. The full featured siren consists of a single tone that delivers a steady and warble sound output, 120dB @ 1 meter

output siren driver, and a dual action reed plunger for cover and rear protection. The SSX-82 is provided with a strong polycarbonate housing and a sturdy aluminum back plate to prevent warping and cracking. The SSX-82 comes completely assembled and ready for installation.

The SSX-82S Siren-Strobe is also available. It includes all the great SSX-82 features with the addition of a colored strobe. The strobe uses a colored mirror and lens to ensure that the color can be easily distinguished, and is available in amber, blue, clear, or red.

The SSX-82/82S excels in noisy areas such as warehouses, loading docks, print shops, busy production floors, or for indoor/outdoor applications where high quality and high output warning is required.

Contents


[1 Dimensions inches \(mm\)](#)

[2 Documents / Resources](#)

[2.1 References](#)

[3 Related Posts](#)

Dimensions inches (mm)

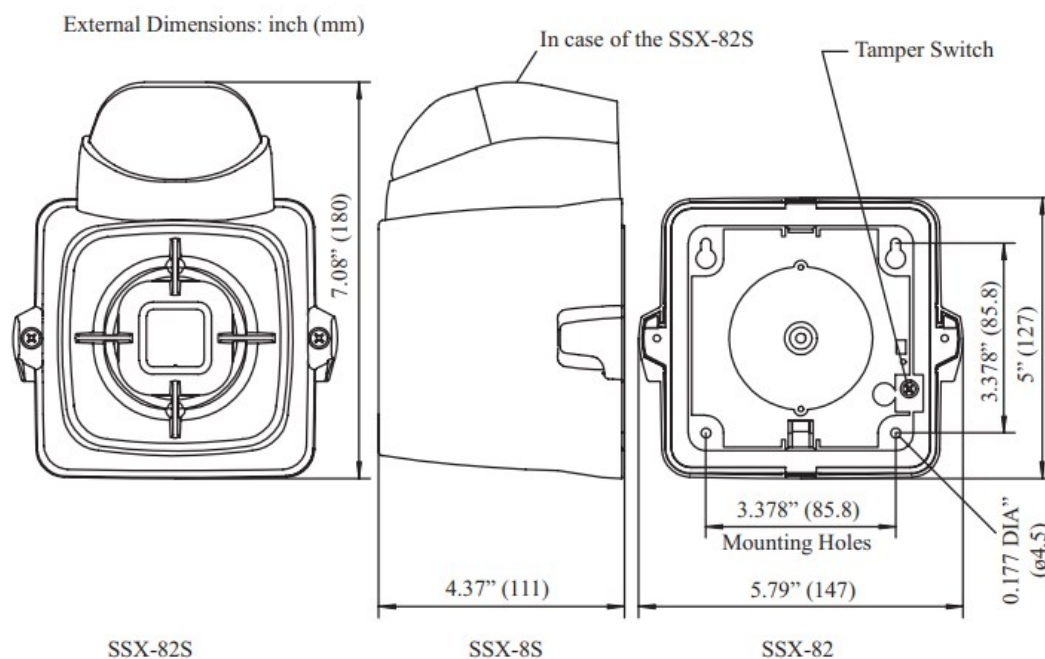


| Model Number | Stock Number | Rated Voltage | Current Draw | Operating Voltage Range | Strobe Specifications | | | Speaker Specifications | | Operating Temperature Range |
|--------------|--------------|---------------|-----------------------|-------------------------|-----------------------|-------------------------------|-------------------|------------------------|-------------------------|-----------------------------|
| | | | | | Lens Color | Strobe Candela Rating on Axis | Flash Rate | Sound Output | Tamper Contact Capacity | |
| SSX-82 | 4150032 | 12 V DC | 1.20 A Max. (typical) | 4.8 – 14.4 VDC | – | – | – | 120d BA | 0.3A @ 12V DC | -4°F to 149°F-20°C to 65°C |
| SSX-82 SA | 4150033 | 12 V DC | 1.31 A Max. (typical) | 9.6 – 14.4 VDC | Amber | 2.03 Min. | 20 -100times/min. | | | |
| SSX-82 SB | 4150034 | | | | Blue | 1.80 Min. | | | | |
| SSX-82 SC | 4150035 | | | | Clear | 3.08 Min. | | | | |
| SSX-82 SR | 4150036 | | | | Red | .75 Min. | | | | |



firealarmresources.com

Documents / Resources

| | |
|---|--|
|  | <p>POTTER SSX-82 Series 127dB Durable Siren or Siren Strobe [pdf] Owner's Manual SSX-82 Series 127dB Durable Siren or Siren Strobe, SSX-82 Series, 127dB Durable Siren or Siren Strobe, Durable Siren or Siren Strobe, Siren or Siren Strobe, Siren Strobe, Strobe</p> |
|---|--|

References

- 🔥 [Fire Alarm Resources | Download fire alarm documents](#)
- Ⓟ [Potter Electric: Fire Alarms & Fire Sprinkler Systems](#)

