



PD528 Series UHF Wireless Microphone Set



Power Dynamics PD528 Series UHF Wireless Microphone Set Instruction Manual

[Home](#) » [Power Dynamics](#) » Power Dynamics PD528 Series UHF Wireless Microphone Set Instruction Manual 

Contents

- [1 Power Dynamics PD528 Series UHF Wireless Microphone Set](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 UNPACKING INSTRUCTION](#)
- [5 POWERSUPPLY](#)
- [6 OVERVIEW](#)
- [7 RECEIVER DISPLAY](#)
- [8 HANDHELD TRANSMITTER](#)
- [9 BODYPACK TRANSMITTER](#)
- [10 TECHNICAL SPECIFICATION](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)



Power Dynamics PD528 Series UHF Wireless Microphone Set



Product Information

Specifications:

- **Product Name:** PD528 Series UHF Wireless Microphone Set
- **Reference Number:** 179.020; 179.022
- **Version:** V1.0
- **Certification:** CE Certified

Product Usage Instructions

Important Safety Instructions:

1. Read the manual thoroughly before using the unit.
2. Do not open the housing as it contains voltage-carrying parts.
3. Avoid placing metal objects or liquids inside the unit to prevent electrical shock.
4. Avoid placing the unit near heat sources, on vibrating surfaces, or covering ventilation holes.
5. Do not force controls and keep the unit out of reach of children.
6. Avoid using cleaning sprays on switches and seek advice from a specialist in case of malfunction.

Usage Instructions

1. Before using the unit, consult a specialist for advice.
2. During initial use, a slight smell may occur which is normal and will dissipate.
3. Avoid repeatedly switching the unit on and off to prolong its lifespan.
4. Handle the mains lead carefully to prevent damage.

Unpacking Instructions:

When unpacking the product, ensure all components are present and undamaged. Refer to the manual for setup

instructions.

Power Supply:

Check the label on the product for the correct mains voltage requirement. Connect the unit directly to the mains voltage specified on the label. Do not use dimmers or adjustable power supplies.

FAQ:

- **Q: Can I repair the unit myself if an issue arises?**

A: No, it is recommended to seek assistance from a qualified technician to avoid electrical shock and voiding the warranty.

- **Q: What should I do if I encounter a malfunction?**

A: Contact a specialist for advice and refrain from attempting repairs on your own to prevent further damage.

Congratulations to the purchase of this Power Dynamics product. Please read this manual thoroughly prior to using the unit in order to benefit fully from all features.

Read the manual prior to using the unit. Follow the instructions in order not to invalidate the warranty. Take all precautions to avoid fire and/or electrical shock. Repairs must only be carried out by a qualified technician in order to avoid electrical shock. Keep the manual for future reference.

- Prior to using the unit, please ask advice from a specialist. When the unit is switched on for the first time, some smell may occur. This is normal and will disappear after a while.
- The unit contains voltage-carrying parts. Therefore do NOT open the housing.
- Do not place metal objects or pour liquids into the unit. This may cause electrical shock and malfunction.
- Do not place the unit near heat sources such as radiators, etc. Do not place the unit on a vibrating surface. Do not cover the ventilation holes.
- The unit is not suitable for continuous use.
- Be careful with the mains lead and do not damage it. A faulty or damaged mains lead can cause electrical shock and malfunction.
- When unplugging the unit from a mains outlet, always pull the plug, never the lead.
- Do not plug or unplug the unit with wet hands.
- If the plug and/or the mains lead are damaged, they need to be replaced by a qualified technician.
- If the unit is damaged to such an extent that internal parts are visible, do NOT plug the unit into a mains outlet and DO NOT switch the unit on. Contact your dealer.
- To avoid fire and shock hazard, do not expose the unit to rain and moisture.
- All repairs should be carried out by a qualified technician only.
- Connect the unit to an earthed mains outlet (220-240Vac/50Hz) protected by a 10-16A fuse.
- During a thunderstorm or if the unit will not be used for a longer period of time, unplug it from the mains. The rule is: Unplug it from the mains when not in use.
- If the unit has not been used for a longer period of time, condensation may occur. Let the unit reach room temperature before you switch it on.
- Never use the unit in humid rooms or outdoors.
- To prevent accidents in companies, you must follow the applicable guidelines and follow the instructions.
- Do not repeatedly switch the fixture on and off. This shortens the lifetime.
- Keep the unit out of the reach of children. Do not leave the unit unattended.
- Do not use cleaning sprays to clean switches. The residues of these sprays cause deposits of dust and grease.

In case of malfunction, always seek advice from a specialist.

- Do not force the controls.
- This unit is with a speaker inside which can cause a magnetic field. Keep this unit at least 60cm away from computer or TV.
- If this product has a built-in lead-acid rechargeable battery: please recharge every 3 months if you are not going to use the product for a long period of time. Otherwise, the battery may be permanently damaged.
- If the battery is damaged please replace with the same specifications battery. And dispose the damaged battery environment friendly.
- If the unit has fallen, always have it checked by a qualified technician before you switch the unit on again.
- Do not use chemicals to clean the unit. They damage the varnish. Only clean the unit with a dry cloth.
- Keep away from electronic equipment that may cause interference.
- Only use original spares for repairs, otherwise, serious damage and/or dangerous radiation may occur.
- Switch the unit off prior to unplugging it from the mains and/or other equipment. Unplug all leads and cables prior to moving the unit.
- Make sure that the mains lead cannot be damaged when people walk on it. Check the mains lead before every use for damages and faults!
- The mains voltage is 220-240Vac/50Hz. Check if power outlet matches. If you travel, make sure that the mains voltage of the country is suitable for this unit.
- Keep the original packing material so that you can transport the unit in safe conditions.



This mark attracts the attention of the user to high voltages that are present inside the housing and that are of sufficient magnitude to cause a shock hazard.



This mark attracts the attention of the user to important instructions that are contained in the manual and that he should read and adhere to.

The unit has been certified CE. It is prohibited to make any changes to the unit. They would invalidate the CE certificate and their guarantee!

NOTE: To make sure that the unit will function normally, it must be used in rooms with a temperature between 5°C/41°F and 35°C/95°F.



Electric products must not be put into household waste. Please bring them to a recycling center. Ask your local authorities or your dealer about the way to proceed. The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

Do not attempt to make any repairs yourself. This would invalidate your warranty. Do not make any changes to the unit. This would also invalid your warranty. The warranty is not applicable in case of accidents or damages caused by inappropriate use or disrespect of the warnings contained in this manual. Power Dynamics cannot be held responsible for personal injuries caused by disrespect of the safety recommendations and warnings. This is also applicable to all damages in whatever form.

UNPACKING INSTRUCTION

CAUTION! Carefully unpack the box upon receipt. Check the contents to ensure that all parts are present and have been received in good condition. Notify the shipper immediately and retain packaging material if any parts appear damaged from shipping or the package itself shows signs of mishandling. Save the package and all packaging materials. If the product must be returned, the product must be returned in the original factory box and

packaging. If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.

POWERSUPPLY

The label on the back/underside of the product indicates the mains voltage to which it must be connected. Check that the mains voltage corresponds to this. Any other voltage than the one indicated may cause irreparable damage to the unit. The unit must also be connected directly to the mains voltage and no dimmer or adjustable power supply may be used.

Always connect the device to a protected circuit (circuit breaker or fuse). Make sure the device has an appropriate electrical ground to avoid the risk of electrocution or fire.

OVERVIEW

FRONT



1. Power On/Off

Switch to turn the device on/off.

2. LCD display

Shows the frequency, channel, volume and signal.

3. Lock button

Locks the group (1-4 or 5-8).

4. Group button

With this button you can set the frequency by group.

5. IR sensor

Infrared transmitter for synchronizing frequencies between receiver and handheld transmitters.

6. IR button

Button to select the channel to be synchronized with a handheld transmitter.


7. Set

Press to switch between frequency- and volume setting modes. Rotate the rotary dial to select the desired values.

8. Rotary dial

Rotate to change the volume- and frequency values.

REAR

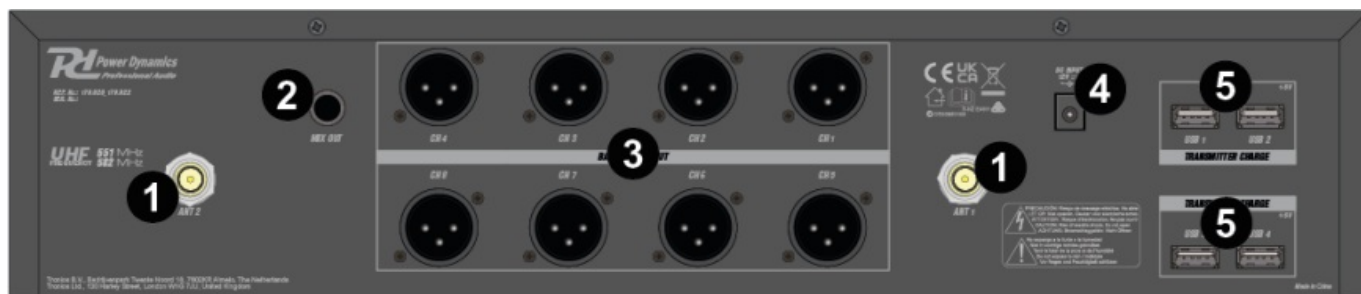

1. Antenna connectors

2. Mix out

Unbalanced microphone output connector (6.3mm jack) for channels 1-8.

3. XLR connector

XLR balanced microphone outputs for connecting to (for example) mixers, power amplifiers or other audio devices.

4. Power input for 12V adapter

Connector for inserting the supplied power adapter.


5. Transmitter charge

USB connectors for recharging the handheld transmitters.

RECEIVER OPERATION

- Switch on the receiver. The LCD will light up.
- Select the frequency by pressing the SET button. Turn the rotary dial to the desired setting and then press SET to save. By pressing SET twice you can adjust the volume level.
- Pressing the group button allows you to set the desired frequency for the group by rotating the rotary dial.
- When you press the lock button the group (1-4 or 5-8) is locked and no changes can be made in the settings.

RECEIVER DISPLAY

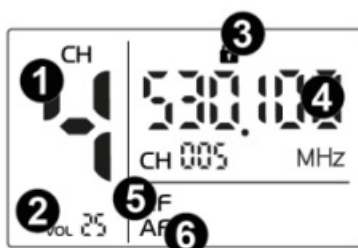

1. Channel

Shows the corresponding channel.

2. Volume

Shows the volume level of the corresponding channel.

3. Lock

Shows frequency lock status of the corresponding channel.

4. Frequency

Indicates the channels' frequency.

5. RF signal

Indicates the RF signal strength.


6. **AF signal**

Indicates the audio signal strength.

For optimum receiving:

- Position the receiver so there is nothing obstructing a line of sight to the microphones.
- Avoid placing microphones and receiver where metal or other dense materials may be present.
- Remove nearby sources of wireless interference, such as cell phones, two-way radios, computers, media players, Wi-Fi devices, and digital signal processors.
- Make sure that the microphone batteries are fully charged.
- Keep microphones more than two meters (6 feet) from each other.
- Keep the microphones and receiver more than 5 meters (16 feet) apart.

HANDHELD TRANSMITTER

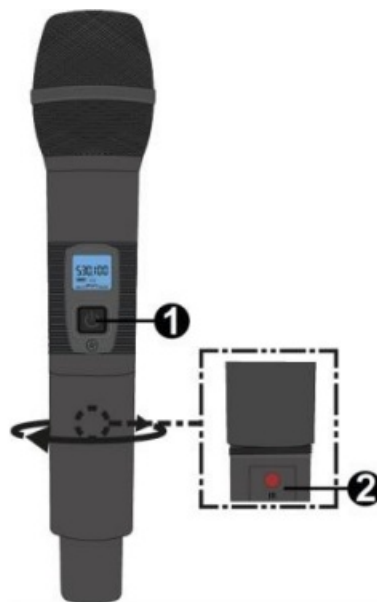

1. On/off

Press to turn the handheld microphone on/off.

2. IR sensor

Infrared sensor for synchronizing frequencies between receiver and transmitter. Rotate the battery cover to open and expose the IR sensor.

Transmitter function:

- Open the battery covers of the microphone. Press the power switch on the microphones. On the receiver: select your transmission channel. Hold the IR sensor of the corresponding microphone close to the IR transmitter of the receiver. Press the IR button of the respective channel shortly to synchronize the microphone.
- When the receiver and the microphone have been synchronized to the same channel, the RF bargraph on the receiver's display will indicate that a radio signal is being received.

Note: the more bars are displayed, the better the reception is.

- Reinstall the battery cover onto the microphone again.

BODYPACK TRANSMITTER



1. LCD display

Shows the frequency, channel, battery status and signal.

2. IR sensor

Infrared sensor for synchronizing frequencies between receiver and transmitter.

3. Microphone input

3.5mm microphone input jack for connecting a lavalier microphone.

4. Antenna

5. LED charge indicator

Shows charging status. Red = charging, blue = full charge.

6. Charge port

5V USB type-C charging port.

7. On/off


Press to turn the bodypack microphone on/off.

Transmitter function:

- Press the power switch on the microphones. On the receiver: select your transmission channel.
Hold the IR sensor of the corresponding microphone close to the IR transmitter of the receiver. Press the IR button of the respective channel shortly to synchronize the microphone.
- When the receiver and the microphone have been synchronized to the same channel, the RF bargraph on the receiver's display will indicate that a radio signal is being received.
Note: the more bars are displayed, the better the reception is.

UHF

No license required (excluding geographical restrictions)

				
BE	DK	F	FI	DE
HU	IT	NL	NO	PL
PT	RO	SI	ES	SE
CH	GB			

Belgium (BE), Denmark (DK), France (F), Finland (FI), Germany (DE), Hungary (HU), Italy (IT), Netherlands (NL), Norway (NO), Poland (PL), Portugal (PT), Romania (RO), Slovenia (SI), Spain (ES), Sweden (SE), Switzerland (CH), Great Britain (GB).

TECHNICAL SPECIFICATION

RECEIVER

- Input connections: 6.3mm Jack
- Output connections: 6.3mm Jack, USB, XLR (3-pin)
- Frequency: 551 – 582 MHz
- Frequency response: 50Hz – 18.000Hz
- Sensitivity: -108dBm @ 12dB
- THD : <0,5%
- Power supply: 100-240VAC 50/60Hz (12V Adapter)
- Power consumption: 0.163 – 0.088A
- Dimensions (L x W x H): 253 x 480 x 90mm
- Weight: 8,10kg

BODYPACK

- Microphone channels: 100 channels
- Frequency: 551 – 582 MHz
- Microphone type: Condenser
- Batteries: 3.7V (18650 Li-ion cell)

HANDHELD

- Microphone channels: 100 channels
- Frequency: 551 – 582 MHz
- Microphone type: Condenser
- Batteries: 3.7V (18650 Li-ion cell)

The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

The products referred to in this manual conform to the European Community Directives to which they are subject:

European Union

Tronios B.V., Bedrijvenpark Twente Noord 18, 7602KR Almelo, The Netherlands

2014/35/EU

2014/30/EU

2011/65/EC

2014/53/EU

United Kingdom

Tronios Ltd., 130 Harley Street, London W1G 7JU, United Kingdom

S.I. 2016:1101

S.I. 2016:1091

S.I. 2012:3032

S.I. 2017:1206

Specifications and design are subject to change without prior notice.

www.tronios.com

Copyright © 2024 by Tronios The Netherlands

Documents / Resources



Power Dynamics PD528 Series UHF Wireless Microphone Set [pdf] Instruction Manual
PD528 Series, PD528 Series UHF Wireless Microphone Set, UHF Wireless Microphone Set, Wi
reless Microphone Set, Microphone Set, Set

References

- [!\[\]\(c25df6c57dccd81095d14ed16c5e6013_img.jpg\) Samen zijn we open. Samen staan we sterk. - Stichting Open](#)
- [!\[\]\(427093379526118120820e4db9055b93_img.jpg\) Sound & Light distributor - Tronios.com](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.