



Power Dynamics PDVC100 100V Volume Control Instruction Manual

[Home](#) » [Power Dynamics](#) » Power Dynamics PDVC100 100V Volume Control Instruction Manual 



PDVC100 100V Vol.Control 100W 2x4"

Ref. nr.: 952.575

INSTRUCTION MANUAL



V1.0

Congratulations to the purchase of this Power Dynamics product. Please read this manual thoroughly prior to using the unit in order to benefit fully from all features.

Read the manual prior to using the unit. Follow the instructions in order not to invalidate the warranty. Take all precautions to avoid fire and/or electrical shock. Repairs must only be carried out by a qualified technician in order to avoid electrical shock.

Keep the manual for future reference.

- Prior to using the unit, please ask for advice from a specialist. When the unit is switched on for the first time, some smell may occur. This is normal and will disappear after a while.
- The unit contains voltage carrying parts. Therefore do NOT open the housing.
- Do not place metal objects or pour liquids into the unit. This may cause electrical shock and malfunction.
- Do not place the unit near heat sources such as radiators, etc. Do not place the unit on a vibrating surface. Do not cover the ventilation holes.
- The unit is not suitable for continuous use.
- Be careful with the mains lead and do not damage it. A faulty or damaged mains lead can cause electrical shock and malfunction.
- When unplugging the unit from a mains outlet, always pull the plug, never the lead.
- Do not plug or unplug the unit with wet hands.
- If the plug and/or the mains lead are damaged, they need to be replaced by a qualified technician.
- If the unit is damaged to such an extent that internal parts are visible, do NOT plug the unit into a mains outlet and DO NOT switch the unit on. Contact your dealer.
- To avoid fire and shock hazards, do not expose the unit to rain and moisture.
- All repairs should be carried out by a qualified technician only.
- Connect the unit to an earthed mains outlet (220-240Vac/50Hz) protected by a 10-16A fuse.
- During a thunderstorm or if the unit will not be used for a longer period of time, unplug it from the mains. The rule is: Unplug it from the mains when not in use.
- If the unit has not been used for a longer period of time, condensation may occur. Let the unit reach room temperature before you switch it on.
- Never use the unit in humid rooms or outdoors.
- To prevent accidents in companies, you must follow the application guidelines and follow the instructions.
- Do not repeatedly switch the fixture on and off. This shortens the lifetime.
- Keep the unit out of the reach of children. Do not leave the unit unattended.
- Do not use cleaning sprays to clean switches. The residues of these sprays cause deposits of dust and grease. In case of malfunction, always seek advice from a specialist.
- Do not force the controls.
- This unit is with a speaker inside which can cause a magnetic field. Keep this unit at least 60cm away from the computer or TV.
- If this product has a built-in lead-acid rechargeable battery. Please recharge the battery every 3 months if you are not going to use the product for a long period of time. Otherwise, the battery may be permanently damaged.
- If the battery is damaged please replace it with a battery of the same specifications. And dispose of the damaged battery environment friendly.
- If the unit has fallen, always have it checked by a qualified technician before you switch the unit on again.
- Do not use chemicals to clean the unit. They damage the varnish. Only clean the unit with a dry cloth.
- Keep away from electronic equipment that may cause interference.
- Only use original spares for repairs, otherwise serious damage and/or dangerous radiation may occur.
- Switch the unit off prior to unplugging it from the mains and/or other equipment. Unplug all leads and cables prior to moving the unit.
- Make sure that the mains lead cannot be damaged when people walk on it. Check the mains lead before every use for damages and faults!
- The mains voltage is 220-240Vac/50Hz. Check if the power outlet matches. If you travel, make sure that the mains voltage of the country is suitable for this unit.
- Keep the original packing material so that you can transport the unit in safe conditions.



This mark attracts the attention of the user to high voltages that are present inside the housing and that are of sufficient magnitude to cause a shock hazard.



This mark attracts the attention of the user to important instructions that are contained in the manual and that he should read and adhere to.

The unit has been certified CE. It is prohibited to make any changes to the unit. They would invalidate the CE certificate and their guarantee!

NOTE: To make sure that the unit will function normally, it must be used in rooms with a temperature between 5°C/41°F and 35°C/95°F.



Electric products must not be put into household waste. Please bring them to a recycling center. Ask your local authorities or your dealer about the way to proceed. The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

Do not attempt to make any repairs yourself. This would invalidate your warranty. Do not make any changes to the unit. This would also invalidate your warranty. The warranty is not applicable in case of accidents or damages caused by inappropriate use or disrespect of the warnings contained in this manual. Power Dynamics cannot be held responsible for personal injuries caused by the disrespect of the safety recommendations and warnings. This is also applicable to all damages in whatever form.

Contents

- [1 UNPACKING INSTRUCTION](#)
- [2 MOUNTING THE VOLUME CONTROL](#)
- [3 CONNECTIONS](#)
- [4 TECHNICAL SPECIFICATION](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)


UNPACKING INSTRUCTION

CAUTION! Immediately upon receiving the product, carefully unpack the carton, check the contents to ensure that all parts are present, and have been received in good condition. Notify the shipper immediately and retain the packing material for inspection if any parts appear damaged from shipping or the package itself shows signs of mishandling. Save the package and all packing materials. In the event that the product must be returned to the factory, it is important that the product be returned to the original factory box and packed.

If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The

arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.

MOUNTING THE VOLUME CONTROL

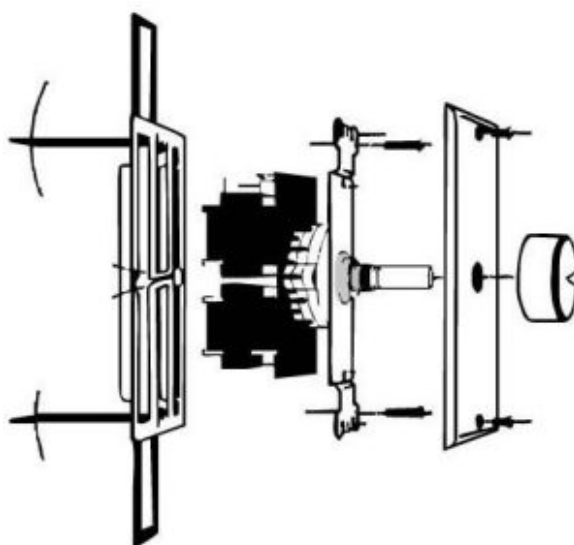

The volume control is not designed to be mounted in a standard electrical wall box. Use the wall box that comes included in the package. The provided wall box is designed to accommodate the volume control with the needed 49mm mounting depth.

Select a location that is within reach of the speaker wires and easy to reach when wanting to operate the volume control. Measure accurately before initiating the cutting/sawing/drilling process!

Warning: Do not mount the volume control directly on a wall. Use the provided wall box!

CONNECTIONS

1. Connect the speaker cable to the volume control:
 - A. Strip 6mm of insulation from the end of each cable.
 - B. Tightly twist the wires in each cable until there are no frayed ends.
 - C. Insert the 2-conductor speaker cables from the amplifier into the input terminal.
 - D. Insert the 2-conductor speaker cables from the first speaker into the output terminal.
2. Connect additional speakers in parallel.
3. Make sure that all connections between your amplifier and the volume control, and between the volume control and each speaker, are in “phase”: (+) to (+) and (-) to (-).
4. Turn the volume knob to the “off” position (counterclockwise to “0”).
5. Screw the box into place.
6. Put on faceplate and screw in place using the supplied screws.

TECHNICAL SPECIFICATION

Impedance: 100V

Frequency response: 35Hz – 20kHz

Mounting depth: 49mm

Dimensions (L x W x H): 114 x 70 x 71mm

Weight (kg): 0,35

The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

The products referred to in this manual conform to the European Community Directives to which they are subject:




- Low Voltage (LVD) 2014/35/EU
- Electromagnetic Compatibility (EMC) 2014/30/EU
- Restriction of Hazardous Substances (RoHS) 2011/65/EU

Specifications and design are subject to change without prior notice.

www.tronios.com

Copyright © 2021 by Tronios The Netherlands

Documents / Resources

 <p>Power Dynamics Professional Audio PDVC100 100V Volume Control 180W 2x4" 180W 2x4"</p> <p>INSTRUCTION MANUAL GEBRUIKSAANWIJZING INSTRUCTIONS D'UTILISATION MANUAL DE INSTRUCCIONES MANUAL INSTRUCCIONES INSTRUKCIA OBSLUGI</p>	<p>Power Dynamics PDVC100 100V Volume Control [pdf] Instruction Manual PDVC100, 100V Volume Control, PDVC100 100V Volume Control, Volume Control, 952.575</p>
--	---