



Prestel VCS-MA7 Digital Array Microphone User Guide

[Home](#) » [Prestel](#) » Prestel VCS-MA7 Digital Array Microphone User Guide 



Prestel VCS-MA7
Digital Array Microphone
Quick Start Guide

Contents

- [1 VCS-MA7 Digital Array Microphone](#)
- [2 Packing List](#)
- [3 Appearance and Interface](#)
- [4 Product Feature](#)
- [5 Product Specification](#)
- [6 Product Installation](#)
- [7 Network Application](#)
- [8 Documents / Resources](#)

VCS-MA7 Digital Array Microphone




QUICK START GUIDE

Digital Array Microphone Quick Start Guide

Packing List

Item	Quantity
Digital Array Microphone	1
USB Cable	1
3.5mm Audio Cable	1
Quick Start Guide	1
Quality Card	1

Appearance and Interface

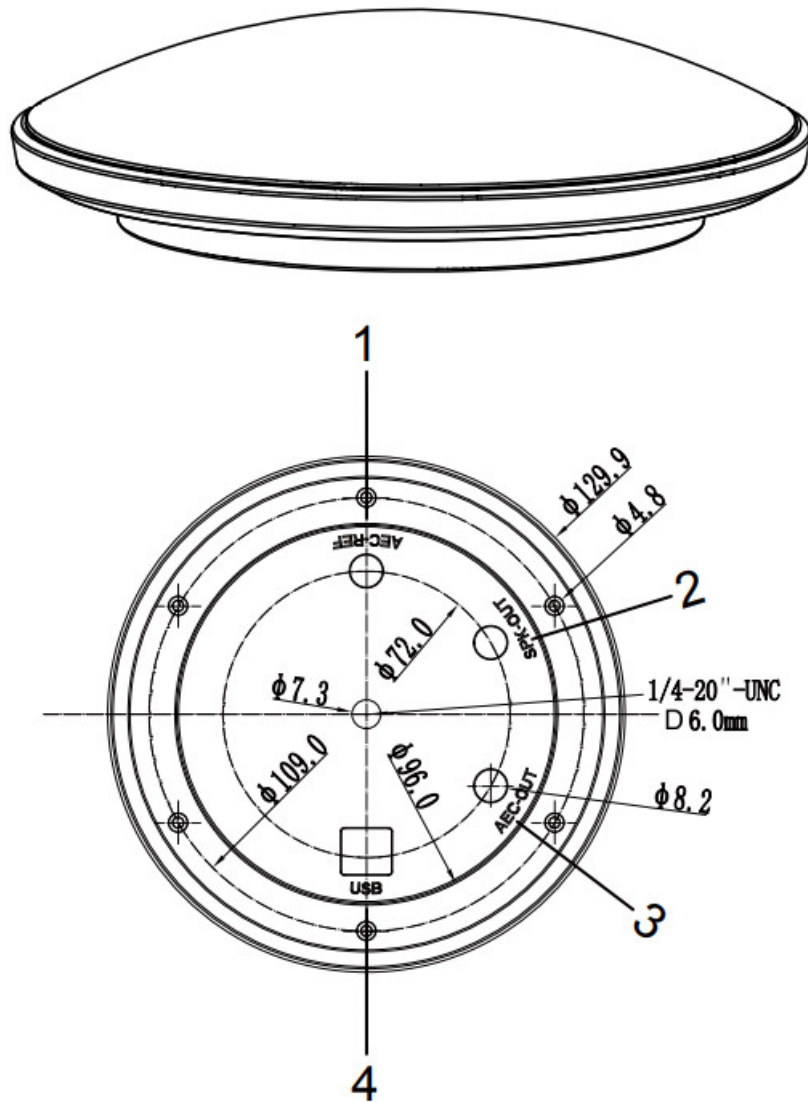

No.	Name	Function
1	AEC-REF	Signal input interface, input remote audio signal.
2	SPK-OUT	Audio signal output interface, output to the speaker.
3	AEC-OUT	Signal output interface, output to remote equipment.
4	USB	USB interface is used to connect host and charge the microphone.

Product Feature

Digital Array Microphone, Long Distance Voice Pickup

Digital array microphone, 8-meter distance voice pickup. A hands-free lecture and presentation solution.

Intelligent Voice Tracking

Adaptive blind beamforming technology provides adaptability to different sound environments. With speech reinforcement, the microphone minimizes interference and keeps speech clear.

Multiple Audio Algorithms, High Quality of Sound

Using proprietary technologies including intelligent noise reduction, echo cancellation and reverberation suppression to ensure clear sound quality and comfortable communication. Less requirements of the classroom decoration. Supports full duplex communication.

Simply Installation, Plug and Play

Using standard USB2.0 and 3.5 mm audio interface, zero configuration design, plug and play. Simple system and compact appearance, easy to install and maintain. Supports dual-mode (digital, analog) output.


Available in Two Colors, Blends into Different Environments

It adopts the technology of hot laminating and wrapping cloth. With natural visual effect, white design adapts to white walls of classrooms, and black design blends into modern conference rooms.

Product Specification


Audio Parameters	
Microphone Type	Digital Array Microphone
Array Microphone	Built-in 7 mics to form a circular array microphone
Sensitivity	-26 dBFS
Signal Noise to Ratio	> 80 dB(A)
Frequency Response	20Hz – 16kHz
Sampling Rate	32K sampling, high resolution broadband audio
Pickup Range	8m
USB Protocol	Support UAC
Automatic Echo Cancellation (AEC)	Support
Automatic Noise Suppression (ANS)	Support
Automatic Gain Control (AGC)	Support
Hardware Interface	
Audio Input	1 x 3.5mm line in
Audio Output	2 x 3.5mm line out
USB Interface	1 x USB audio interface
General Specification	
Power Input	USB 5V
Dimensions	Φ 130mm x H 33mm

Product Installation

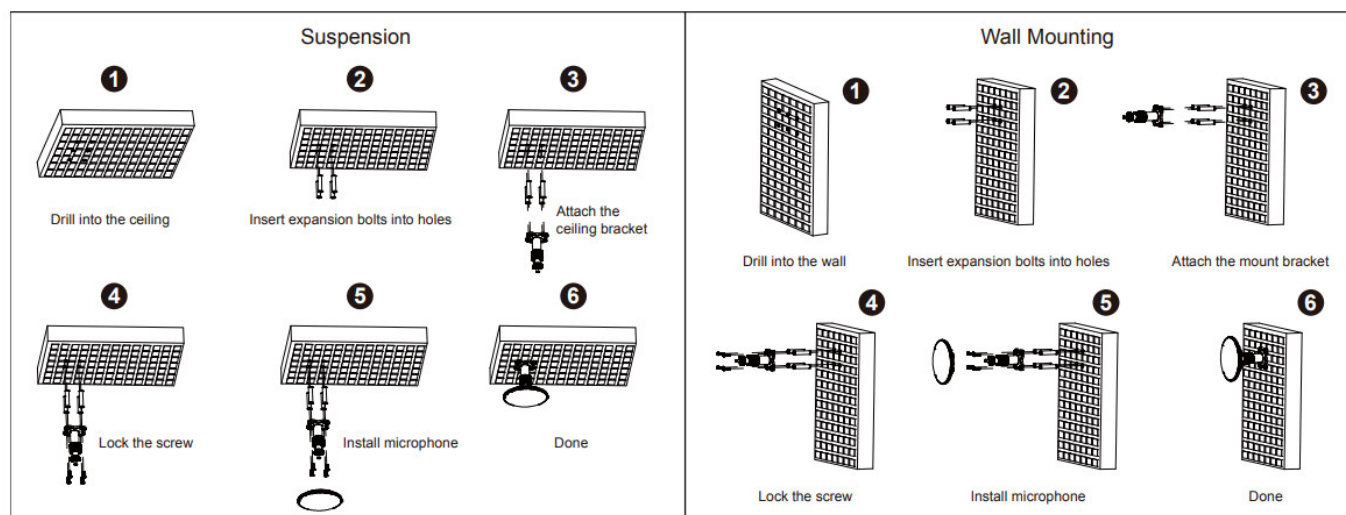


Network Application



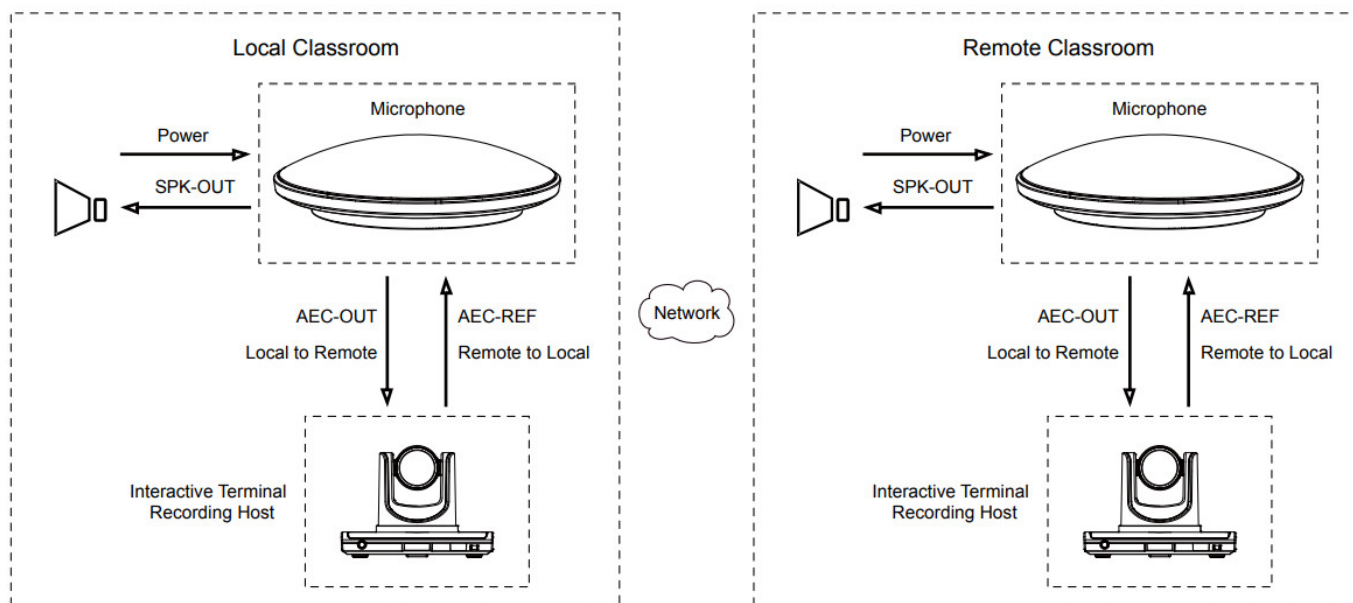


6.1 Analog Connection (3.5mm Interface)

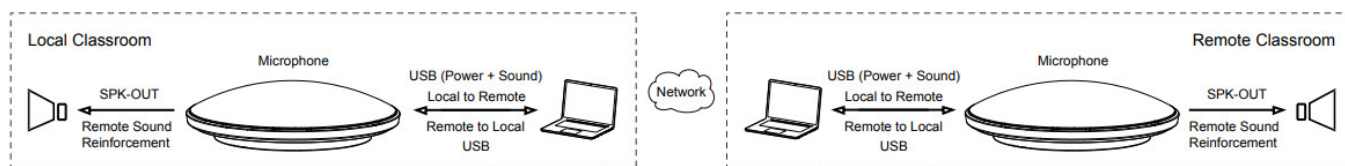

6.2 Digital Connection (USB Interface)



Documents / Resources

    	Prestel VCS-MA7 Digital Array Microphone [pdf] User Guide VCS-MA7 Digital Array Microphone, VCS-MA7, Digital Array Microphone, Array Microphone, Microphone
---	--