




PROJECT SOURCE F-2, F-2-2 Refrigerator Water Filter Instruction Manual

[Home](#) » [PROJECT SOURCE](#) » PROJECT SOURCE F-2, F-2-2 Refrigerator Water Filter Instruction Manual 

Contents

- [1 PROJECT SOURCE F-2, F-2-2 Refrigerator Water Filter](#)
- [2 INTRODUCTION](#)
- [3 TROUBLESHOOTING](#)
- [4 CARE AND MAINTENANCE](#)
- [5 INSTALLATION OVERVIEW](#)
- [6 SPECIFICATIONS](#)
- [7 WARRANTY](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

PROJECT SOURCE

PROJECT SOURCE F-2, F-2-2 Refrigerator Water Filter



INTRODUCTION

Thank you for purchasing this Project Source Refrigerator Water Filter. We've created these easy-to-follow instructions to ensure you have a simple installation process. But, if you need more information than what is provided here, please visit [Lowes.com](https://www.Lowes.com), search the item number and refer to the Guides & Documents tab on the product's page. If the item is no longer for sale, or if you have any questions or problems, please call our customer service department at 1-[866-389-8827](tel:866-389-8827), 8 a.m. – 8 p.m., EST, Monday – Sunday. You could also contact us at partsplus@lowes.com or visit www.lowespartsplus.com.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Missing O-Ring	Manufacturer Error	Call Customer Service for replacement: 866-389-8827
Leaking	Improper Installation	Remove and reinstall, ensuring the filter is securely installed within the refrigerator housing.
Slow Flow/No Flow	Improper Installation/Trapped Air Inside of the Filter	Submerge filter without safety cap in a bowl or sink full of water for 45 minutes to 1 hour, reinstall.

CARE AND MAINTENANCE

Replace filter every 6 months or 300 gallons, whichever precedes.


SAFETY INFORMATION

To reduce the risk of property damage due to water leakage, this filter **MUST** be installed in accordance with the manufacturers specifications and instructions. Installation shall comply with applicable state and local regulations. For cold water applications only. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts. This filter unit must be replaced every 6 months, at the rated capacity, or sooner if reduced water flow occurs. Failure to follow instructions and operating specifications will void your warranty. Further, the manufacturer assumes no responsibility or liability for damages arising out of misuse of the product. Protect from freezing


INSTALLATION OVERVIEW

- Turn off your refrigerator's ice maker. (Please refer to the owner's manual if needed.)


Ice Maker



- Locate your existing filter cup and remove it by turning the filter cup counterclockwise

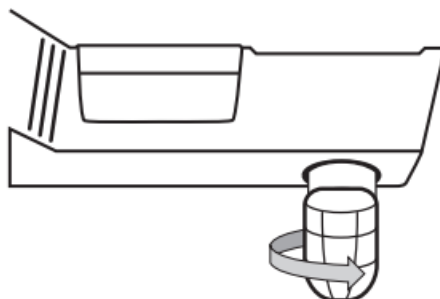


- Wash the filter cup with warm water and liquid soap, and dry completely

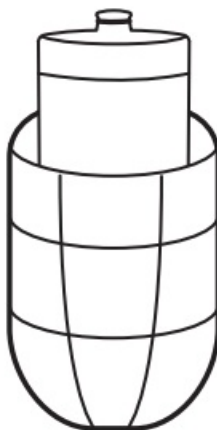


- Carefully remove the packaging from the new filter



- Place the new water filter into the cup. Ensure the O-ring end is facing up

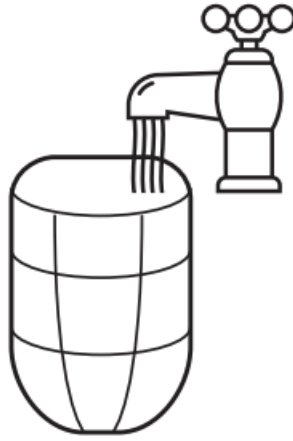


- Insert the cup and filter into the refrigerator and turn clockwise until the cup is firmly seated

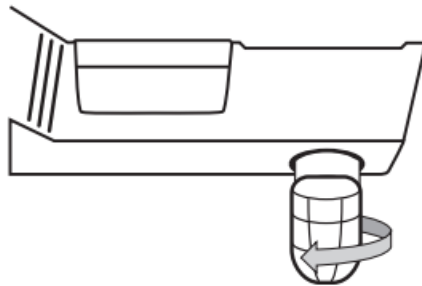


- Turn your refrigerator's ice maker on


Ice Maker



- Run approximately 2.5 gallons of water from the dispenser periodically to clear the system and to receive a good flow. If the water flow is slower than usual, please repeat Step 6.

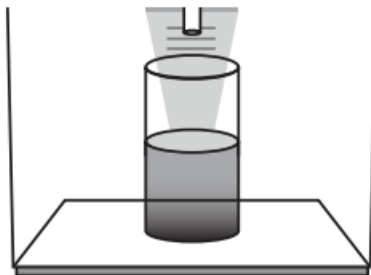


- Inspect the filter for any noticeable leaks. If leaks are detected, please repeat Step 6.

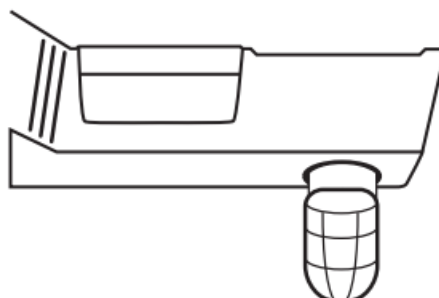

- To reset the filter monitor light, please refer to your refrigerator owner's manual for specific instructions
- Locate the included Water Filter Replacement Calendar and follow the instructions on the label

Reset



SPECIFICATIONS

- Flow Rate: .5 gpm (1.89 lpm)
- Operating Temperature: 33°-100°F (0.6°-38°C)
- Min Operating Pressure: 30 psi (207 kPa)
- Max Operating Pressure: 100 psi (689 kPa)
- Capacity: 6 months or 300
- gallons (1,136 liters)


This F-2/F-2-2 is Certified by IAPMO R&T against NSF/ANSI Standard 42, 53, 372, 401, P473 and CSA B483.1 for the reduction of Chlorine taste and odor, Lead, Cyst, VOCs, Mercury, Asbestos, Pharmaceuticals (such as Naproxen, Ibuprofen, and Phenytoin), BPA, PFOA/PFOS. Refer to Performance Data Sheet for complete list of claims.

PROJECT SOURCE and logo design are trademarks or registered trademarks of LF, LLC. All rights reserved.

WARRANTY

This replacement filter cartridge is warranted to be free from defects in material and manufacture for one (1) year from the date of purchase. This warranty does not cover any failures resulting from abuse, misuse, alteration, or damage not caused by the manufacturer or failure to follow proper installation and use instructions. If the product fails to satisfy this limited warranty during the described period, the manufacturer will replace or refund the purchase price of the product. This warranty does not cover additional costs such as labor

Documents / Resources



[PROJECT SOURCE F-2, F-2-2 Refrigerator Water Filter](#) [pdf] Instruction Manual
F-2 F-2-2 Refrigerator Water Filter, F-2, F-2-2, F-2 Refrigerator Water Filter, F-2-2 Refrigerator Water Filter, Refrigerator Water Filter, Refrigerator Filter, Water Filter, Filter

References

- [Access Denied](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.