

PROJECT SOURCE MT-20211D Complete Toilet Kit Installation Guide




Contents

- [1 ITEM # 5619672](#)
- [2 COMPLETE TOILET KIT](#)
 - [2.1 MODEL # MT-20211D](#)
 - [2.2 TROUBLESHOOTING](#)
 - [2.3 CARE AND MAINTENANCE](#)
 - [2.4 LIMITED LIFETIME WARRANTY](#)
 - [2.5 PREPARATION](#)
 - [2.6 FEELING CONFIDENT? START YOUR NEXT PROJECT](#)
 - [2.7 SAFETY INFORMATION](#)
 - [2.8 REMOVE OLD TOILET](#)
- [3 QUICK REFERENCE GUIDE](#)
 - [3.1 PACKAGE CONTENTS](#)
 - [3.2 HARDWARE CONTENTS](#)
 - [3.3 INSTALLATION OVERVIEW](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

ITEM # 5619672

COMPLETE TOILET KIT

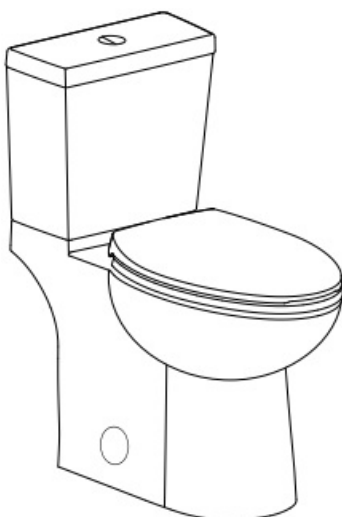

MODEL # MT-20211D

PROJECT SOURCE and PROJECT SOURCE & Design are trademarks or registered trademarks of LF, LLC. All rights reserved.

Thank you for purchasing this Project Source product. We've created these easy-to-follow instructions to ensure

you spend your time enjoying the product instead of putting it together. But, if you need more information than what is provided here, please visit [Lowes.com](https://www.lowes.com), search the item number and refer to the Guides & Documents tab on the product's page. If the item is no longer for sale, or if you have any questions or problems, please call our customer service department at [866-389-8827](tel:866-389-8827), 8 a.m – 8 p.m., EST, Monday – Sunday. You could also contact us at ascs@lowes.com.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Poor flush.	Shut-off valve is not fully open.	Open the valve.
Toilet leaking.	The button poles are too long.	Adjust the length of button poles.
Excessive noise when tank is filling.	Valve is blocked.	Remove dirt or obstruction from the valve head. Flush the lines.

CARE AND MAINTENANCE

- Do not use in-tank bowl cleaners as they can contain aggressive chemicals that attack the tank components and will void the warranty.
- After installation, flush several times and check for leaks.

LIMITED LIFETIME WARRANTY

- Manufactured with exceptional quality standards and workmanship, this Project Source product is therefore backed by a limited lifetime warranty to be free from defects in materials and workmanship. This Project Source product is warranted to the original consumer purchaser to be free from defects in materials and workmanship. Any product or part that is defective will be replaced free of charge. Merely return the product to any Lowes Home Improvement Store location for full refund or exchange. Parts found to be defective or damaged can be easily ordered by calling Customer Service at [866-389-8827](tel:866-389-8827), 8 a.m. – 8 p.m., EST. Proof of purchase (original sales receipt) from the original consumer purchaser must be made available for all warranty claims. "Fragile goods" (such as the components of handle/push button, seal ring, fill valves, flush valve and flapper etc.) are only guaranteed for five years. These parts will need to be purchased separately by calling Customer Service if beyond the five-year limited warranty. This warranty does not apply in the event of installation error, abuse, misuse or improper care and maintenance (whether by a contractor, service company or member of the purchaser's household). This warranty excludes commercial, industrial, and business use applications, incidental/inconsequential damages, failures due to misuse or abuse, and normal wear and tear. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state and province to province. Please contact Lowe's after sales services telephone No. [866-389-8827](tel:866-389-8827), 8 a.m. – 8 p.m., EST for more details.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 50 minutes

TOOLS REQUIRED (NOT INCLUDED)



FEELING CONFIDENT? START YOUR NEXT PROJECT

- Visit [Lowes.com](https://www.lowes.com) for more information.

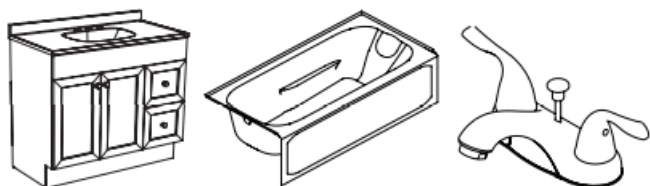

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- Do not use in-tank cleaners in your toilet. Products containing chlorine (calcium hypochlorite) can seriously damage fittings in the tank. This damage can cause leakage and property damage.

CAUTION


- Do not lift or rock the bowl after placement. If the watertight seal is broken, a new wax seal will need to be installed. Be sure the water supply valve is shut off before installation.
- Do not over-tighten bowl nuts or tank connection nut.

REMOVE OLD TOILET












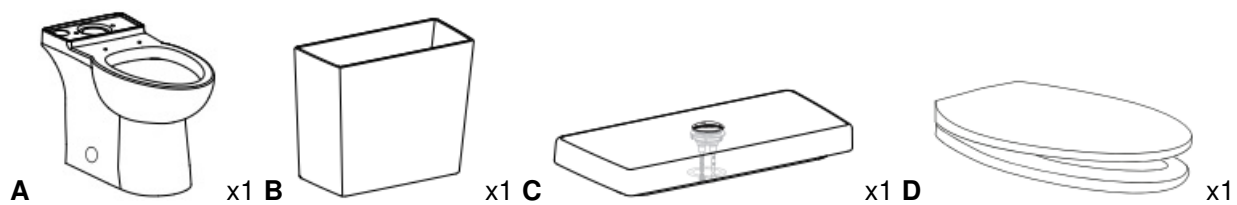




1. Turn off water supply and flush tank completely. Use a towel to dry remaining water from tank and bowl.
2. Disconnect and remove old water supply line.
3. Remove tank from bowl by removing old tank-to-bowl hardware.
4. Remove bowl from floor by removing bolt caps and floor bolt nuts..
5. Remove floor bolts from toilet flange and clean old wax, putty and sealant from base area. (Temporarily plug floor flange with a towel or cover to block sewer gases from escaping.)

QUICK REFERENCE GUIDE

PACKAGE CONTENTS




HARDWARE CONTENTS

AA	BB	CC	DD
			
x2	x2	x2	x2
EE	FF	GG	HH
			
x1	x2	x2	x2
II	JJ	KK	LL
			
x2	x2	x2	x2
MM	NN	OO	PP
			
x2	x1	x2	x2


INSTALLATION OVERVIEW

[1] Install Tank-to-bowl Seal

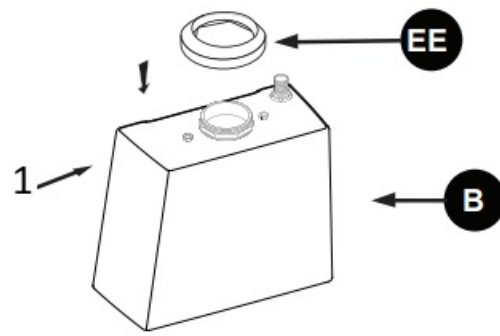


1. Lower Tank Opening

[2] Install Tank on the Bowl

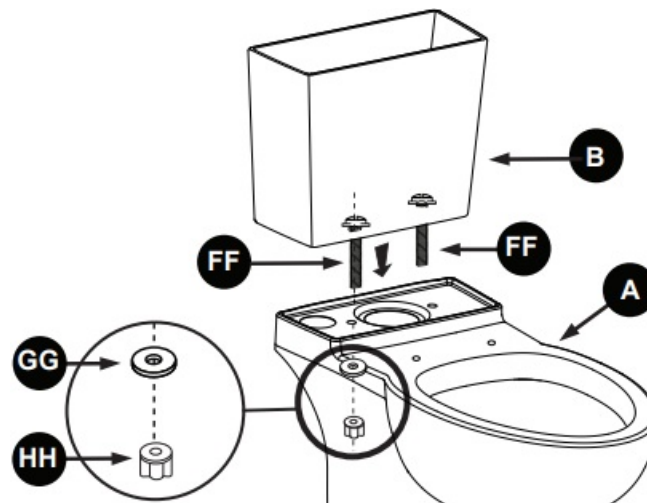


[3] Attach Water Supply Line on the toilet

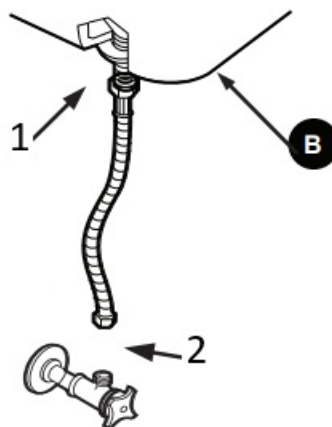


1. Connect

2. Not Connect

[4] Remove existing bolts and wax (if necessary).

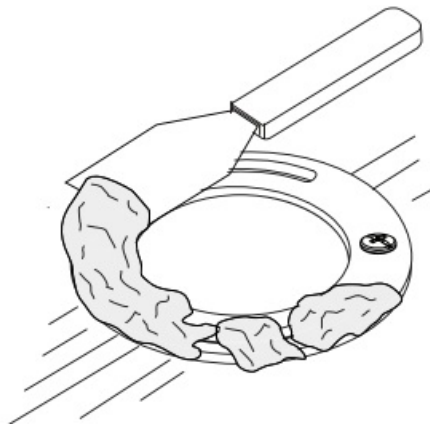


[5] Install Floor Bolts

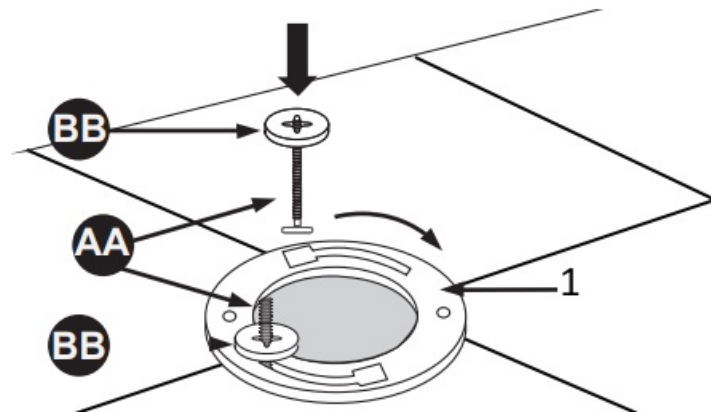


1. Floor Flange

[6] Install Wax Ring

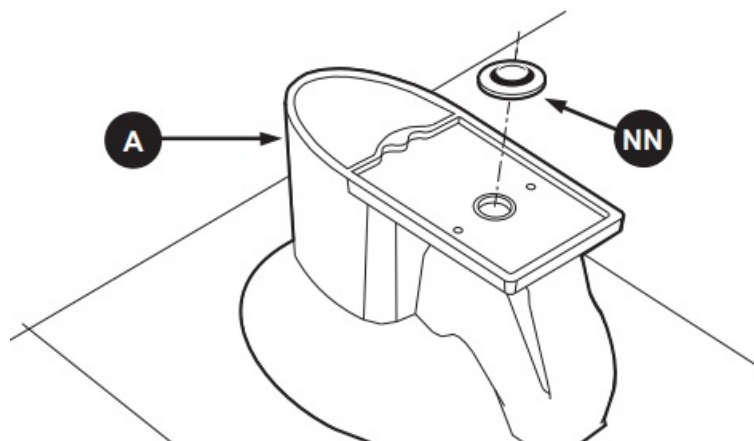

[7] Position Bowl on Floor Flange

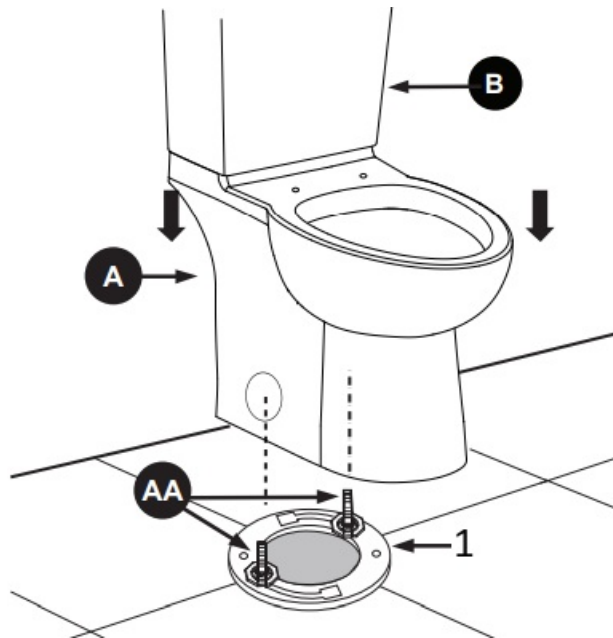


1. Floor Flange



CAUTION

Do not rock the bowl back and forth as this may break the seal.


[8] Secure Bowl to Floor

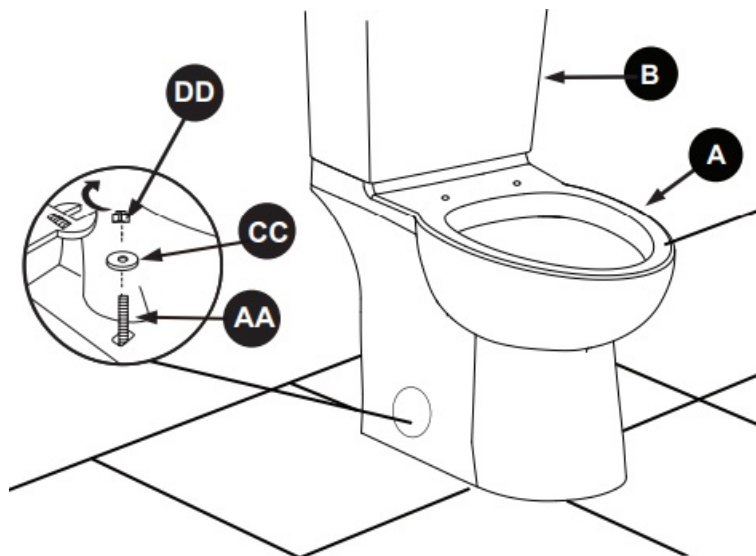


CAUTION

Pour water into bowl to prevent the escape of sewer gases.


[9] Attach the decorative cap

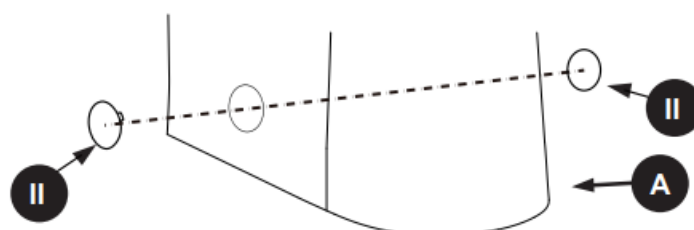

[10] Install Seat

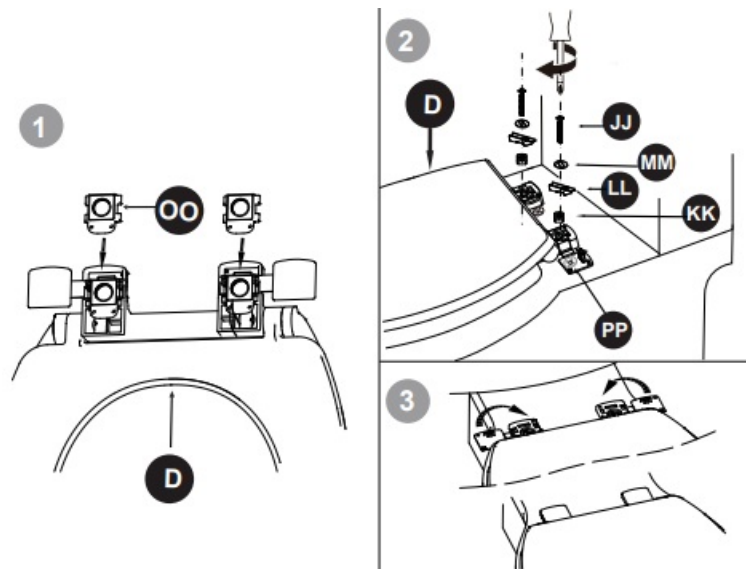


[11] Installing water tank cover

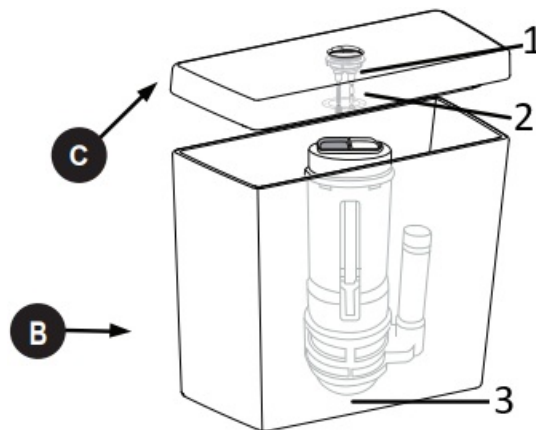


1. Rod locknut
2. Push rod
3. Flush Valve (3 inch)

[12] Attach Water Supply Line



1. Connect

Documents / Resources

	PROJECT SOURCE MT-20211D Complete Toilet Kit [pdf] Installation Guide MT-20211D Complete Toilet Kit, MT-20211D, Complete Toilet Kit, Toilet Kit, Kit
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.