



PROVISION-ISR DI-340IPSN-MVF S SIGHT IP Camera User Guide

[Home](#) » [PROVISION-ISR](#) » PROVISION-ISR DI-340IPSN-MVF S SIGHT IP Camera User Guide 



DI-340IPSN-MVF S SIGHT IP Camera
User Guide

Contents

- [1 DI-340IPSN-MVF S SIGHT IP Camera](#)
- [2 DI-340IPSN-MVF](#)
- [3 MAIN FEATURES](#)
- [4 ANALYTICS](#)
- [5 SPECIFICATIONS](#)
- [6 DIMENSIONS](#)
- [7 ACCESSORIES](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

DI-340IPSN-MVF S SIGHT IP Camera



IP S-SIGHT SERIES

Provision-ISR S-SIGHT series provides you with all you need for a simple installation. S-Sight cameras guarantee a superior imagequality, improved night performance and make an outstanding value for money solution.

DI-340IPSN-MVF

40M IR 4MP MOTORIZED VARIFOCAL LENS DOME/TURRET CAMERA

Equipped with a 2.8-12mm motorized lens, this 4MP Dome/Turret camera is designed for medium-distance surveillance (up to 40m) in indoor and outdoor scenarios. With its excellent performance, reliability, and affordable price, the DI-340IPSN-MVF camera is the perfect solution for any basic installation.



MAIN FEATURES

- 4MP

- NDAA S-SIGHT V2
- 2592×1520 Resolution
- 2.8-12mm Motorized Vari-Focal (94°-31°)
- 3D-DNR
- IP67
- Built-in microphone

ANALYTICS

- General Analytics: Camera Tampering
- Standard Analytics: Line Crossing, Sterile Area



<https://provision-isr.com>


DI-340IPSN-MVF

SPECIFICATIONS

Image Sensor	1/3" CMOS (16:9)
Effective Pixels	2560×1440
Electronic Shutter	1/2s ~ 1/100000s
Frame Rate	1-25/30FPS
Day & Night	ICR
Min. Illumination	Day: 0.1lux / Night: 0.005lux (@F1.6, AGC on) 0lux with IR on
Audio compression	G.711A/G.711U
Communication	One-way Audio
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness
Image Enhancement	True WDR (120dB), BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Mirror/Flip
Privacy Zone	Yes

Motion Detection	Yes
Analytics	General Analytics: Camera Tampering Standard Analytics: Line Crossing, Sterile
Video Compression	H.265 / H.264 / MJPEG (Substream only)
Resolution	4MP (2560×1440) / 3MP (2304×1296) / 2MP (1920×1080) / D1 /CIF
Multi-Stream	Master Stream: 4MP (2560×1440) / 3MP (2304×1296) / 2MP (1~30fps) Substream
Bit rate	64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
IR Distance	40m (3 High Power IR LED)
Lens (Field of View)	2.8-12mm MVF with Auto Focus (94°-31°)
Iris	Fixed Iris
Lens Mount	Ø14 Mount
Protection Rate	Water Proof: IP67
Bracket	3-Axis Bracket
Dimensions	Ø113mm×99.6mm
Weight (gross)	~640g
Network	RJ45 (+PoE)
Power	DC Socket
Analog Video Output	No
Audio Connectivity	Built-in Microphone
SD Card	Event/Schedule based Main/Substream recording (Up to 256GB)
Hard Reset Button	Yes
Alarm	No
Remote Monitoring	IE Browsing (Plug-In required), Chrome/Edge/Safari/Firefox plug-in free browsing
User Access	Supports simultaneous monitoring of up to 3 users with multi-stream real-time tra
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email
ONVIF	Yes
Ethernet	100Mbps
PoE	Yes
Power Supply	DC12V/~900mA / PoE/~10W
Work Environment	-30°C~60°C, 10%~90% Humidity
Junction Box	PR-JB14IP66 – PR-JB14IP64 – PR-WB-A

DIMENSIONS

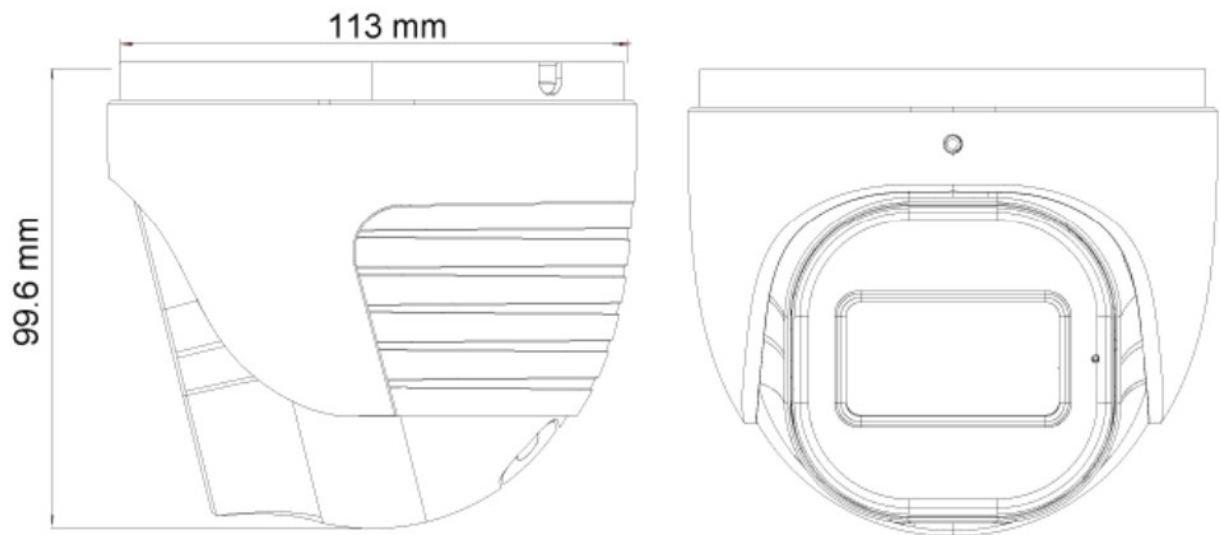

ACCESSORIES



Documents / Resources



[PROVISION-ISR DI-340IPSN-MVF S SIGHT IP Camera](#) [pdf] User Guide
 DI-340IPSN-MVF S SIGHT IP Camera, DI-340IPSN-MVF, S SIGHT IP Camera, SIGHT IP Camera, IP Camera

References

-  [Provision-ISR](#)

Manuals+.