



PROVISION ISR I2-320IPSN-28 20M IR 2MP Fixed Lens Bullet Camera Instruction Manual

[Home](#) » [PROVISION-ISR](#) » [PROVISION ISR I2-320IPSN-28 20M IR 2MP Fixed Lens Bullet Camera Instruction Manual](#) 

Contents

- [1 PROVISION ISR I2-320IPSN-28 20M IR 2MP Fixed Lens Bullet Camera](#)
- [2 MAIN FEATURES](#)
- [3 ANALYTICS](#)
- [4 SPECIFICATIONS](#)
- [5 DIMENSIONS](#)
- [6 ACCESSORIES](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

provision

PROVISION ISR I2-320IPSN-28 20M IR 2MP Fixed Lens Bullet Camera



IP S-SIGHT SERIES

Provision-ISR S-SIGHT series provides you with all that you need for a simple installation. S-Sight cameras guarantee superior image quality, and improved night performance and make an outstanding value-for-money solution.

20M IR 2MP FIXED LENS BULLET CAMERA

Equipped with a 2.8mm fixed lens, this 2MP bullet camera is designed for short-distance surveillance (up to 20m) in both indoor and outdoor scenarios. With its great performance, reliability and affordable price I2-320IPSN-28 camera is the perfect solution for basic installations.

MAIN FEATURES

- 2MP
- S-SIGHT V2
- 1920×1080 Resolution
- 3D-DNR
- IP67

ANALYTICS


- **General Analytics:** Camera Tampering
- **Standard Analytics:** Line Crossing, Sterile Area

SPECIFICATIONS

Image Sensor	1/2.8" CMOS (16:9)
Effective Pixels	1920×1080
Electronic Shutter	1/25s ~ 1/100000s
Frame Rate	1-25/30FPS
Day & Night	ICR
Min. Illumination	Day: 0.1lux / Night: 0.009lux (@F1.6, AGC On) 0lux with IR on
Audio compression	N/A
Communication	N/A
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Mirror/Flip
Privacy Zone	Yes
Motion Detection	Yes
Analytics	General Analytics: Camera Tampering Standard Analytics: Line Crossing, Sterile Area
Video Compression	H.265 / H.264 / MJPEG (Sub-Stream Only)
Resolution	2MP (1920×1080) / D1 (704×576) / QVGA (480×240) / CIF (352×288)
Multi-Stream	Master Stream: 2MP (1920×1080) / 1MP (1280×720) (1~30fps) Sub-Stream: QVGA/D1/CIF (1~30fps)
Bit rate	64Kbps ~ 4Mbps@H.265 / 64Kbps ~ 6Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
IR Distance	20m (1 High Power IR LED)
Lens (Field of View)	2.8mm (103.7°)

Iris	Fixed Iris
Lens Mount	M12 mount
Protection Rate	Water Proof: IP67
Bracket	3-Axis Bracket
Dimensions	172.2×73.4×74.5mm
Weight (gross)	~390g
Network	RJ45 (+PoE)
Power	DC Socket
Analog Video Output	No
Audio Connectivity	No
SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
Hard Reset Button	Yes
Alarm	No
Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
User Access	Supports simultaneous monitoring for up to 3 users with multi-stream real time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
ONVIF	Yes
Ethernet	100Mbps
PoE	Yes
Power Supply	DC12V/~420mA / PoE/~5.4W
Work Environment	-30°C~60°C, 10%~90% Humidity
Junction Box	PR-JB12IP66 – PR-JB12IP64

DIMENSIONS

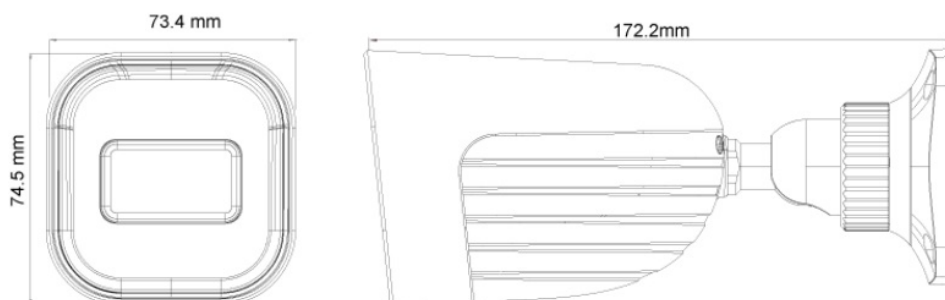

ACCESSORIES



- PR-JB12IP66
- PR-JB12IP64

Documents / Resources

	PROVISION ISR I2-320IPSN-28 20M IR 2MP Fixed Lens Bullet Camera [pdf] Instruction Manual I2-320IPSN-28, 20M IR 2MP Fixed Lens Bullet Camera, I2-320IPSN-28 20M IR 2MP Fixed Lens Bullet Camera, IR 2MP Fixed Lens Bullet Camera, 2MP Fixed Lens Bullet Camera, Fixed Lens Bullet Camera, Lens Bullet Camera, Bullet Camera, Camera
---	--