



Provision-ISR I2-340IPSN-28 20m IR 4mp Fixed Lens Bullet Camera Instructions

[Home](#) » [PROVISION-ISR](#) » Provision-ISR I2-340IPSN-28 20m IR 4mp Fixed Lens Bullet Camera Instructions 

Contents

- [1 Provision-ISR I2-340IPSN-28 20m IR 4mp Fixed Lens Bullet Camera](#)
- [2 MAIN FEATURES](#)
- [3 SPECIFICATIONS](#)
- [4 DIMENSIONS](#)
- [5 ACCESSORIES](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)



Provision-ISR I2-340IPSN-28 20m IR 4mp Fixed Lens Bullet Camera



20M IR 4MP FIXED LENS BULLET CAMERA

Equipped with a 2.8mm fixed lens, this 4MP bullet camera is designed for short-distance surveillance (up to 20m) in indoor and outdoor scenarios. With its excellent performance, reliability, and affordable price, the I2-340IPSN-28 camera is the perfect solution for any basic installation.

FEATURES



MAIN FEATURES

- 4MP
- S-SIGHT V2
- 2592×1520 Resolution Resolution
- Wide field of view 110°
- 3D-DNR

- IP67

ANALYTICS


- General Analytics: Camera Tampering
- Standard Analytics: Line Crossing, Sterile Area

SPECIFICATIONS

- **Image Sensor:** 1/2.7" CMOS (16:9)
- **Effective Pixels:** 2560×1440
- **Electronic Shutter:** 1/25s ~ 1/1000000s
- **Frame Rate:** 1-25/30FPS
- **Day & Night:** ICR
- **Min. Illumination:** Day: 0.1lux / Night: 0.04lux (@F2.2, AGC on) 0lux with IR on
- **Audio compression:** N/A
- **Communication:** N/A
- **Image Settings:** AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
- **Image Enhancement:** Digital WDR, BLC, HLC, ROI
- **Noise Reduction:** 3D-DNR
- **Image Orientation:** Mirror/Flip
- **Privacy Zone:** Yes
- **Motion Detection:** Yes
- **Analytics:** General Analytics: Camera Tampering Standard Analytics: Line Crossing, Sterile Area
- **Video Compression:** H.265 / H.264 / MJPEG (Substream Only)
- **Resolution:** 4MP (2560×1440) / 3MP (2304×1296) / 2MP (1920×1080) / D1 / QVGA /CIF
- **Multi-Stream:** Master Stream: 4MP (2560×1440) / 3MP (2304×1296) / 2MP (1~30fps) Substream: 1MP (1~12/15fps) /QVGA/D1/CIF (1~30fps) Third Stream: QVGA/D1/CIF (1~30fps)
- **Bit rate:** 64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264
- **Encode Mode:** VBR/CBR
- **Image Quality:** Five levels under VBR; Free adjustment under CBR
- **IR Distance:** 20m (1 High-Power IR LED)
- **Lens (Field of View):** 2.8mm (110°)
- **Iris:** Fixed Iris
- **Lens Mount:** M12 mount
- **Protection Rate:** Water Proof: IP67
- **Bracket:** 3-Axis Bracket
- **Dimensions:** 172.2×73.4×74.5mm
- **Weight (gross):** ~390g
- **Network:** RJ45 (+PoE)
- **Power:** DC Socket
- **Analog Video Output:** No
- **Audio Connectivity:** No

- **SD Card:** Event/Schedule based Main/Substream recording (Up to 128Gb)
- **Hard Reset Button:** Yes
- **Alarm:** No
- **Remote Monitoring:** IE Browsing, VMS Software, Provision Cam2 Mobile App
- **User Access:** Supports simultaneous monitoring of up to 4 users with multi-stream real-time transmission
- **Network Protocol:** IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
- **ONVIF:** Yes
- **Ethernet:** 100Mbps
- **PoE:** Yes
- **Power Supply:** DC12V/~420mA / PoE/~5.4W
- **Work Environment:** -30°C~60°C, 10%~90% Humidity
- **Junction Box:** PR-JB12IP66 – PR-JB12IP64

DIMENSIONS

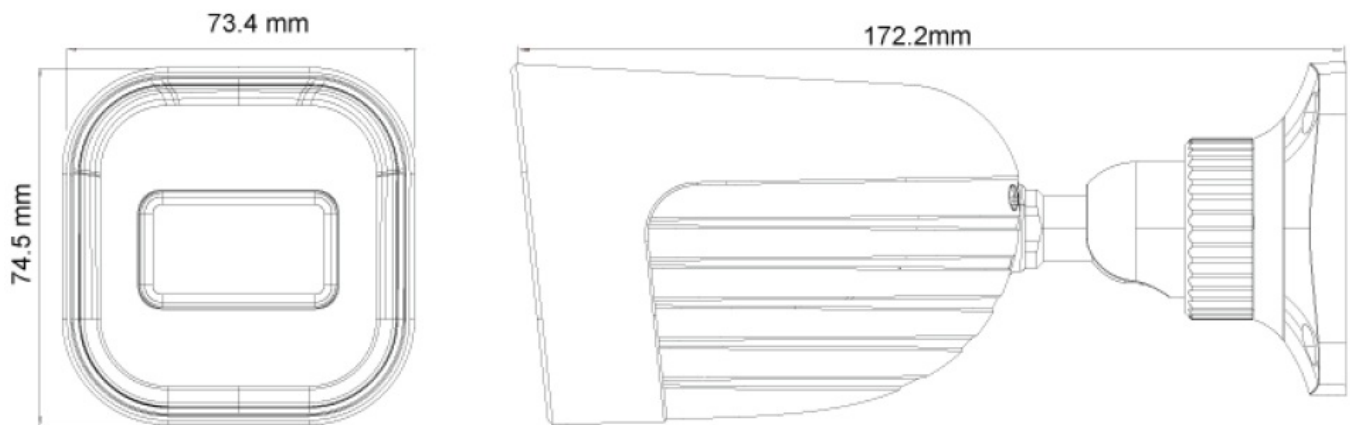

ACCESSORIES



PR-JB12IP66



PR-JB12IP64



Documents / Resources

	Provision-ISR I2-340IPSN-28 20m IR 4mp Fixed Lens Bullet Camera [pdf] Instructions I2-340IPSN-28 20m IR 4mp Fixed Lens Bullet Camera, I2-340IPSN-28, 20m IR 4mp Fixed Lens Bullet Camera, Fixed Lens Bullet Camera, Lens Bullet Camera, Bullet Camera, Camera
---	---

Manuals+