




PROVISION-ISR NVR5-8200PXN Digital IP Video Recorder Owner’s Manual

[Home](#) » [PROVISION-ISR](#) » PROVISION-ISR NVR5-8200PXN Digital IP Video Recorder Owner’s Manual 

PROVISION-ISR NVR5-8200PXN Digital IP Video Recorder Owner’s Manual



Contents

- 1 [Instruction](#)
- 2 [MAIN FEATURES](#)
- 3 [SPECIFICATIONS](#)
- 4 [DIMENSIONS](#)
- 5 [Documents / Resources](#)
 - 5.1 [References](#)
- 6 [Related Posts](#)

Instruction

Provision-ISR’s NVR5-8200PXN(MM) is a high-performance network video recorder with an integrated 8-channel PoE switch for highdefinition surveillance. This NDAA-compliant, easy-to-install solution is suitable for small-sized installations (up to 8 channels), providing you with everything you need for a trouble-free CCTV project. This model complies with NDAA demands and ensures that your devices are cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime.



HDMI

Video Outputs



VGA

Video Outputs

1080P

Resolution




1 HDD



DDA
VIDEO ANALYTICS

Analytics

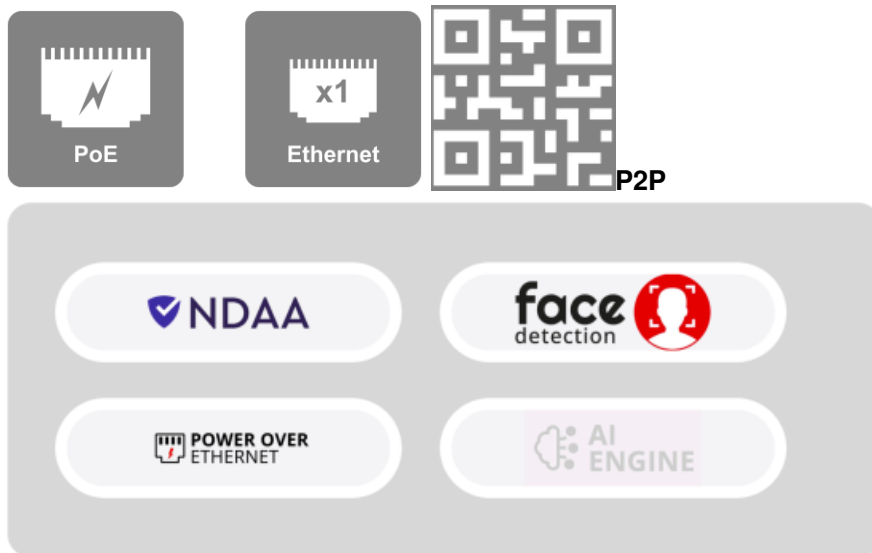

MAIN FEATURES

Video:

- **Input:** 8 Channel Support
- 8 Channel PoE / Standard Network Connection (Via 8 x RJ-45 / Network)
- **Output:** HDMI / VGA (1080P, 1280×1024, 1024×768)

Bandwidth:

- **Incoming:** 64Mbps
- **Outgoing:** 64Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Thermal (Limited Support)
- *DDA Analytics Live Snapshots are not supported

Recording:

- 8CH 5MP Real-Time
- **FPS:** 200 (PAL) / 240 (NTSC)

Playback:

- **Local:** 8Ch Simultaneously

- **Remote:** 8Ch Simultaneously

Audio:

- **Input:** IPC Inputs Only
Output: IPC Outputs Only

Alarm:

- **Input:** Based on IPC only
- **Output:** Based on IPC only

Storage:

- 1 x SATA (Up to 6TB each)

USB Port:

- 2 USB 2.0 Port

Network:

- 1 x RJ-45: 10/100Mbps Each

Remarks:

- The following features are based on firmware v1.4.8 and are subject to firmware version changes.



<https://provision-isr.com>

SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
Video	
Video Input	8Ch over Network / PoE direct connection

Output	HDMI / VGA (1080P, 1280×1024, 1024×768)
View Mode	Mirrored
Fish-Eye Dewarp	Web Only
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch – 5MP ; 4Ch – 1080P
Audio	
Audio-specs-Input	Based on IPC only
audio-specs-Output	Based on IPC only
Compression	G.711A/G.711U
Two Way Audio	No
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting(DDA), Crowd Gathering, People Intrusion, Smart Search, Thermal (Limited Support)*DDA Analytics Live Snapshots are not supported
Analytics Channels (IPC Based)	8Ch (requires supporting IPC)
Analytic Channels (NVR Based)	N/A
Face Recognition Rate	N/A
Bandwidth	
Incoming	64Mbps
Outgoing	64Mbps
Record/ Main Stream	
Real-Time Recording	8CH 5MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	N/A
8MP	N/A
5MP and lower	240FPS(NTSC)/200FPS(PAL)
Master stream over net work	Up to 8CH@Recording Resolution
Substream	
Resolution substream	Depends on IPC
Remote view	


Max Channel View	40Ch (Limited to Outgoing Bandwidth Capacity)
Remote Applications	
User Access	64 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)*P2P WEB connection always requires Plugin
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	8Ch
Remote	8Ch
Search Mode	DDA Object, Smart Search, Time-Slice, Time, Event, POS
Backup	
USB	2 USB 2.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
Alarm	
Alarm-in	Based on IPC only
Alarm-out	Based on IPC only
Storage	
HDD	1
E-Sata Support	No
RAID	N/A
PTZ	
Connection	via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	N/A
Network	
Ethernet	10/100Mbps self-adaptive Ethernet interface
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)
PoE	
PoE Ports	8xRJ45
Speed	10/100Mbps (10Mbps under CCTV Mode)

Standard	PoE (IEEE802.3AF/AT)
CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	72W (Average 9W per Channel)
Max. Power Output (Per Ch.)	~25.5W
Others	
Power Supply	DC48V/2.5A
Power consumption (No HDD)	5W
Dimension	W255xD220xH45mm
Operation Temperature	0°C~50°C

DIMENSIONS



Documents / Resources

	PROVISION-ISR NVR5-8200PXN Digital IP Video Recorder [pdf] Owner's Manual NVR5-8200PXN Digital IP Video Recorder, NVR5-8200PXN, Digital IP Video Recorder, IP Video Recorder, Video Recorder, Recorder
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.