

PROZOR VC504c Analog to Digital Audio Converter Instruction Manual

Home » PROZOR » PROZOR VC504c Analog to Digital Audio Converter Instruction Manual



Contents

- 1 PROZOR VC504c Analog to Digital Audio
- Converter
- 2 Features
- 3 Specification
- **4 Package Contents**
- 5 Product interface diagram
- 6 Physical interface diagram
- 7 FAQ
- 8 Documents / Resources
 - 8.1 References
- 9 Related Posts



PROZOR VC504c Analog to Digital Audio Converter



Special Notice

- 1. It's not a Digital Analog audio converter.
- 2. Dolby sound is not supported, please shut off Dolby when used.
- 3. Please adjust the volume on the terminal audio equipment instead of the TV.

Features

- 1. Convert analog L/R audio signal to Coaxial or Toslink digital audio signal.
- 2. Support 3.5mm audio and RCA audio input.
- 3. Support sampling rate: 32, 44.1, 48 and 96 KHz.
- 4. The R/L channel of S/PDIF is 24-bit.
- 5. Support electromagnetic noise-free transmission.
- 6. Easy to install and simple to operate.

Specification

- Input Audio: L/R analog audio
- · Output Audio: Coaxial or Toslink digital audio
- Input Audio Connector: 2xRCA(L/R), 3.5mm audio
- Output Audio Connector: Toslink, 1XRCA(Coaxial)
- Sample Rate: 32, 44.1, 48 and 96 KHz
- Max Working Current: 250mA
- Power Adapter Format: AC (50Hz, 60Hz) 100V-240V; DC 5V/500A
- Operating Temperature Range: (-15 C to +55 C)

- Working Humidity Range: 5% to 90%RH (No Condensation)
- Dimension (L x W x H): 49x48x20(mm)
- Weight: 74g

Package Contents


- 1 x Analog to Digital audio converter
- 1 x USB Power Cable
- 1 x User Manual

Product interface diagram





Physical interface diagram

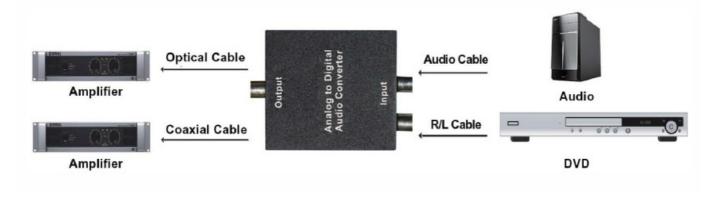

NOTE

- 1. Pis use the machine as the instruction listed to keep the long use lifetime of the machine
- 2. The machine should be placed at a spot far from a Damp, High-Temperature, Dusty, Erosive, and oxidative

environment.

- 3. All parts will be free from the strong shake, hit,fall.
- 4. Touching the power adaptor with the wet hands is prohibited.
- 5. Pis hold the power adaptor head and do not pull the power cord when cut off from the socket.
- 6. Pis turns the power off when the machine is not used for long time.
- 7. Pis do not open the cover and do not touch the inside parts.
- 8. Pis use the original factory power adaptor

FAQ

Please check all the cables carefully before installation and make sure all the interfaces are connected correctly. The common problems and the relevant solutions are showed as follows.

Trouble Description	Cause and Ways to deal with
No Audio signal output after connecting as required	Check the analog input signal whether it corresponds wi th PCM or LPCM
	2. Check whether the Toslink output has flash light on and the connecting is tight.
	3. Check if the audio receiver supports the 2.1ch Audio for mat.
	No Audio signal output after connecti

Made in China

Documents / Resources



PROZOR VC504c Analog to Digital Audio Converter [pdf] Instruction Manual A1ftsMq-0OL, VC433c, VC504c, VC504c Analog to Digital Audio Converter, VC504c, Analog to Digital Audio Converter, Digital Audio Converter, Audio Converter, Converter

References

• User Manual

Manuals+