



Puravent 423570 TSFI-T-250-S Perforated Face Ceiling Diffuser User Manual

[Home](#) » [puravent](#) » Puravent 423570 TSFI-T-250-S Perforated Face Ceiling Diffuser User Manual 

Contents

- [1 Puravent 423570 TSFI-T-250-S Perforated Face Ceiling Diffuser](#)
- [2 Description](#)
 - [2.1 Function](#)
 - [2.2 Product Description](#)
 - [2.3 Features](#)
- [3 Dimensions](#)
- [4 Ordering codes](#)
- [5 Diagram](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



Puravent 423570 TSFI-T-250-S Perforated Face Ceiling Diffuser



Description

Function

The TSFI-T is a perforated face ceiling diffuser. The diffuser is suitable to be used with the TSOI-T supply series diffuser, but for extract applications. The Side entry plenum box is non-insulated and ideal for the return air application. The diffuser is as standard powder painted to RAL9010.

Product Description

TSFI-T-ØD-S: Side-entry perforated plate return diffuser


Features

- Extract functionality
- Ideal for modular ceiling tile replacement
- Side Entry plenum non-insulated for return air

Selection Criteria

- Ceiling Height 2.7m
- Maintain air volume equivalent to 2.5m/s neck velocity for low turbulence and quiet diffuser performance

Dimensions

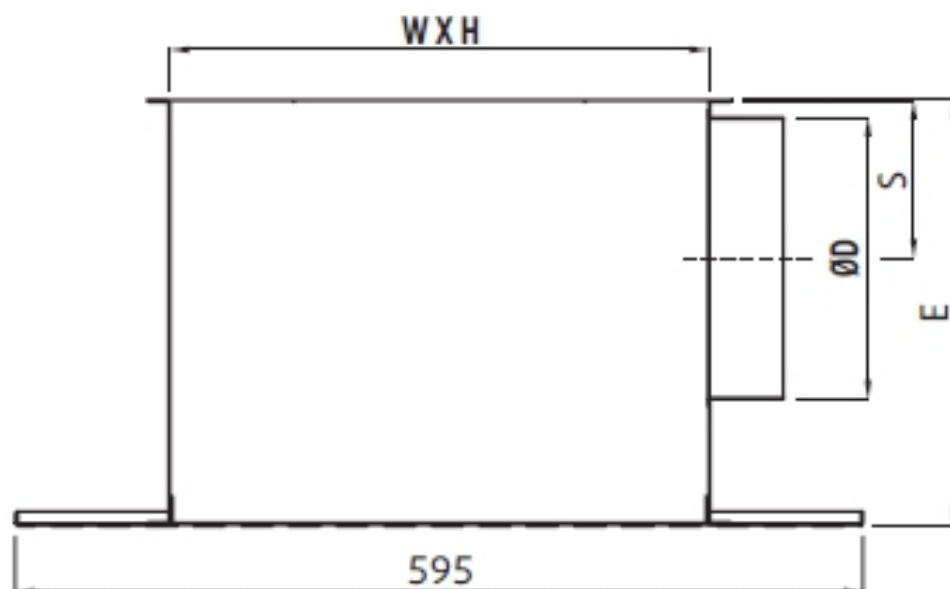

Type	WxH	ØD	S	E
125	240X240	123	72	227
160	300X300	158	90	270
200	380X380	198	110	300
250	480X480	292*	102	300
315	560X560	394*	99	295

Type 250 en 315 mm hebben ovale aansluitingen

Ordering codes

Ordering codes


	TSFI	T	Ø□	S
Product series				
Plaster ceiling installation	P			
T-Bar ceiling 595x595 installation	T			
	125			
	160			
	200			
	250*			
Inlet size	315*			
	66			
Face T-Bar Size	126			
No Plenum	0			
Top entry plenum	T			
Side entry plenum	S			

Diagram

TSFI			Exhaust					TSFI-T
m ³ /h	l/s		125	160	200	250	315	66
50	14	$\Delta P_f(Pa)$						
		L_{max}						
75	21	$\Delta P_f(Pa)$						
		L_{max}						
100	28	$\Delta P_f(Pa)$	5					
		L_{max}	-					
125	35	$\Delta P_f(Pa)$	8					
		L_{max}	-					
150	42	$\Delta P_f(Pa)$	14	5	2			
		L_{max}	-	-	-			
200	56	$\Delta P_f(Pa)$	23	9	4			
		L_{max}	30	-	-			
250	69	$\Delta P_f(Pa)$	36	13	6	2		3
		L_{max}	37	-	-	-		
300	83	$\Delta P_f(Pa)$	52	19	8	3		5
		L_{max}	40	-	-	-		-
400	111	$\Delta P_f(Pa)$		34	14	6	2	9
		L_{max}		35	-	-	-	
500	139	$\Delta P_f(Pa)$		52	21	9	4	14
		L_{max}		41	27	-	-	
600	167	$\Delta P_f(Pa)$			35	13	5	20
		L_{max}			34	-	-	36
750	208	$\Delta P_f(Pa)$			54	21	9	31
		L_{max}			41	-	-	41
1000	278	$\Delta P_f(Pa)$				36	15	56
		L_{max}				37	-	48
1250	347	$\Delta P_f(Pa)$				60	24	65
		L_{max}				47	37	55

Name: TSFI-T-250-S | Item no.: 423570 Document type: Product card | Document date: 2019-05-29 | Generated by: Online catalog.

Documents / Resources



Puravent 423570 TSFI-T-250-S Perforated Face Ceiling Diffuser [pdf] User Manual
423570, TSFI-T-250-S Perforated Face Ceiling Diffuser, 423570 TSFI-T-250-S Perforated Face Ceiling Diffuser, Perforated Face Ceiling Diffuser, Ceiling Diffuser, Diffuser

References

- 
[Text.name](#)