



PUSR USR-W660 Dual Band WiFi Device Server Owner's Manual

[Home](#) » [PUSR](#) » PUSR USR-W660 Dual Band WiFi Device Server Owner's Manual 



www.pusr.com

Communication Expert of Industrial IOT
Dual Band WiFi Device Server
USR-W660



Contents

- [1 Introduction](#)
- [2 Product Features](#)
- [3 SPECIFICATION](#)
- [4 Purchase & Support](#)
- [5 Documents / Resources](#)
- [5.1 References](#)

Introduction

USR-W660 is a Wi-Fi 6 industrial wireless device with high speed, wide connection, low delay, and high stability. The measured rate of Wi-Fi 6 is up to 800Mbps. In AP hotspot mode, it can carry more than 8 Wi-Fi users. It integrates rich hardware interfaces: 1*RS232, 1*RS485, Ethernet ports (1LAN+1WAN/LAN). It supports AP/STA/AP+STA/bridge mode and can provide stable and reliable networking solutions for different scenarios and industries.

This device adopts industrial-grade standards: wide temperature and wide voltage, EMC protection. In software, it supports MODBUS, MQTT, TCP, UDP and other transmission protocols. The device supports single-link fast roaming. In a wireless local area network composed of multiple APs, roaming can be realized without AP switching operations. The built-in software and hardware dual watchdog, fault self-recovery can ensure the device operate stably and reliably in different harsh environments and industry scenarios like AGV automated transportation, robot, smart medical, smart storage, smart factories etc.

Product Features

Stable And Reliable

- Metal housing, IP30 protection
- Wide operating temperature: -35°C~+70°C
- EMC protection: Surge protection, level 3; ESD protection, level 3; EFT protection, level 3; IEC61000
- voltage input: DC 12V, with power reverse protection.
- Built-in hardware watchdog, fault self-detection, self-repair, firmware backup and restore functions to ensure system stability without crashing.
- Supports wall mounting, Din rail mounting, desktop placement.

Flexible Networking

- Support WIFI6 technology (IEEE 802.11 ax), support dual-band WIFI (2.4 and 5G) AP/STA/AP+STA/bridge mode.
- Support fast Wi-Fi roaming, network switching as low as 100ms.
- Support Gigabit ports: 1 x WAN/LAN, 1 x LAN.
- Support RS232/RS485, serial port data acquisition is easier.
- Compatible with mainstream industrial protocols: TCP/UDP/MODBUS/HTTP/MQTT/SNMP, etc.
- Supports connecting to mainstream cloud platforms such as Alibaba Cloud and AWS Cloud, making it easy for devices to go to the cloud.

Powerful features

- Support a complete anti-drop mechanism to ensure the stability of data transmission.
- Support wired/STA multi-network intelligent backup function, keep the link always unblocked.
- Support PUSR service, users can open the built-in webpage operation and maintenance of wireless client through PUSR platform, which facilitates centralized management of equipment



Support SNMP, NTP time calibration, MAC-IP binding, anti-access restriction and other special functions.

Dimensions

Unit: mm

With pleural spreading

SPECIFICATION

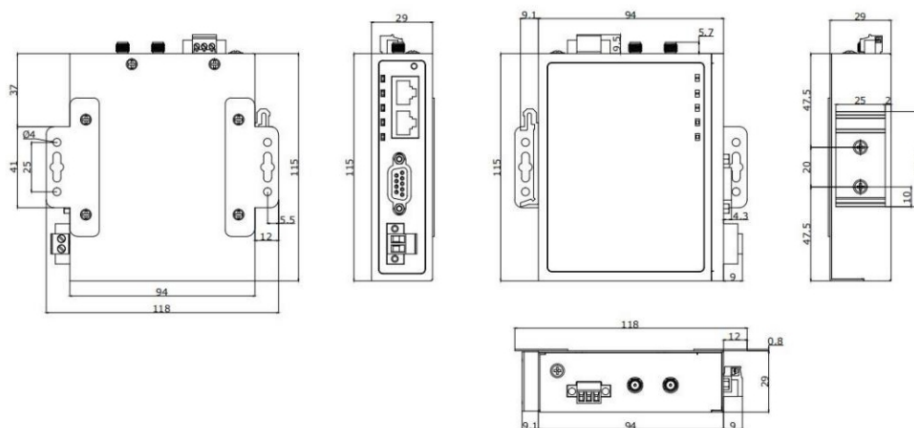


Fig.1 Dimension

With pleural holding

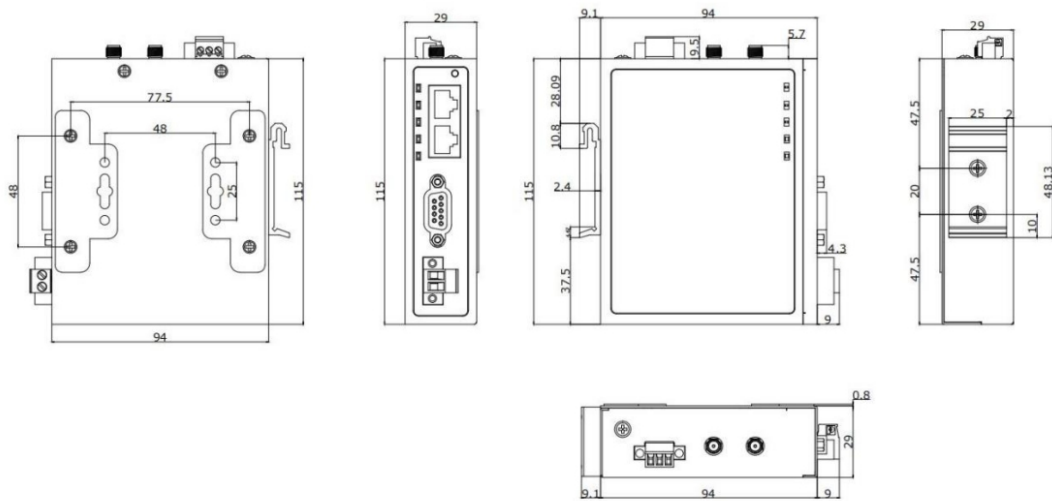


Fig.2 Dimension

Items	Description
Power Supply	DC: 12V, 2-pin terminal blocks, reverse polarity protection, surge protection

Working Current	Average: 600mA@12V, max: 1.35A @12V
Serial port	
No.	1 x RS485, 1 x RS232, can't work simultaneously.
Baud rates	RS232: 1200 ~ 115200bps RS485: 1200 ~ 230400bps
Data bits	7, 8
Stop bits	1, 2
Parity	NONE, ODD, EVEN
Packaging Interval	Range: 1 ~ 3000ms, default: 50ms
Packaging Length	Range: 5 ~ 1500 bytes, default: 1000 bytes
Ethernet Ports	
No.	2 x Ethernet ports: 1 x WAN/LAN(configurable), 1 x LAN
Interface	RJ45, 10/100/1000 Mbps, compliance with IEEE 802.3, supports auto MDI/MDIX, 1.5 KV network isolation transformer protection
Wi-Fi	
Standards & Frequency	IEEE 802.11b/g/n/ac/ax, 2.4GHz & 5.2G & 5.8G
Working Mode	AP/STA/AP+STA/Bridge
Data speed	1201Mbps(5.2GHz& 5.8G) & 573.5Mbps(2.4GHz)
MU-MIMO	2 x 2
OFDMA	DL-OFDMA 8(8 users); UL-OFDMA (4 users)

Covering distance	200 meters by line of sight.Actual transmission distance depends on environment of the site.
Wi-Fi Users	8 +
Antenna	2 x SMA-female
Wi-Fi Roaming	√
Physical Property	
Casing material	Metal shell, IP30 protection
Dimensions	115*94*29mm(L x W x H, antenna pedestal,terminal block and DIN Rail are not included)
Installation	Wall mounting, Din rail mounting, desktop placement
EMC	Surge protection: level 3, IEC61000 ESD protection: level 3, IEC61000 EFT protection: level 3, IEC61000
Operating temperature	-35°C +70°C
Storage temperature	-40°C +125°C
Operating humidity	5% ~ 95% RH, non-condensing
Storage humidity	1% ~ 95% RH, non-condensing
Software Function	
Network protocols	TCP, UDP, HTTP, TLS, MQTT, ARP, DHCP, ICMP, PPPoE, IPv4, DNS, SNMP, NTP,
Modbus Gateway	Modbus RTU/TCP protocol conversion, Modbus multi-host polling
IP	DHCP/StaticIP
MQTT	standard MQTT protocol, 16 subscription topics and 16 publish topics
IOT PLATFORMS	AWS IOT, Alibaba cloud, PUSR cloud
User Configuring	Web console(HTTP)
Others	
Reload	Pinhole reset button
Indicators	1 x RS485, 1 x RS232, 1x WLAN, 1 x RUN, 1 x PWR

Ground protection	Screw
APPROVALS	
Regulatory	CCC, CE/RED*, RoHS*, WEEE*, FCC*

Purchase & Support

- For more information, please visit our websites:
- Official website: <https://pusr.com>
- Official shop: <https://shop.usriot.com>

- Technical support: <http://h.usriot.com/>

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



Official Website: www.pusr.com

Official Shop: shop.usriot.com

Technical Support: h.usriot.com

Inquiry Email: inquiry@usriot.com

Skype & WhatsApp: +86 13405313834

Click to view more: [Product Catalog](#) & [Facebook](#) & [Youtube](#)



Documents / Resources



[PUSR USR-W660 Dual Band WiFi Device Server](#) [pdf] Owner's Manual
2ACZO-USR-W660, 2ACZOUSRW660, USR-W660, USR-W660 Dual Band WiFi Device Server, Dual Band WiFi Device Server, WiFi Device Server, Device Server, Server

References

- [🔗 Submit Ticket - USR Technical Support Center](#)
- [🔗 Submit Ticket - USR Technical Support Center](#)
- [👤 -USR IOT Store for IoT Devices and IoT Modules](#)
- [🚀 4G LTE/5G Cellular Routers/Gateways/Modems for Industrial IoT devices - PUSR](#)
- [🚀 4G LTE/5G Cellular Routers/Gateways/Modems for Industrial IoT devices - PUSR](#)
- [🌐 Official USR IOT Shop](#)
- [🌐 Official USR IOT Shop](#)
- [👤 -USR IOT Store for IoT Devices and IoT Modules](#)
- [👤 -USR IOT Store for IoT Devices and IoT Modules](#)
- [🚀 \[Product Catalog\] USR Product Catalog-PUSR IOT](#)
- [📖 User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.