



PYLE PSTG1050 Professional Line Array Column Speaker User Guide

[Home](#) » [Pyle](#) » PYLE PSTG1050 Professional Line Array Column Speaker User Guide 

Contents

- [1 PYLE PSTG1050 Professional Line Array Column Speaker](#)
- [2 Features](#)
- [3 Wireless BT Streaming](#)
- [4 What's in the Box](#)
- [5 Subwoofer Specs](#)
- [6 Driver Specs](#)
- [7 Technical Specs](#)
- [8 Function Description](#)
- [9 Function Description](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



PYLE PSTG1050 Professional Line Array Column Speaker



PLEASE READ THIS MANUAL CAREFULLY BEFORE OPERATION

Features

- Loudspeaker PA System One
- Rugged, Durable & Reliable Sound
- Wireless BT Streaming Ability
- Wireless BT Music Streaming Ability
- Speaker System: 1×10" Subwoofer, 8×3" Neodymium Full Arrange Speaker
- Built-in Digital Audio Amplifier with 4 Band DSP EQ Presets: Main, Monitor, DJ, Speech
- 2 x XLR/F ¼" -inch Combo (MIC/Line Input)
- 2 x 1/4" Jack line in, RCA input, 1*Aux (3.5mm) Input, XLR Output
- Connect & Stream Audio from External Devices
- TOP Panel Rotary Dial & Button Control Center
- Master Volume, SUB Volume, Treble, Bass Adjustable, Reverb
- Integrated Carry Handles
- Heavy Duty Engineered ABS Housing

Wireless BT Streaming

- Instantly Stream Music from Your BT Devices
- Works with All Your Favorite BT Devices (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Wireless BT Version: 5.0
- Wireless BT Range: 100'+ Feet
- Wireless BT Network Name: 'Pyle'

What's in the Box

- PA System One
- Power Cable

Subwoofer Specs

- Size: 10" -inch
- Material: Stamped Steel Basket
- Impedance: 4 Ohm
- Magnet: 30 oz.
- Voice Coil: 75mm, 1.5" -inch
- Sensitivity: 120dB
- Frequency Response: 50Hz – 16kHz

Driver Specs

- Size: 3" -inch
- Material: Neodymium Magnetic
- Impedance: 16 Ohm
- Sensitivity: 104dB
- Voice Coil: Kapton
- Frequency Response: 200Hz-16kHz

Technical Specs

- Max Power Output: 1600 Watt
- RMS Power Output: 350 Watt
- Amplifier Class: D
- Inputs/Outputs XLR/F 1/4-Inch combo 1/4" TS/unbalanced and 3.5mm TRS/Stereo Input with RCA
- Input T.H.D.: 1%
- Crossover Frequency: 200Hz
- Power: 110-240V/ AC 50/60HZ
- Subwoofer Dimensions (L x W x H): 13" x 15.35" x 18.11" -inches
- Column Dimensions (L x W x H): 3.74" x 3.54 x 29.53" -inches

Function Description


1. CH1/CH2 LINE IN/MIC IN Mix jack
2. LINE IN/MICIN Switch of CH1/CH2
Corresponding Channel
3. CH1/CH2 Corresponding Channel Volume control
4. CH1/CH2 Corresponding Channel Volume control effect
5. CH1/CH2 Corresponding Channel Bass control
6. CH1/CH2 Corresponding Channel Treble control
7. DSP mode selector switch and mode indicator

8. Wireless BT pairing button: Press and hold the button, the indicator light ashes slowly, then press the indicator, the light ashes quickly.

Now you can connect your BT device such as mobile phone.

9. Link button: When two machines are used together, presses this button to pair as a stereo.
10. Indicator lamps: Signal indicator, power supply indicator and limit indicator
11. Subwoofer volume control
12. The whole device volume control
13. CH3/CH4 Volume control
14. CH3/CH4 3.5mm input jack
15. CH1/CH2CH3/CH4/BT Mixed Signal LINE OUT
16. CH3/CH4 RCA input jack
17. CH3/CH4 6.35mm input jack
18. Main power switch
19. Fused IEC mains inlet

Function Description

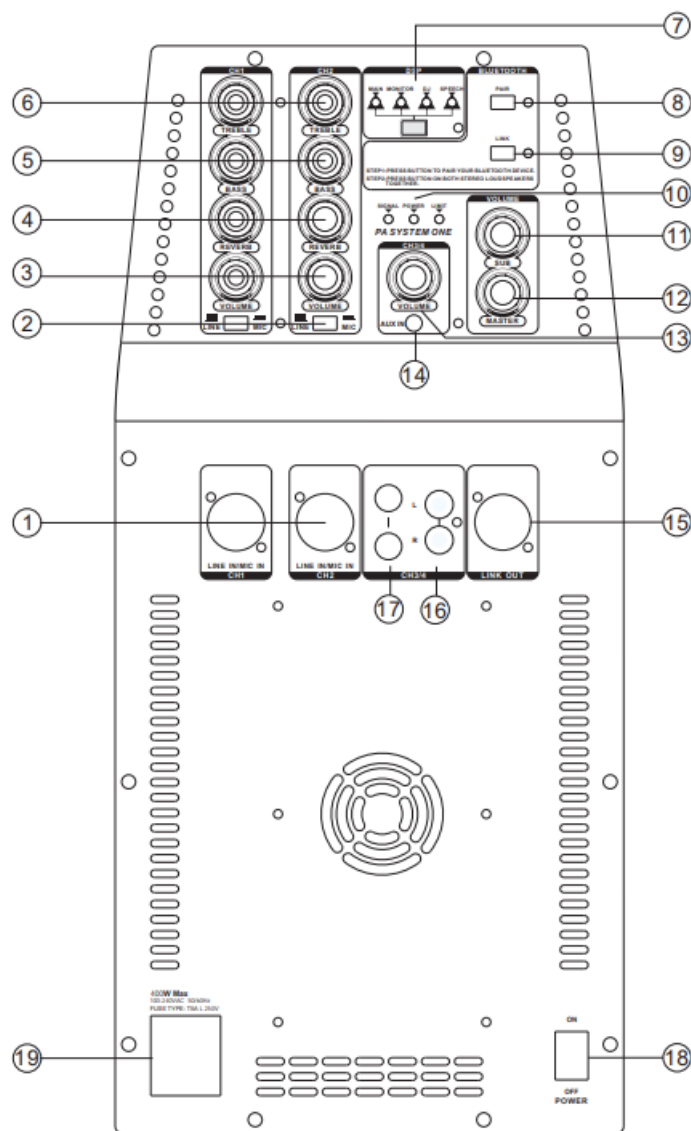

Questions? Comments?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

Documents / Resources



[PYLE PSTG1050 Professional Line Array Column Speaker](#) [pdf] User Guide
PSTG1050 Professional Line Array Column Speaker, PSTG1050, Professional Line Array Column Speaker, Line Array Column Speaker, Array Column Speaker, Column Speaker, Speaker

References

- [P Pyle USA Electronics | Home Audio | Car Audio & More](#)

[Manuals+.](#)