




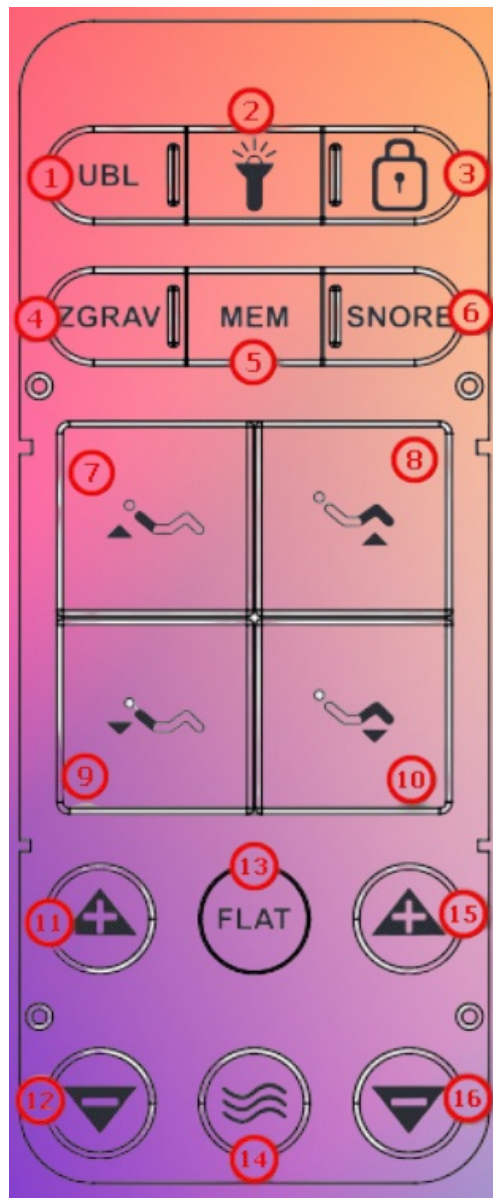
[Home](#) » [Qingdao Intelligence](#) » **Qingdao Intelligence HJSR81C Ble Remote Control Instruction**
Manual 

Contents [[hide](#)]

- [1 Qingdao Intelligence HJSR81C Ble Remote Control](#)
- [2 Product Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Remote Control Key Diagram](#)
- [5 Remote control function description](#)
- [6 FCC STATEMENT](#)
- [7 Frequently Asked Questions](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

Qingdao Intelligence

Qingdao Intelligence HJSR81C Ble Remote Control



Product Specifications

- **Model:** HJSR81C Ble
- **Key Label:** Remote Control Key Diagram
- **Feature:** Remote Control Function Description

Product Usage Instructions

Underbed Light and Flashlight Control

To turn on/off underbed light, press UBL button. The flashlight can be turned on/off with a default duration of 15 seconds.

Reuse Function: Hold UBL button for 5 seconds to enter memorizable mode. Follow on-screen instructions to remember motor position, massager status, and light bar status.

Reset and Key Lock Function

To reset all memory positions to factory defaults, simultaneously hold flashlight and LOCK buttons for about 3 seconds. To lock/unlock keys, follow the specified instructions.

Motor Operation and Multiplex Function

ZG Position: Hold flashlight for 5 seconds, press ZG within 2 seconds to record current motor position to ZG.

M1 Position: Similar to ZG position, but press M1 within 2 seconds to record motor position to M1.

SNORE Position and Rise/Drop Function


SNORE Position: Hold flashlight for 5 seconds, press SNORE within 2 seconds to record current motor position to SNORE.

Rise/Drop Function: Use specified keys to control the rise or drop of back and leg motors.

Head Massager Control

If head massager is closed, press the button to open it. Press the button again to increase strength (low -> medium -> high). Default operation time is 15 minutes.

Remote Control Key Diagram

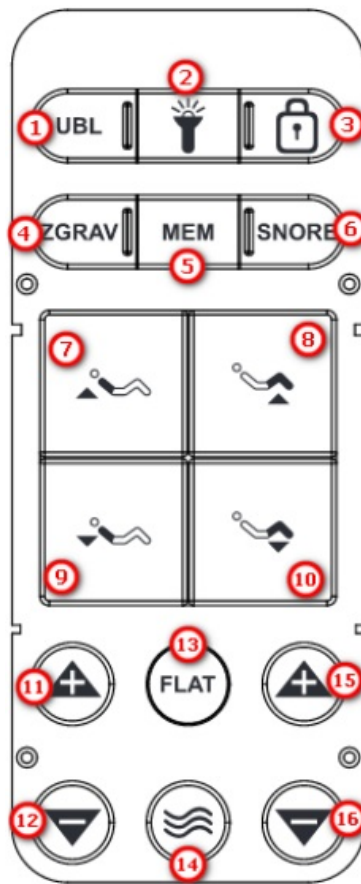

Remote control function description

HJSR81C Ble

Key label	Feature
1	UBL: Underbed light on/off (steady on)

2	<p>Flashlight on/off (default 15s). Reuse function:</p> <p>① Hold down the button for 5s, the backlight flashes, enter the memorable mode, press ZG/SNORE/M1 within 2s, the buzzer “beep” sound, you can remember the current motor position and the status of the massager and the light bar.</p> <p>② Hold the flashlight +LOCK (lock) for about 3s at the same time, the backlight flashes twice, and the keys in all positions of the remote control enter the one-button release mode, which can reset all memory positions to the factory default memory positions at the same time.</p> <p>③ Press and hold the flashlight +FLAT for about 3s at the same time, the backlight flashes three times, the keys in all positions of the remote control enter the continuous press mode, release the key and stop the motor.</p>
---	--

3	<p>Key lock function: Long press the key for 5 seconds, the backlight flashes 3 times, lock the remote control key, then the remote control key is unavailable, press the key other than the lock key, the backlight flashes 3 times (power off and then power on to keep the lock state) Press the button again for 5 seconds, the backlight flashes 3 times, unlock the remote control button, then the remote control button can be used.</p>
4	<p>Motor one-click operation to ZG position (with initial value)</p> <p>Multiplex function: Press and hold the flashlight for about 5s, the backlight blinks, press ZG within 2s, the buzzer rings 3 times, and record the current motor position, massager and light bar status to ZG. (Power off does not clear)</p>

5	<p>Motor one-click run to M1 position (with initial value) Multiplexing function: Hold the flashlight for about 5s, the backlight blinks, press M1 within 2s, the buzzer rings 3 times, and record the current motor position and the status of the massager and the light bar to M1. (Power off does not clear)</p>
6	<p>Run the motor to the SNORE position with one key (with initial value). When the one-key release mode is used, flatten and close the massager after 15min. Press any key to exit the timing. Continuous press mode no timing.</p> <p>Multiplexing function: Hold the flashlight for about 5s, the backlight blinks, press SNORE within 2s, the buzzer rings 3 times, and record the current motor position and the status of the massager and the light bar to SNORE.</p> <p>(Power off does not clear)</p>
7	<p>Back rise: Hold down this key, the back motor starts to rise, release this key, the back motor stops rising</p>
8	<p>Leg rise: Hold down this key, the leg motor starts to rise, release this key, the leg motor stops rising</p>
9	<p>Back down: Hold down this key, the back motor starts to fall, release this key, the back motor drop stops</p>
10	<p>Leg drop: Hold down this key, leg motor start to drop, release this key, leg motor drop stop</p>

11	If the head massager is not opened, press the button to open the massager, the massager is the last closed state by default, if the massager is opened, press the button to increase the strength of the head massager, 3 strengths, in the order of: low – > medium – > high, the default time is 15 minutes, and the operation continues when the highest strength is reached.
----	--

12	Reduce the strength of the head massager, 3 strengths, when the lowest strength is reached, press the massager again to close.
13	FLAT one-button reset, all motors retracted to the minimum stroke position, turn off the massager, and keep the lamp under the bed in the state before pressing the button (power-on without reset)
14	<p>Mode switching: CONSTANT- Low speed WAVE- Medium speed WAVE- high speed WAVE</p> <p>Press and hold for 5s to turn off the massager. The intensity remained unchanged after the mode was switched.</p>
15	If the massager is not opened, press the button to open the massager, the massager is the last closed state by default, if the massager is opened, press the button to increase the strength of the foot massager, 3 strengths, in the order of: low – > medium – > high, the default time is 15 minutes, and the operation continues when the highest strength is reached.
16	Reduce the strength of the foot massager by 3, and press the massager again to close when it reaches the lowest strength.

Coding method:

Keep pressing the head lift and foot drop buttons until the backlight flashes to clear the remote control code information; Power on the control box again, and the control box will

be in the code alignment state within 60 seconds. Keep pressing the head down and foot up buttons of the remote control until the buzzer sounds and the backlight blinks, indicating that the code alignment is successful.

Decoding mode:

[remote control head up + foot down] The backlight flashes, indicating successful decoding

* The control box has no reset function for code keys

Note:

Press any key over 50s, the remote control will enter sleep, release and press again to restore the function

FCC STATEMENT**Caution:**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Frequently Asked Questions

Q: How do I reset all memory positions to factory defaults?

A: Simultaneously hold flashlight and LOCK buttons for about 3 seconds to reset memory positions.


Q: How do I lock/unlock the remote control keys?

A: Long press a key for 5 seconds to lock it. Repeat the process to unlock the key.

Q: How do I adjust the strength of the head massager?

A: Press the button when the massager is open to cycle through low, medium, and high strength levels.

Documents / Resources

	Qingdao Intelligence HJSR81C Ble Remote Control [pdf] Instruction Manual HJSR81C Ble Remote Control, HJSR81C, Ble Remote Control, Remote Control
---	---

References

- [User Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.