

Quest Pinpointer Metal Detector Instruction Manual

Home » Quest » Quest Pinpointer Metal Detector Instruction Manual





Contents

1 Pinpointer Metal


2 Documents / Resources

Pinpointer Metal Detector

- Insert battery: Rotate the battery cap counter clockwise, to open the battery compartment. Insert a new 9V battery (note polarity). 8
- Power on/off: Press and hold the upper button, until you hear a sound. Two sounds and the LED-Light indicate, that the pinpointer is ready to search. 5 4
- A metal object is signaled by increasing sound and vibration, the nearer the pinpoint tip and side scan area get to it. 13
- Switch between tone+vibration/ tone/vibration by pressing the lower button multiple times. 6
- Change the sensitivity level by holding the lower button and pressing the upper button at the same time. The sound indicates the current sensitivity level. 1 to 3 sounds = sensitivity level 1 to 3, permanent sound = level 4.
- If the XPointer has not been used for 3 minutes or the battery runs low, an alarm tone is played.
- · Keep the O-ring clean and greased.



Documents / Resources

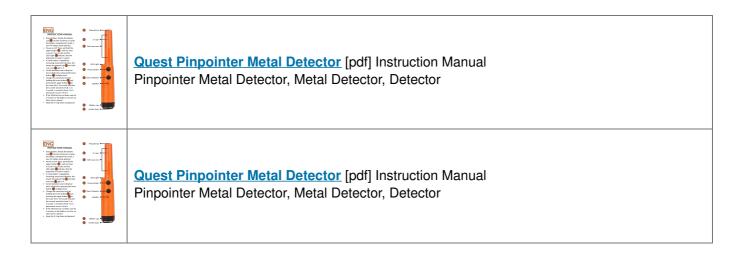

Manuals+,