



RAB STRING34-50 LED String Light Instructions

[Home](#) » [RAB](#) » RAB STRING34-50 LED String Light Instructions 

RAB STRING34-50 LED String Light



Contents


- [1 Other Models](#)
- [2 IMPORTANT](#)
- [3 PRODUCT INFORMATION](#)
- [4 INSTALLATION](#)
- [5 LINKABLE](#)
- [6 CLEANING & MAINTENANCE](#)
- [7 TROUBLESHOOTING](#)
- [8 CUSTOMER SUPPORT](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

Other Models

- STRING34-50




- STRING34-100

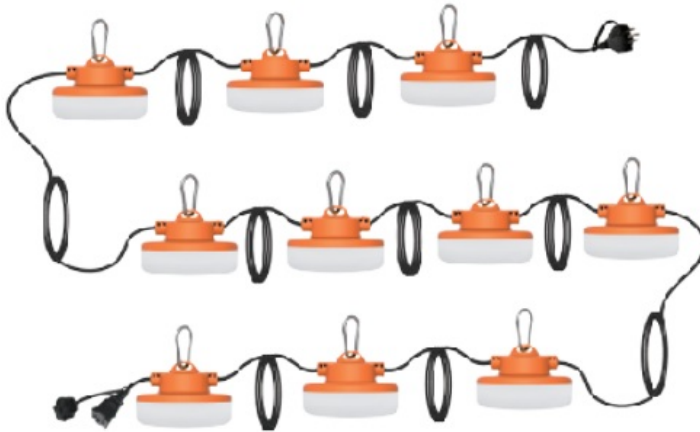

- STRING17-50



- STRING17-100

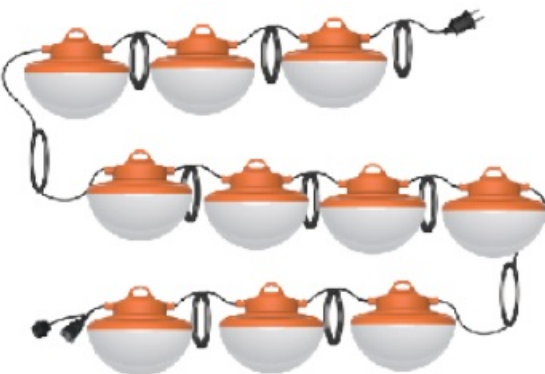

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION

OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING:

- When using product, basic precautions should always be followed.
- Read and follow these instructions and observe all warnings.
- Carefully read and understand the information given in this manual before beginning installation. Failure to do so could lead to electric shock, fire, or other injuries which could be hazardous or even fatal.
- Save these instructions and warnings.

CAUTION

- Make sure the distances between live part and metal part of the device can satisfy reinforce or double insulation.
- Before installation and maintenance of the device, please disconnect the power to prevent electric shock.
- The LED temporary light string must be installed in an appropriate environment, operating in harsh environments may shorten the lifespan or even damage the device.
- Please keep the device away from any corrosive substance, clean with dry cloth only.
- To ensure personal safety, please make sure the device is staying firmly and securely when install on high places.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


PRODUCT INFORMATION

Power	Voltage	Current	Qty	Lumen	Cable	Suitable for Wet Locations
65W	AC 120V	1.20A	5 units	8000 lm	18 SJTW /2 A WG	
130W	AC 120V	2.40A	10 units	16000 lm	18 SJTW /2 A WG	
50W	AC 120V	0.92A	5 units	6000 lm	SPT-2W 18/2 AWG	
100W	AC 120V	1.85A	10 units	12000 lm	SPT-2W 18/2 AWG	

Application:

Suitable for construction sites or any other location requiring a temporary light string.

INSTALLATION



LINKABLE

65W – For only use with this product connect up to 6 bunches

130W – For only use with this product connect up to 3 bunches

50W – For only use with this product connect up to 8 bunches

100W – For only use with this product connect up to 4 bunches



CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch.

Do not clean or maintain while fixture is energized.

1. Turn power OFF.
2. Use a soft cloth and a mild, non-abrasive glass cleaner.
3. Lightly wipe and clean the fixture.

DO NOT use solvents.

DO NOT use cleaners containing abrasive ingredients.

NEVER spray cleaning liquid directly onto the LEDs, fixture, or wiring.

TROUBLESHOOTING

Problem	Probable Cause	Solution
Fixture does not turn on.	Bad connection.	Check wiring connections.
	Faulty switch.	Test switch or replace it.
	Power is off.	Verify power supply is on.
Circuit breaker trips or fuse blows when light is turned on.	Discontinue use immediately.	Call an electrician.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com

CUSTOMER SUPPORT

Easy Answers
© 2024 RAB LIGHTING Inc.
Cranbury, New Jersey 08512 USA
STRING-IN-0822
rablighting.com

Visit our website for product info
Tech Help Line
Call our experts: 888 722-1000
e-mail


Answered promptly – sales@rablighting.com
Free Lighting Layouts

Answered online or by request

RAB WARRANTY: RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.



Documents / Resources

	<p>RAB STRING34-50 LED String Light [pdf] Instructions STRING34-50, STRING34-100, STRING17-50, STRING17-100, STRING34-50 LED String Light, STRING34-50, LED String Light, String Light</p>
---	--

References

- [R Legal - RAB Lighting](#)
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.