




RaspberryPi RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status Owner's Manual

[Home](#) » [RaspberryPi](#) » RaspberryPi RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status Owner's Manual 📖



Raspberry Pi

**RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status
Owner's Manual**

Intelligent control of fan speed Real time display of status




Contents

- 1 RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status
- 2 Configuration
- 3 Programmable RGB light
- 4 Raspberry Pi 10 interface out
- 5 Given tutorials
- 6 Package list:
- 7 Documents / Resources
 - 7.1 References
- 8 Related Posts

RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status

(For Raspberry pi 4B/3B+/3B)

Five functions

	Board protection
	Active cooling
	Real time status display
	External extension
	Programming RGB light

Configuration


Standard Version (including OLED screen)



The standard version includes OLED display, which can display the running status of Raspberry Pi in real time. (such as memory. CPU, temperature, IP address. hard disk capacity, etc.)

Real time display of Raspberry Pi status

OLED screen can display CPU temperature, CPU utilization, hard disk space, RAM, IP address.

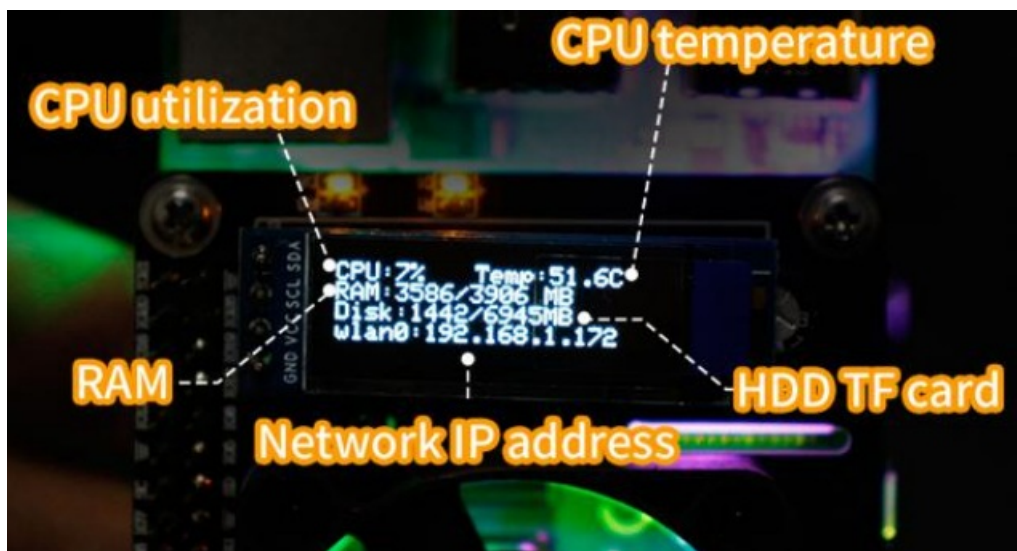

Real time reading temperature

Intelligent active cooling

According to the CPU temperature, intelligently adjust the fan speed to make the Raspberry Pi work stably.



Fan speed can be set freely

The default speed of exit is set as follows. The fan speed in each temperature zone can be set to meet various usage scenarios.



Fan speed can be set freely

Supplied drive package, which is suitable for pi4B/3B/3B+ image

Temperature	Fan speed
50°C	50%
55°C	75%
60°C	90%
65°C	100%

Programmable RGB light

The temperature control expansion board has three high-bright RGB programming lights on the board. The RGB lights can be programmed to emit different colors. The RGB lights can be used to indicate the RAM usage, CPU usage and the temperature of the motherboard.



#The RGB light color can be used to usage, CPU usage and 4' merat


Provides multiple light mode commands

Equipped with 3 high brightness programmable RGB lights



Raspberry Pi 10 interface out


Lead IO interface out

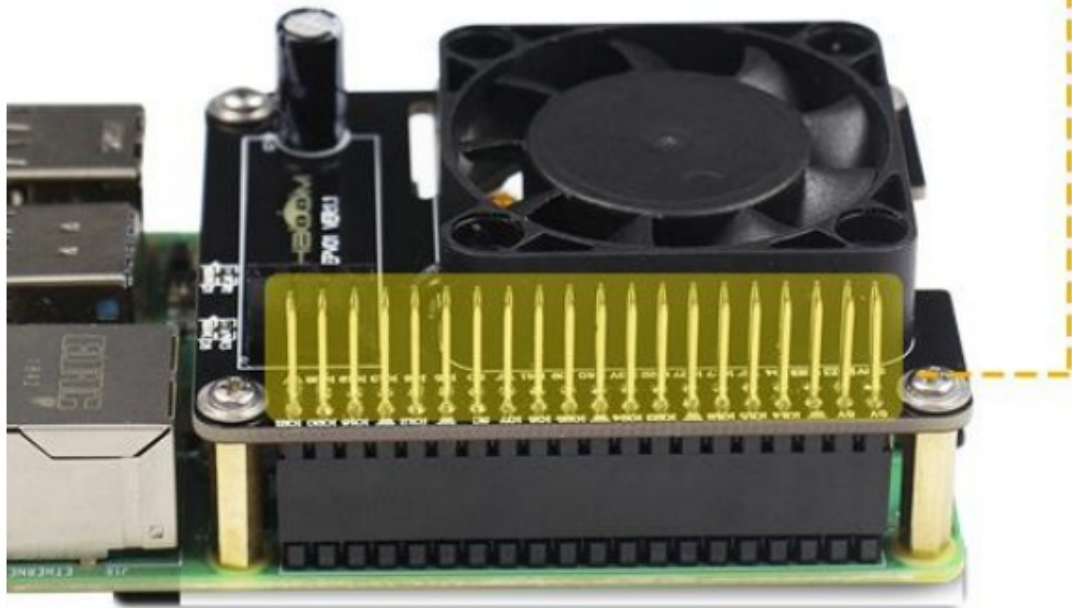

The expansion board leads out all 10 ports of Raspberry Pi. It can be used after plugging.
Large size cooling fan Stronger heat dissipation



Most of them use 30mm * 30MM small cooling fan on the market
Strong wind/better heat dissipation/bigger size
It can be used superimposed with heat sink

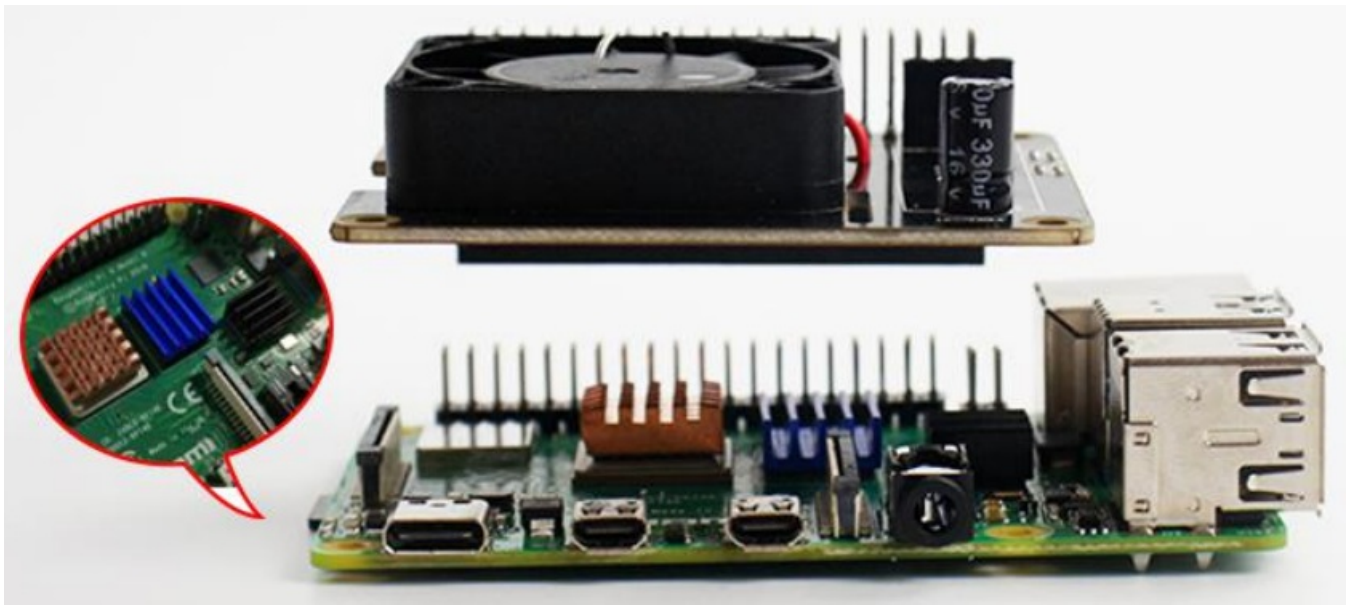

Given tutorials



*We provided driver package for all Raspberry Pi system images.
All fan, RGB lights, OLED can be driven by this driver package.

Detail :

Raspberry Pi cooling HAT expansion board:

Size: 61mm*59mm

Weight: 34.1g

Cooling fan:

Size: 40mm*40mm

Package list:

Raspberry Pi cooling HAT expansion board*1


Copper column *4

Screw *8

OLED display *1

Packing list

Expansion board with OLED display

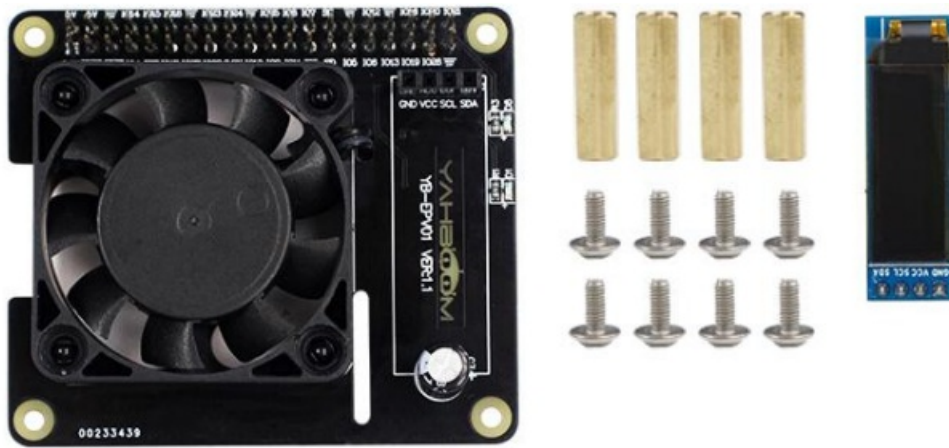

Tutorial:



Documents / Resources

	RaspberryPi RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status [pdf] Owner's Manual Raspberry Pi 4b, 3bplus, 3b, RGB Cooling HAT Intelligent Control of Fan Speed Real Time Display of Status, RGB Cooling HAT, Intelligent Control of Fan Speed Real Time Display of Status
--	--

References

-  [Study](#)

Manuals+.