

 **Razor**
Razor
B07G5L1Q
2Q Dune
Buggy



Razor B07G5L1Q2Q Dune Buggy User Guide

[Home](#) » [Razor](#) » Razor B07G5L1Q2Q Dune Buggy User Guide 

Contents

- [1 Razor B07G5L1Q2Q Dune Buggy](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Tools Required: \(Not included\)](#)
- [5 INSTALLATION STEPS](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



Razor B07G5L1Q2Q Dune Buggy



Product Information

Specifications:

- Tools Required: Phillips head screwdriver, Flat head screwdriver, 4mm open wrench (not included)
- Manufacturer: Razor
- Model: Dune Buggy Power Switch
- Color: Black

Product Usage Instructions

- The black wire from the charger port connects to the Gold colored prong.
- The red wires from the controller can be connected in any sequence on the silver prongs of the power switch.

FAQ

- **Q: How do I contact customer support for assistance?**

You can visit our website at www.razor.com or call toll-free at [866-467-2967](tel:866-467-2967) Monday – Friday 8:00am – 5:00pm Pacific Time for assistance.

Tools Required: (Not included)

- Phillips head screwdriver
- Flat head screwdriver
- 4mm open wrench

WARNING

CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before removing or installing the batteries. Failure to follow these steps in the correct order may cause irreparable damage.

INSTALLATION STEPS

1. Step 1

Remove the 4 phillip screws at the back of the battery cover of your unit

2.



Figure 1

Step 2

Remove two 4mm hex screws on the right side of the battery tray

3.



Figure 2

Step 3

Remove two 4mm hex screws on the left side of the battery cover and 1 phillip screw located in the middle left

side of the battery cover and remove the cover away from the unit carefully disconnect the wires connected to the power switch and charger port.

4.

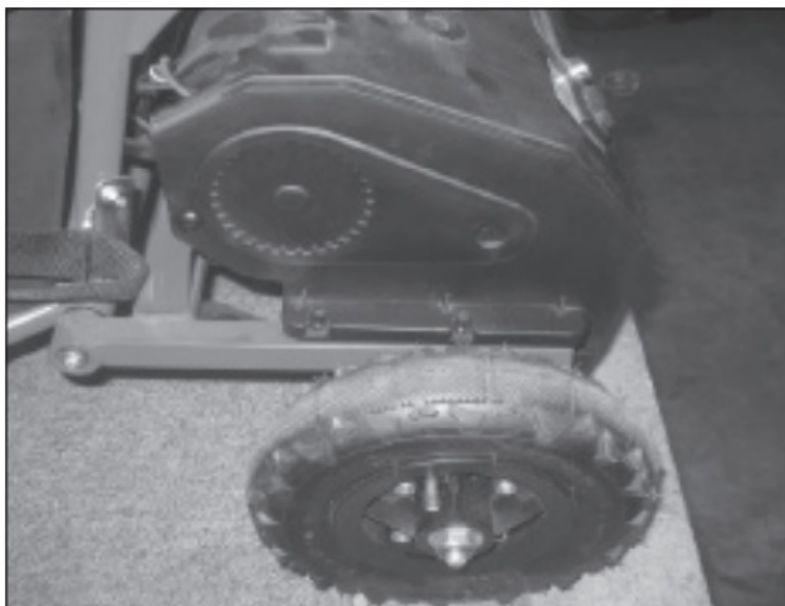


Figure 3

Step 4

Disconnect the black wire from the charger port that connects to the power switch.

5.

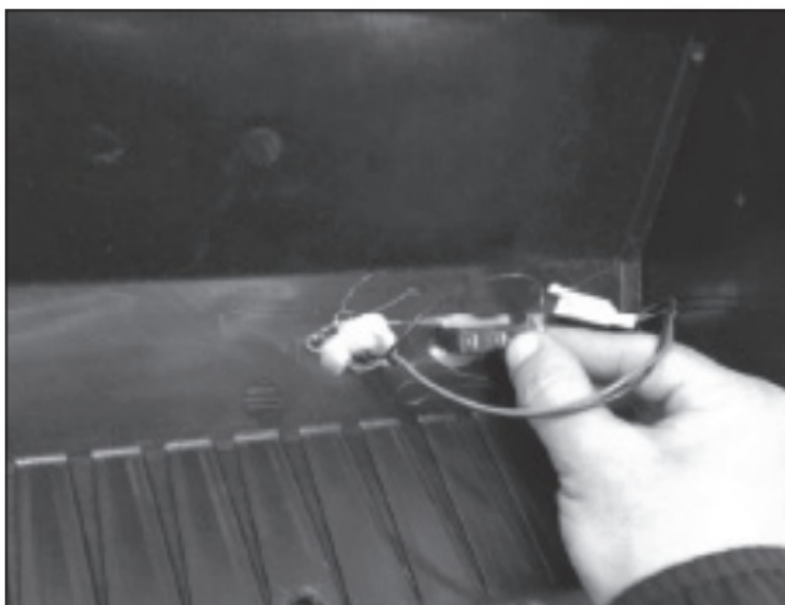


Figure 4

Step 5

Using a flat screw driver remove the silicone at the Power switch and push the switch out of the cover.

6.

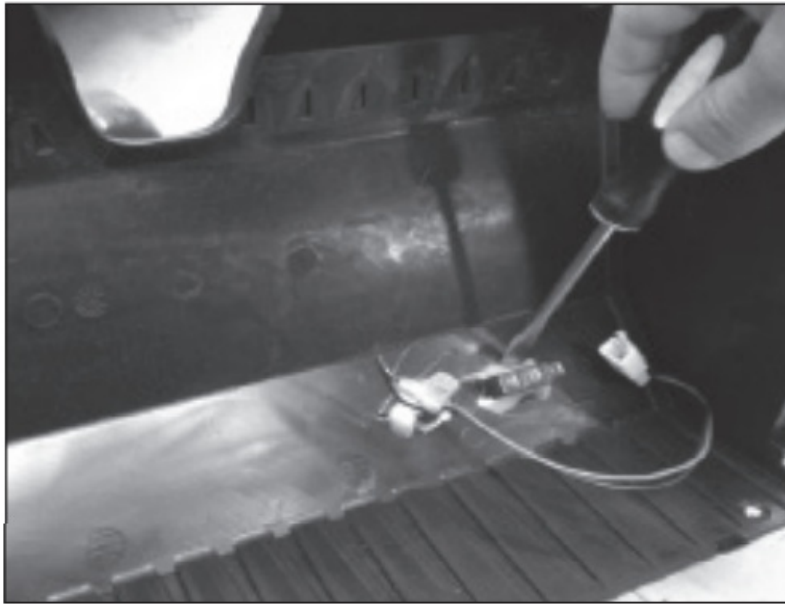


Figure 5

Step 6

After installing the new power switch on the battery cover it is very important that you connect the wires in following sequence, the black wire coming from the charger port can only be connected on the Gold colored prong and the red wires from the controller can be connected in any sequence on the silver prongs of the power switch.

7.

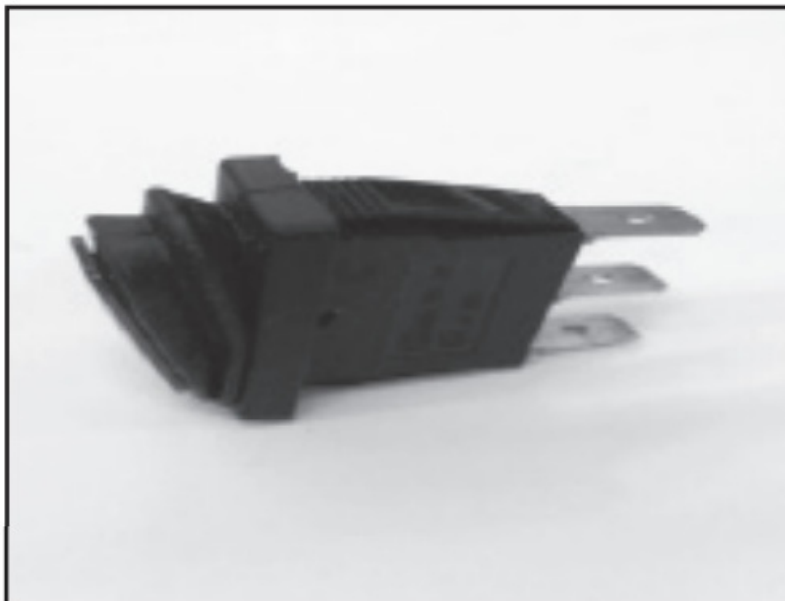


Figure 6


Step 7

Reverse the procedures to install.

ATTENTION: Charge battery 12 hours before using

Need Help? Visit our website at www.razor.com or call toll-free at [866-467-2967](tel:866-467-2967) Monday – Friday 8:00am – 5:00pm Pacific Time.

Documents / Resources

	<p>Razor B07G5L1Q2Q Dune Buggy [pdf] User Guide B07G5L1Q2Q Dune Buggy, B07G5L1Q2Q, Dune Buggy, Buggy</p>
--	---

References

-  [Razor | Scooters and Ride-ons for the whole family](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.