



RCF MR 40T Pair Of Two Way Speakers Owner's Manual

[Home](#) » [RCF](#) » RCF MR 40T Pair Of Two Way Speakers Owner's Manual 

Contents

- [1 RCF MR 40T Pair Of Two-Way Speakers](#)
- [2 Product Usage Instructions](#)
- [3 Frequently Asked Questions](#)
- [4 Description](#)
- [5 Features](#)
- [6 Part Number](#)
- [7 Dimension](#)
- [8 TECHNICAL SPECIFICATIONS](#)
- [9 ACCESSORIES](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



RCF MR 40T Pair Of Two-Way Speakers



Product Usage Instructions

Installation

1. Choose a suitable location for installation, considering indoor or outdoor placement.
2. Mount the speakers using the provided wall mount bracket.
3. Ensure proper alignment for optimal sound dispersion.

Connection

1. Connect the input and output cables to the Euroblock connectors.
2. Select the appropriate transformer power setting based on your setup requirements.

Operation

1. Power on the amplifiers connected to the speakers.
2. Adjust volume levels as needed for your listening environment.

Frequently Asked Questions

- **Q: Are these speakers suitable for outdoor use?**
 - **A:** Yes, the MR 40T speakers are suitable for both indoor and outdoor installations.
- **Q: What is the recommended power handling for these speakers?**
 - **A:** The speakers have a nominal power handling of 40 W and a peak power handling of 160 W.

Description

MR 40T is a bass-reflex two-way speaker designed to deliver uncompromised audio performance and high reliability in fixed installations. Blend in with any environment and deliver deep bass, smooth midrange, and finely detailed high-frequency response.

Quality components and careful acoustic design make MR 40T the perfect speaker for listening in the most demanding applications. Suitable for indoor and outdoor installation.

Features





- 40 W (8 ohm) / 20 W – 10 W – 5 W – 2.5 W (70/100V) power handling
- 108 dB max SPL
- 70 ÷ 20000 Hz frequency range
- 110° x 100° coverage angles
- 1 x 4" woofer (1" v.c.)
- 1 x 1" dome tweeter (0.8" v.c.) neodymium magnet
- Color black RAL 9005 and white RAL 9003
- IP 55 protection grade
- Swivel wall mount accessory included
- 4 pole EUROBLOCK connector

Part Number

- **13100035 MR** 40T 8ohm Black – RAL 9005 EAN 8024530017262
- **13100037 MR** 40T W 8ohm White – RAL 9003 EAN 8024530017279

Dimension

Line Art 2D

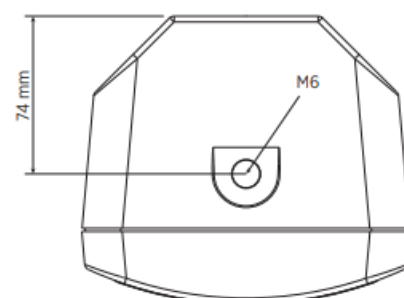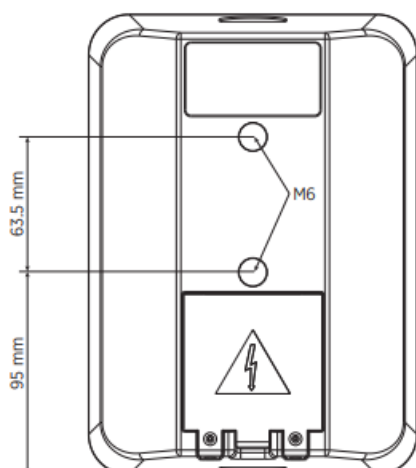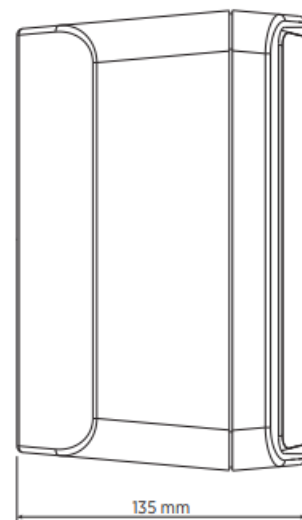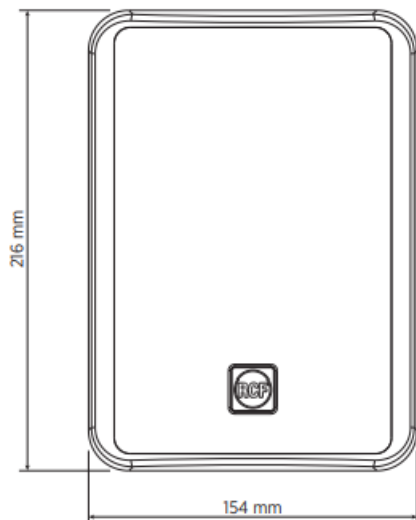

TECHNICAL SPECIFICATIONS

Acoustical specifications

- **Frequency Response** (-10dB) 70 Hz ÷ 20000 Hz
- **Max SPL @ 1m** 108 dB
- **Horizontal coverage angle** 110°
- **Vertical coverage angle** 100°
- **Directivity index** Q 7
- **System Sensitivity** 86 dB

Power section

- **Nominal Impedance** 8 ohm
- **Power Handling** 40 W
- **Peak Power Handling** 160 W PEAK
- **Protections** Bulb lamp
- **Crossover Frequencies** 3000 Hz
- **Recommended Amplifiers** DMA 504, DMA 162, DMA 82, DMA 162P

Transducers

- **Dome Tweeter** 1 x 1.0" neo, 0.8" v.c
- **Woofers** 1 x 4.0", 1.0" v.c

Input/Output section

- **Input connectors** Euroblock
- **Output connectors** Euroblock
- **Constant Voltage** Transformer 70/100 V
- **Power selection 1** 20 W – 500 ohm
- **Power selection 2** 10 W – 1000 ohm
- **Power selection 3** 5 W – 2000 ohm
- **Power selection 4** 2.5 W – 4000 ohm

Standard compliance

- **IP protection grade** IP 55
- **Safety agency** CE-compliant

Physical specifications

- **Cabinet/Case Material** Plastic
- **Hardware** Wall mount bracket
- **Grille** Aluminium

- **Color** Black – RAL 9005, White – RAL 9003

Size


- **Height** 216 mm / 8.5 inches
- **Width** 154 mm / 6.06 inches
- **Depth** 135 mm / 5.31 inches
- **Weight** 2.3 kg / 5.07 lbs

ACCESSORIES

Rigging / Mounting

- **MA 4** 13360367 8024530014308
- **MA 4** 13360368 8024530014315

Documents / Resources

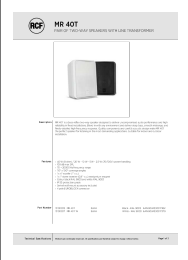	<p>RCF MR 40T Pair Of Two Way Speakers [pdf] Owner's Manual MR 40T, MR 40T Pair Of Two Way Speakers, Pair Of Two Way Speakers, Two Way Speakers, S peakers</p>
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.