




REALTEK RTL8852CE Combo Module User Manual

[Home](#) » [Realtek](#) » REALTEK RTL8852CE Combo Module User Manual 

REALTEK RTL8852CE Combo Module



Contents

[1 ENVIRONMENTAL](#)

[2 Warning](#)

[3 Installing the Wireless PCIe NGFF2230 module](#)

[4 Un-installing the Wireless PCIe NGFF2230 module](#)

[5 Installing the WLAN PCIe & Bluetooth USB NGFF2230](#)

[6 Un-installing the Wireless PCIe NGFF2230 module](#)

[7 CUSTOMER SUPPORT](#)

[8 Documents / Resources](#)

[8.1 References](#)

[9 Related Posts](#)

ENVIRONMENTAL

Operating

Operating Temperature: -20°C to +70 °C

Relative Humidity: 5-90% (non-condensing)

Storage

Temperature: -40°C to +80°C (non-operating)

Relevant Humidity: 5-95% (non-condensing)

MTBF calculation

Over 150,000hours

Warning**Federal Communication Commission Interference Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi-transmitter product procedures. Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without C2PC.

Operations in the 5.15-5.25GHz band are restricted to indoor usage only. FCC regulations restrict the frequency 5850-5895MHz operation of this device to indoor use only.

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

§ 15.407(d)(2) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This module is intended for OEM integrators only. Per FCC KDB 996369 D03 OEM Manual v01 guidance, the following conditions must be strictly followed when using this certified module:

KDB 996369 D03 OEM Manual v01 rule sections:**List of applicable FCC rules**

This module has been tested for compliance to FCC Part 15

Summarize the specific operational use conditions

The module is tested for standalone mobile RF exposure use condition. Any other usage conditions such as co-

location with other transmitter(s) or being used in a portable condition will need a separate reassessment through a class II permissive change application or new certification.

Limited module procedures

Not applicable.

Trace antenna designs

Not applicable.

RF exposure considerations

This equipment complies with FCC mobile radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. If the module is installed in a portable host, a separate SAR evaluation is required to confirm compliance with relevant FCC portable RF exposure rules.

Antennas

The following antennas have been certified for use with this module; antennas of the same type with equal or lower gain may also be used with this module. The antenna must be installed such that 20 cm can be maintained between the antenna and users.

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)		
				WLAN 2.4GHz	WLAN 5GHz 6GHz	Bluetooth
1	ARISTOTLE	RFA-27-JP378-4B-200	Monopole	3.38	4.86	3.38
2	ARISTOTLE	RFA-27-JP326-MHF4300	PIFA	3.50	5.00	3.50
3	ARISTOTLE	RFA-27-C38H1-MHF4300	Dipole	3.00	5.00	3.00
4	ARISTOTLE	RFA-57-JP697-4B-300	Monopole	—	-5.00	—

Label and compliance information

The final end product must be labeled in a visible area with the following:

“**Contains FCC ID: TX2-RTL8852CE**”. The grantee’s FCC ID can be used only when all FCC compliance requirements are met.

Information on test modes and additional testing requirements

This transmitter is tested in a standalone mobile RF exposure condition and any co-located or simultaneous transmission with other transmitter(s) or portable use will require a separate class II permissive change re-evaluation or new certification.

Additional testing, Part 15 Subpart B disclaimer

This transmitter module is tested as a subsystem and its certification does not cover the FCC Part 15 Subpart B (unintentional radiator) rule requirement applicable to the final host. The final host will still need to be reassessed for compliance to this portion of rule requirements if applicable. As long as all conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-

evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

OEM/Host manufacturer responsibilities

OEM/Host manufacturers are ultimately responsible for the compliance of the Host and Module. The final product must be reassessed against all the essential requirements of the FCC rule such as FCC Part 15 Subpart B before it can be placed on the US market. This includes reassessing the transmitter module for compliance with the Radio and EMF essential requirements of the FCC rules. This module must not be incorporated into any other device or system without retesting for compliance as multi-radio and combined equipment.

RF Exposure Information (SAR)

This device has been tested at 5 mm separation distance and meets applicable limits for Radio Frequency (RF) exposure. To ensure RF exposure compliance, the antenna(s) used with the device must be installed in host platforms providing a minimum separation distance 5 mm from the users. Any separation distances less than 5mm will require additional evaluation and FCC/ISED authorization.

Industry Canada statement:

This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with greater than 20cm between the radiator & your body.

This device is intended only for OEM integrators under the following conditions: (For module device use)

1. The antenna must be installed and operated with greater than 20cm between the antenna and users, and
2. The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed and operated with greater than 20cm between the antenna and users. The final end product must be labeled in a visible area with the following: **"Contains IC: 6317A-RTL8852CE"**.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Caution :

1. the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
2. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
3. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate;
4. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

This radio transmitter **[IC: 6317A-RTL8852CE]** has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)		
				WLAN 2.4 GHz	WLAN 5G Hz /6GHz	Bluetooth
1	ARISTOTLE	RFA-27-JP378-4B-200	Monopole	3.38	4.86	3.38
2	ARISTOTLE	RFA-27-JP326-MH4300	PIFA	3.50	5.00	3.50
3	ARISTOTLE	RFA-27-C38H1-MH4300	Dipole	3.00	5.00	3.00

NCC Statement

Low-power radio frequency equipment that has obtained certification must not be changed without approval by the company, firm or user.

Change the frequency, increase the power, or change the features and functions of the original design.


The use of low-power radio frequency equipment shall not affect flight safety or interfere with legitimate communications; if interference is found

When the problem occurs, it should be stopped immediately and improved until there is no interference before continued use. The aforementioned legal communications refer to communications regulated by telecommunications

Radio communications for operations regulated by laws and regulations. Low power RF equipment must tolerate legal communications or industrial, scientific and medical

Interference from medical electromagnetic radiation radiating electrical equipment.

1. When using this product, avoid affecting the operation of nearby radar systems.
 2. High-gain directional antennas can only be used in fixed point-to-point systems. (The antenna cannot be connected or replaced material, no marking required).
-
1. After this module obtains certification, an inspection qualification label will be marked on the module body in accordance with regulations.

2. The system manufacturer should mark the words “This product contains a radio frequency module:  XXXyyyLPDzzzz-x” on the platform Sample. The outer packaging of the system manufacturer must be marked with the NCC LOGO

Japan Statement

Host system must be labeled with “**Contains MIC ID:xxxxxx**”, MIC ID displayed on label.

CE/UK Statement

This equipment complies with EU radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. The frequency and the maximum transmitted power in EU are listed below:

2412-2472MHz: ≤ 20 dBm

2402-2480MHz (BR/EDR): ≤ 15.90 dBm

2402-2480MHz (LE): ≤ 13.15 dBm

5180-5240MHz: ≤ 23 dBm

5260-5320MHz: ≤ 23 dBm


5500-5700: ≤ 23 dBm

5745-5825MHz: ≤ 13.98 dBm (For CE only)

5745-5825MHz: ≤ 23 dBm (For UK only)

5955-6415MHz: ≤ 23 dBm

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range.

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK(NI)

Norway(NO), Iceland(IS), Lichtenstein(LI), Turkey(TR), Switzerland(CH)

Installing the Wireless PCIe NGFF2230 module

Hardware

Installing PCIe NGFF2230 module to PCIe NGFF2230 connector and connect two external Wi-Fi antennas on I-PEX connectors.



Un-installing the Wireless PCIe NGFF2230 module

Hardware

Remove 2 external Wi-Fi Antennas from the Wireless PCIe NGFF2230 module board and remove the Wireless PCIe NGFF2230 module board from PCIe NGFF2230 connector port



Installing the WLAN PCIe & Bluetooth USB NGFF2230

module Software

Before you proceed with the installation, please notice following descriptions.


Note1: The following installation was operated under Windows 7.

Note2: If you have installed the WLAN driver & utility before, please uninstall the old version first.

A. Execute the “**setup.exe**”, Click “**Next**” to process the installation



B. Select "I accept the terms in license agreement" and click "Next" to process the installation

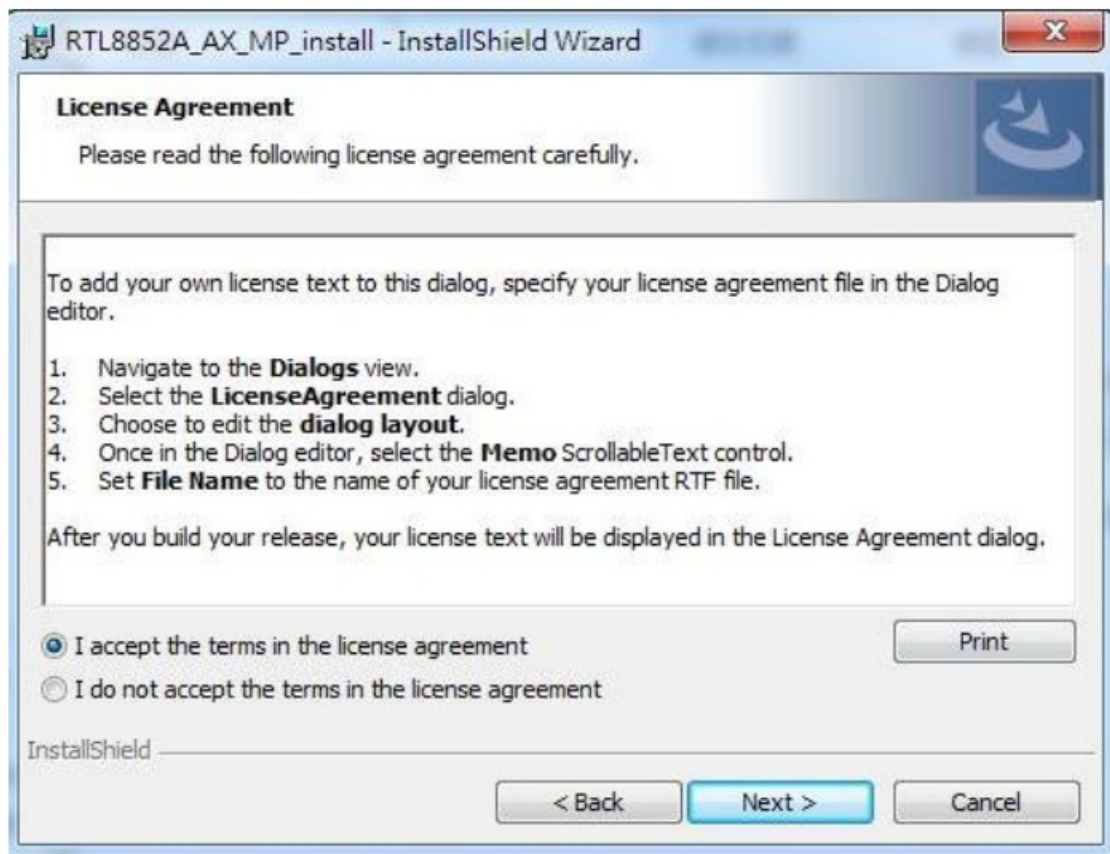

C. Click "Next" button.

RTL8852A_AX_MP_install - InstallShield Wizard

Customer Information

Please enter your information.

User Name:
Lenous Two

Organization:

InstallShield

< Back Next > Cancel

D. Select “**Complete**” and click “**Next**” button.

RTL8852A_AX_MP_install - InstallShield Wizard

Setup Type

Choose the setup type that best suits your needs.

Please select a setup type.


☒ **Complete**
All program features will be installed. (Requires the most disk space.)

☐ **Custom**
Choose which program features you want installed and where they will be installed. Recommended for advanced users.

InstallShield

< Back Next > Cancel


E. Click “**Install**” button

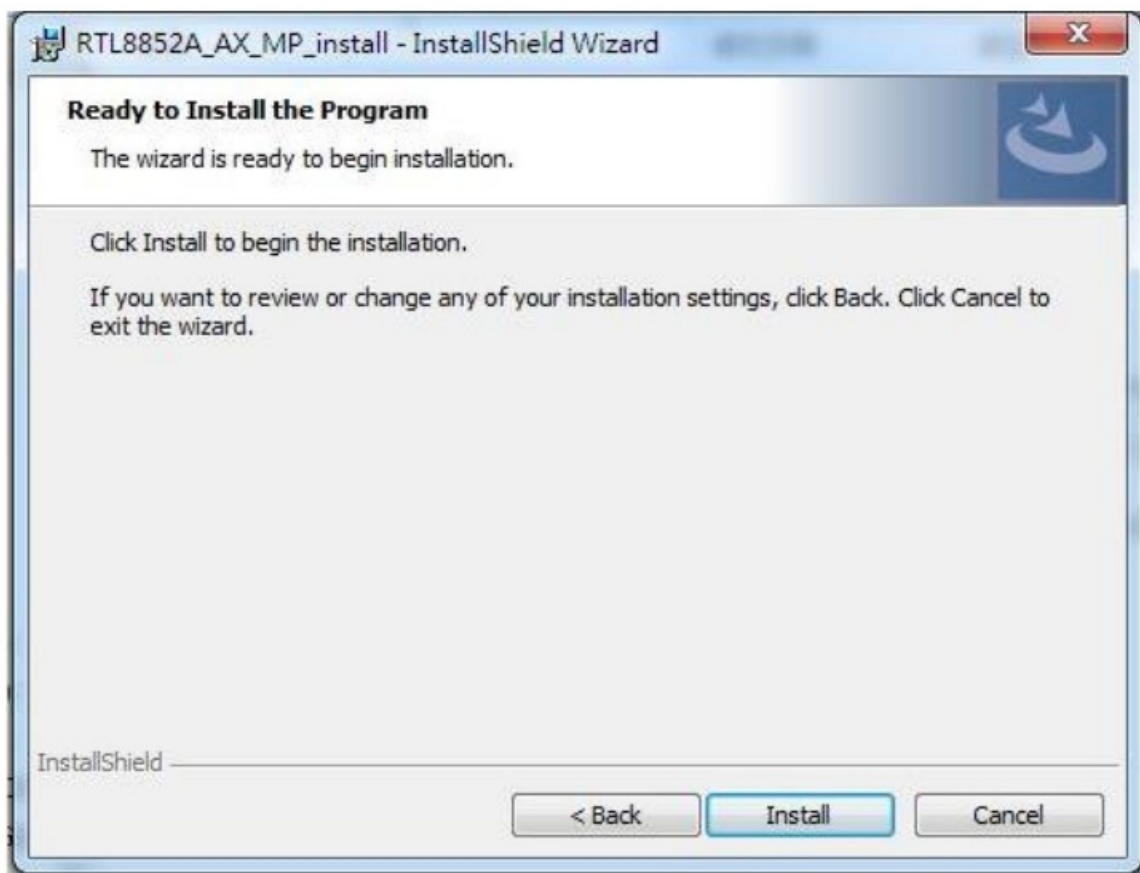


F. Click **“Finish”** button.



G. Please click “ ” to continue.

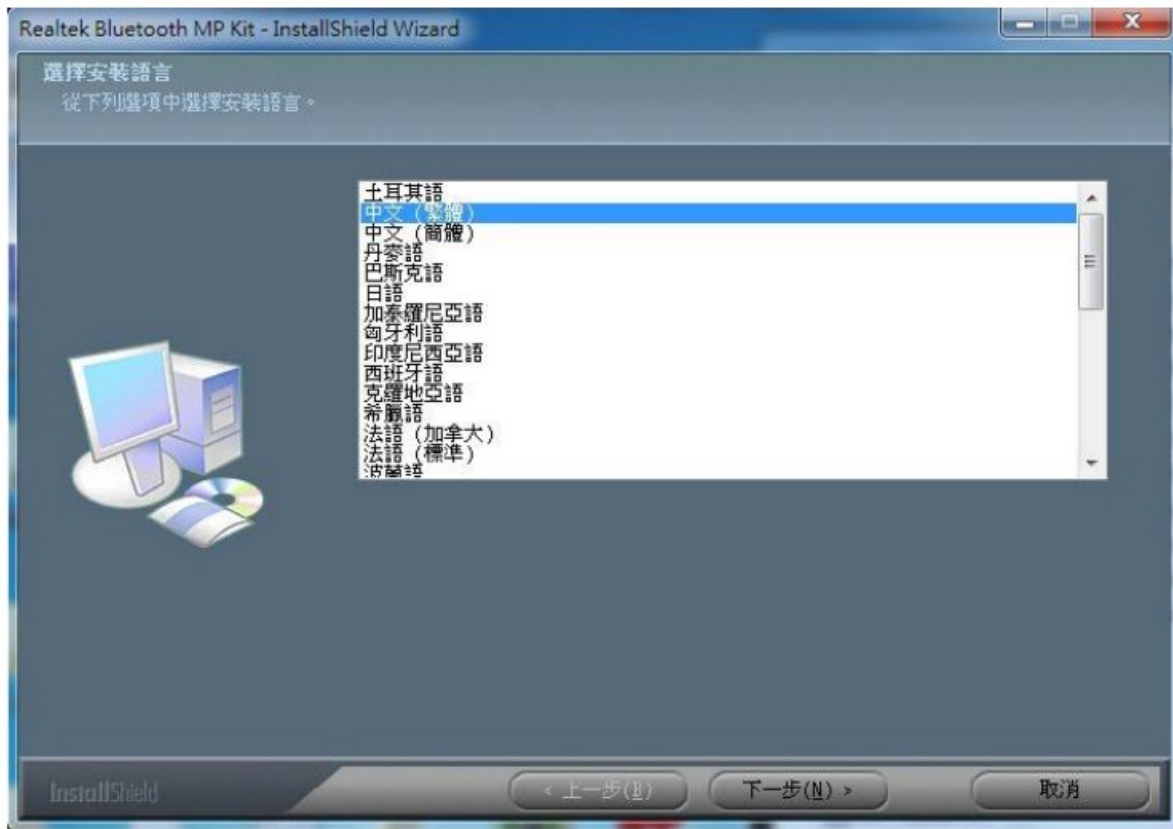


H. Please click “ ” to continue.”

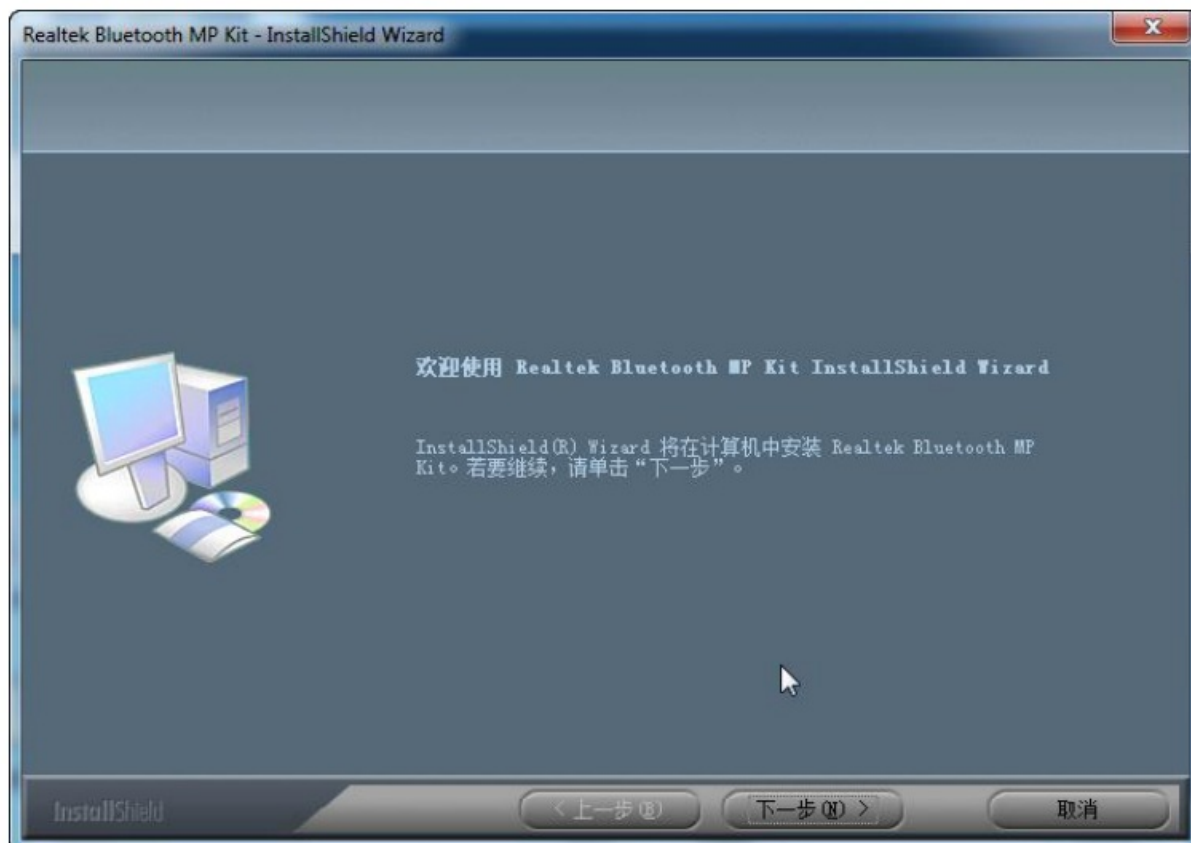

I. Please click “ ” to start installation.



J. Please click “ ”to finish the installation.

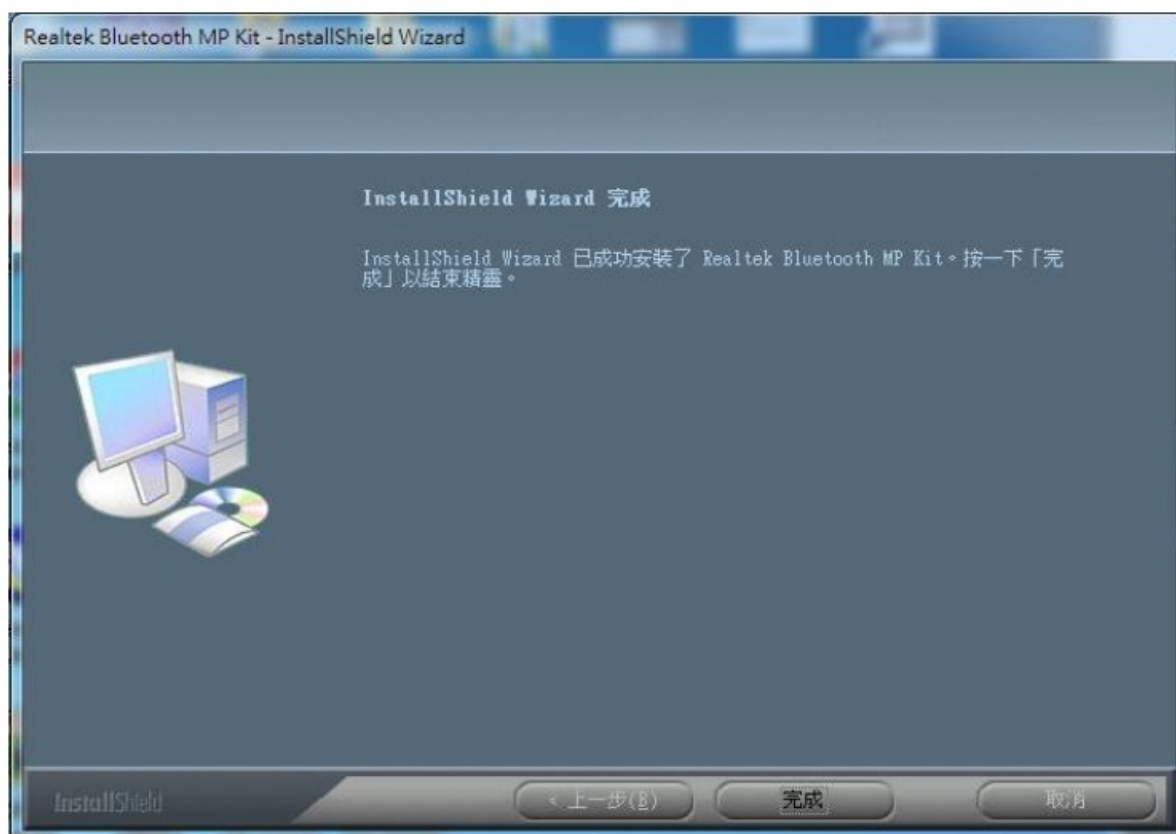


Un-installing the Wireless PCIe NGFF2230 module

Software

A. Uninstall the RTL8852CE WLAN Driver from “**Start**”→ “**Control Panel**”→ “**Programs**”

Please select items as below and click “**Uninstall**” to remove RTL8852CE WLAN, BT driver and MP UI.

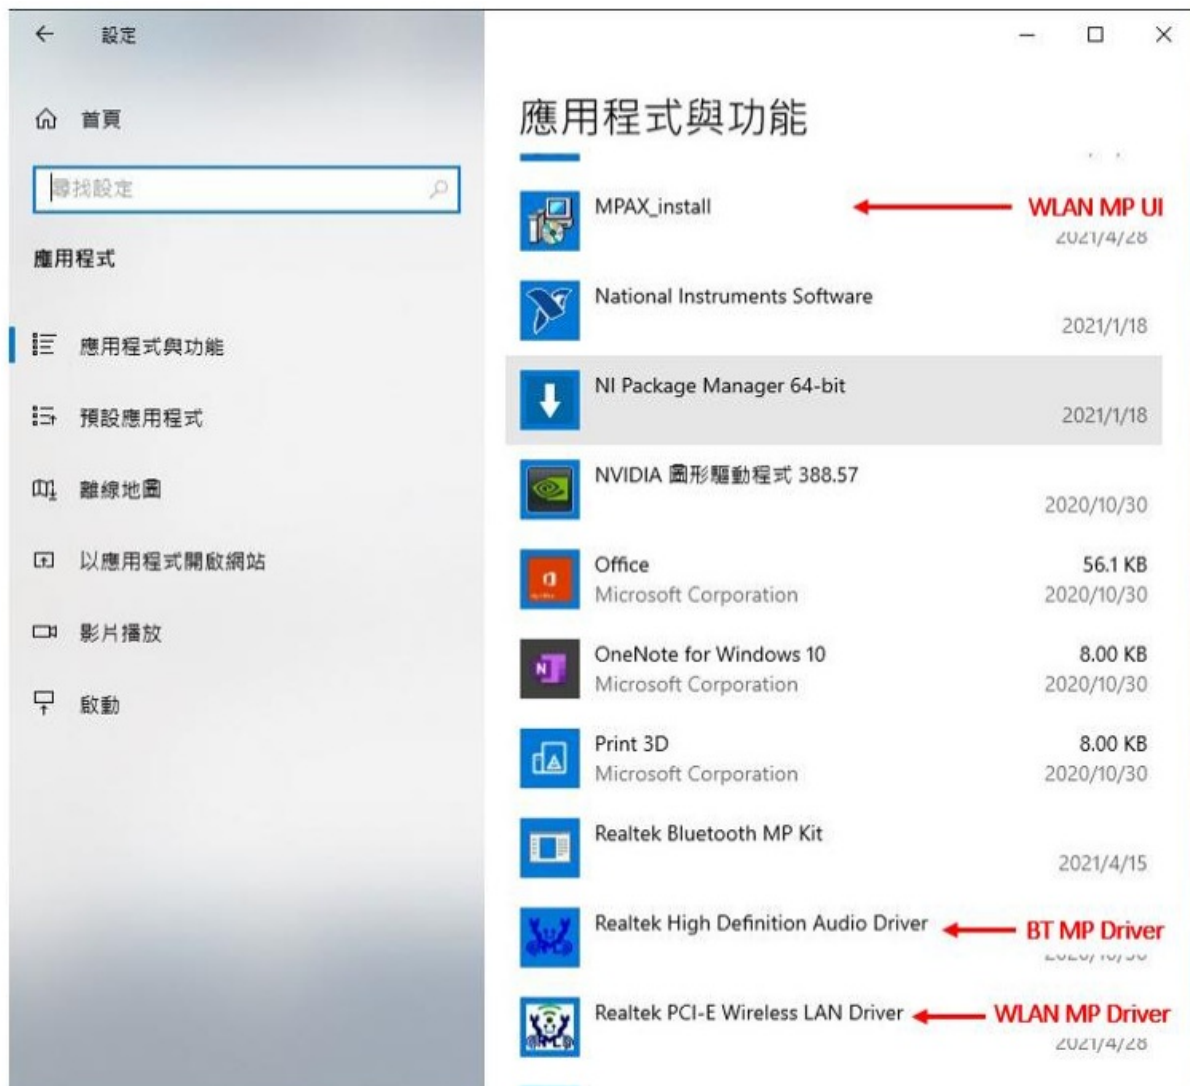

CUSTOMER SUPPORT

Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan


Tel.: +886-3-578-0211.

Fax: +886-3-577-6047

www.realtek.com



Documents / Resources

	<p>REALTEK RTL8852CE Combo Module [pdf] User Manual RTL8852CE, RTL8852CE Combo Module, Combo Module, Module</p>
---	---

References

-  - [Wi-Fi](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.