



**FLEXCOLOR &  
FLEXWATT SWITCH  
ON EACH UNIT**  
↓

## RemPhos BASE RP-B-LS-G2-2FT-25W-40K-WC Linear Strip Fixture Owner's Manual

[Home](#) » [RemPhos BASE](#) » RemPhos BASE RP-B-LS-G2-2FT-25W-40K-WC Linear Strip Fixture Owner's Manual



### Contents

- [1 RemPhos BASE RP-B-LS-G2-2FT-25W-40K-WC Linear Strip Fixture](#)
- [2 LINEAR STRIP FIXTURE](#)
- [3 DIMENSIONS + SENSOR OPTIONS](#)
- [4 PART NUMBER BUILDER](#)
- [5 CONTROL OPTIONS \(INTERNAL\)](#)
- [6 ACCESSORIES](#)
- [7 Specifications](#)
- [8 Frequently Asked Questions \(FAQ\)](#)
  - [8.1 Q: Can I adjust the color temperature and brightness of the linear strip fixture?](#)
  - [8.2 Q: What type of controls are available for the fixture?](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)

**RemPhos BASE RP-B-LS-G2-2FT-25W-40K-WC Linear Strip Fixture**



**FLEXCOLOR &  
FLEXWATT SWITCH  
on each unit**



## OWNER'S MANUAL

### LINEAR STRIP FIXTURE

- Daisy-chain multiple fixtures together.
- OCC option comes w/ an integrated microwave sensor.
- Two installation options: suspended & surface mounted.
- Link up to 10 units together @ 120VAC or 24 units @ 277VAC.  
(figures are based on kits offered by Light Efficient Design, linking qtys may vary)
- SUPERflex allows for a reduction in stocked skus.
- Great for schools, hospitals, grocery stores, offices & warehouses.
- Rated for damp environments.

**SUPERflex** SWITCH BETWEEN  
3 WATTS & 3 COLOR TEMPS


**flexCONTROL** ORDER W/ ADVANCED BLUETOOTH.  
BASIC OR NO CONTROLS



PART #	UPC	DESCRIPTION	LUMENS	FLEXWATT	FLEXCOLOR
RP-B-LS-G2-2FT-25W-40K-WC	844006087746	2FT LINEAR STRIP WITH WATTAGE & CCT SELECT	1950-3250	15W/20W/ <b>25W</b>	3000K/ <b>4000K</b> /5000K
RP-B-LS-G2-4FT-30W-40K-WC	844006089160	4FT LINEAR STRIP WITH WATTAGE & CCT SELECT	3250-5200	20W/ <b>30W</b> /40W	3000K/ <b>4000K</b> /5000K

LUMENS/WATTAGES/COLOR TEMPS IN BOLD ARE DEFAULT SETTING



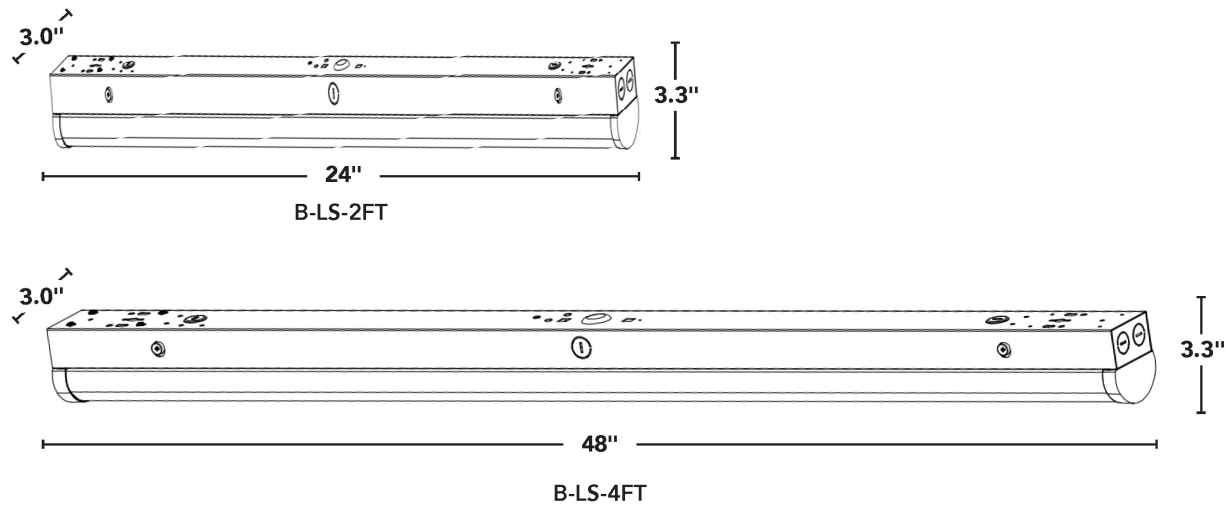

DIMENSIONS + SENSOR OPTIONS






PART NUMBER BUILDER

MFR	PRODUCT	LENGTH (FT)	WATTAGE	COLOR	FUNCTION	SENSOR	EMG
RP	B-LS				WC		
		2F	15W 20W (2ft) (4ft)	30K = 3000K	WC = WATTAGE + COLOR SELECTABLE	OCC = MIC MOTION SENSOR	EMG = EMG BATTERY BACKUP
		4F	20W 30W (2ft) (4ft)	40K = 4000K		OCCRF = MIC GROUPABLE MOTION SENSOR	
			25W 40W (2ft) (4ft)	50K = 5000K		OCBT = MIC MOTION SENSOR  BT = BLUETOOTH LOW ENERGY CONTROL NODE	
EXAMPLE PART NUMBER							
RP-B-LS-G2-4FT-30W-40K-WC							

CONTROL OPTIONS (INTERNAL)

-OCC	-OCCRF	-OCBT	-BT
 STANDARD MICROWAVE MOTION SENSOR IR12 REMOTE	 SIMPLE GROUPING MICROWAVE GROUPABLE MOTION SENSOR IR13 REMOTE	 MICROWAVE MOTION SENSOR W/ LOW ENERGY NETWORK LIGHTING CONTROL IR12 REMOTE & SILVAIR APP	 LOW ENERGY NETWORK CONTROL NODE SILVAIR APP

ACCESSORIES

PART #	UPC	DESCRIPTION	
CONTINUOUS RUN SURFACE/CEILING MOUNTING KIT			
RP-B-LS-G2-CR-SM	844006091088	USE TO CREATE STRONG AND STRAIGHT JUNCTIONS BETWEEN TWO SURFACE/CEILING MOUNTED FIXTURES. <b>INCLUDES</b> IN-LINE BRACKET, AC WIRING, WIRE NUTS	
CONTINUOUS RUN SUSPENSION MOUNTING KIT			
RP-B-LS-G2-CR-SPND	844006061463	USE TO CREATE STRONG AND STRAIGHT JUNCTIONS BETWEEN TWO SUSPENDED FIXTURES. <b>INCLUDES</b> 4FT AIRCRAFT CABLE (2X), CEILING ANCHORS, IN-LINE BRACKET, AC WIRING, WIRE NUTS.	
SINGLE FIXTURE SUSPENSION KIT			
RP-B-LS-G2-SUSPENDED KIT-SINGLE-2FT/4FT	844006061418	USE TO SUSPEND ONE FIXTURE FROM THE CEILING. <b>INCLUDES</b> 4FT AIRCRAFT CABLE (2X), CEILING ANCHORS.	

## Specifications

- Product: Linear Strip Fixture
- FlexCOLOR & flexwatt switch on each unit
- Switch between 3 watts & 3 color temps
- Order with advanced Bluetooth, basic, or no controls
- Operates on 208V & 240V
- DIM to OFF feature
- Sensor ready 12V AUX
- Beam Angle: OCC
- Optional EMG battery backup
- 80+ CRI
- L70 rated for 50,000hrs life
- Lumens: 1950-3250 (2ft), 3250-5200 (4ft)
- Wattages: 15W/20W/25W (2ft), 20W/30W/40W (4ft)
- Color Temps: 3000K/4000K/5000K

## CORPORATE HEADQUARTERS

Cary, IL |  
 INNOVATION & MANUFACTURING CENTER  
 Middleton, MA  
 847.380.3540  
[led-llc.com](http://led-llc.com)  
[sales@led-llc.com](mailto:sales@led-llc.com)

## Frequently Asked Questions (FAQ)


**Q: Can I adjust the color temperature and brightness of the linear strip fixture?**

A: Yes, you can switch between different color temperatures and wattages using the flexCOLOR & flexwatt switch on each unit.

**Q: What type of controls are available for the fixture?**

A: You can order the fixture with advanced Bluetooth controls, basic controls, or without any controls.

## Documents / Resources

	<p><a href="#">RemPhos BASE RP-B-LS-G2-2FT-25W-40K-WC Linear Strip Fixture</a> [pdf] Owner's Manual RP-B-LS-G2-2FT-25W-40K-WC, RP-B-LS-G2-2FT-25W-40K-WC Linear Strip Fixture, Linear Strip Fixture, Strip Fixture, Fixture</p>
---	---

## References

- [User Manual](#)

### Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.