



Reolink Track Mix PoE PTZ Camera with Dual Tracking Instruction Manual

[Home](#) » [reolink](#) » Reolink Track Mix PoE PTZ Camera with Dual Tracking Instruction Manual 

Contents

- 1 Reolink Track Mix PoE PTZ Camera with Dual Tracking Instruction Manual
- 2 What's in the Box
- 3 Camera Introduction
- 4 Connection Diagram
- 5 Set UP the Camera
- 6 • On Smartphone
- 7 NOTE:
- 8 Mount the Camera
- 9 Installation Tips
- 10 Mount the camera to the wall
- 11 Mount the camera to the wall
- 12 Mount the Camera to Ceiling
- 13 Troubleshooting
- 14 Camera is not powering on
 - 14.1 Picture is not clear
 - 14.2 Specification
 - 14.3 Hardware Features
 - 14.3.1 General
 - 14.3.2 Notification of Compliance
 - 14.4 Declaration of Conformity
 - 14.4.1 UKCA Declaration of Conformity
 - 14.4.2 FCC Compliance Statements
 - 14.5 ISED Compliance Statements
 - 14.6 Limited Warranty
 - 14.7 Terms and Privacy
 - 14.8 Correct Disposal of This Product
 - 14.8.1 Read More About This Manual & Download PDF:
 - 14.9 Documents / Resources
 - 14.9.1 References

Reolink Track Mix PoE PTZ Camera with Dual Tracking Instruction Manual



What's in the Box




Camera



Waterproof Lid



1m
Ethernet Cable



Mounting Hole
Template



Surveillance Sign





Quick Start Guide



Pack of Screws

Camera Introduction

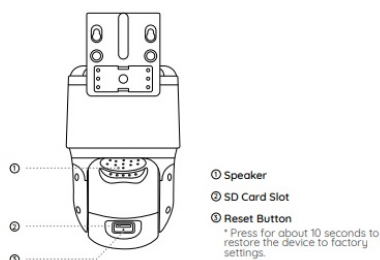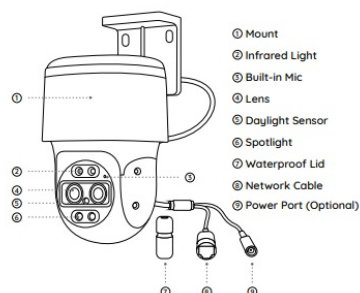


Connection Diagram

Before using the camera, please connect your camera as instructed below to finish initial setup.

1. Connect the camera to a Reolink NVR (not included) with an Ethernet cable.
2. Connect the NVR to your router, and then power on the

NOTE: The camera should be powered with a 12V DC adapter or a PoE powering device such as PoE injector, PoE switch or Reolink NVR (not included in the package).

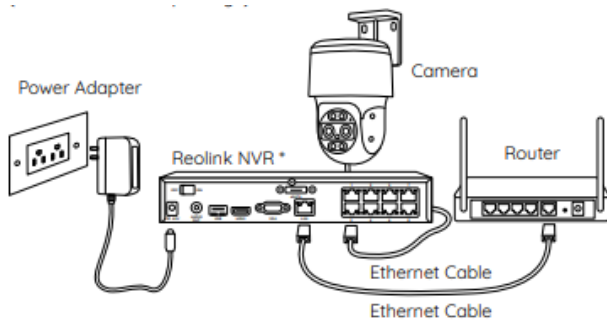

* You may also connect the camera to a PoE switch or PoE injector.

Set UP the Camera

Download and launch the Reolink App or Client software, and follow the onscreen instructions to finish initial setup.



• On Smartphone

Scan to download the Reolink App.

NOTE:

If you are connecting the PoE camera to a Reolink PoE NVR, please set up the camera via the NVR interface

Mount the Camera

Installation Tips

- Do not face the camera towards any light
- Do not point the camera towards a glass Otherwise, it may result in poor image quality because of the window glare caused by infrared LEDs, ambient lights or status lights.
- Do not place the camera in a shaded area and point it towards a well-lit Otherwise, it may result in poor image quality. To ensure best image quality, the lighting condition for both the camera and the capture object should be the same.
- Make sure the power ports are not directly exposed to water or moisture and not blocked by dirt or other elements.
- The waterproof camera can work properly under conditions like rain and However, it doesn't mean the camera can work underwater.

- Do not install the camera at places where rain and snow can hit the lens directly


Mount the camera to the wall

Drill holes in accordance with the mounting hole template.


2. Install the mount base with screws included in the package.
3. To adjust the camera direction, you may control the camera to pan and tilt via Reolink App or Client.

NOTE: Use the drywall anchors included in the package if needed.

Mount the camera to the wall

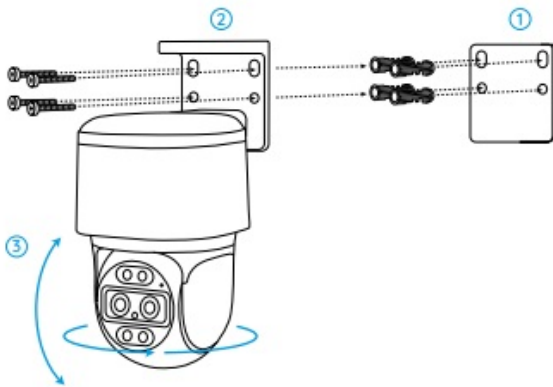

Mount the Camera to Ceiling

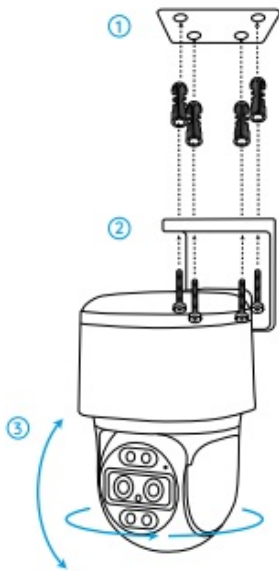

1. Drill holes in accordance with the mounting hole template.
2. Install the mount base with screws included in the package.
3. To adjust the camera direction, you may control the camera to pan and tilt via Reolink App or Client.

NOTE: Use the drywall anchors included in the package if needed

Troubleshooting

Camera is not powering on

If your camera is not powering on, please try the following solutions:

- Make sure your camera is powered on The PoE camera should be powered by a PoE switch/injector, a Reolink NVR or a 12V power adapter.
- If the camera is connected to a PoE device as listed above, connect it to another PoE port and check again.
- Try again with another Ethernet

If the problem is not solved, please contact Reolink Support.

Picture is not clear

If the picture from the camera is not clear, please try the following solutions:

- Check the camera lens for dirt, dust or
- Point the camera to a well-lit The lighting condition will affect the picture quality a lot.
- Upgrade the firmware of your camera to the latest
- Restore the camera to factory settings and check it

If the problem is not solved, please contact Reolink Support.

Specification

Hardware Features

Infrared Night Vision: Up to 30 meters (95ft) Day/Night Mode: Auto switchover
Field of View: Horizontal 104°-38°; Vertical: 60°-21°

General

Dimension: 228.2*147*110mm Weight: 1.21KG
Operating Temperature: -10°C~+55°C (14°F~131°F) Operating Humidity: 10%~90%

Notification of Compliance

Declaration of Conformity

Reolink declares that this device is in compliance with the essential requirements and other relevant provisions of EMC Directive 2014/30/EU and LVD 2014/35/EU.

UKCA Declaration of Conformity

Reolink declares that this product is in compliance with Electromagnetic Compatibility Regulations 2016 and Electrical Equipment Safety Regulations 2016.

FCC Compliance Statements

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving
- Increase the separation between the equipment and
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

ISED Compliance Statements

This Class B digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Limited Warranty

This product comes with a 2-year limited warranty that is valid only if purchased from Reolink Official Store or a Reolink authorized reseller.

Terms and Privacy


Use of the product is subject to your agreement to the Terms of Service and Privacy Policy Keep out of reach of children.

Correct Disposal of This Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.

Read More About This Manual & Download PDF:

Documents / Resources

	REOLINK Reolink Track Mix PoE PTZ Camera with Dual Tracking [pdf] Instruction Manual Reolink Track Mix PoE PTZ Camera with Dual Tracking, Reolink, Track Mix PoE PTZ Camera with Dual Tracking, PoE PTZ Camera with Dual Tracking, Camera with Dual Tracking, Dual Tracking, Tracking
---	---

References

- [ce.com](#)
- [User Manual](#)