

RETEKESS T111 Queue Wireless Calling System User Manual

Home » RETEKESS » RETEKESS T111 Queue Wireless Calling System User Manual



Retekess

Queue Wireless Calling System User Manual T111/T112



Wireless calling system

Contents

- 1 Summary
- 2 Features
- 3 Technical data
- 4 Diagram of call button keypad
- 5 Diagram of receiver
- 6 Button function
- 7 Operation instruction
- 8 Pairing method
- 9 Change number paper
- 10 Charge the receiver
- **11 FAQ**
- 12 Packing List
- 13 Warning
- **14 Local Government Regulations**
- 15 FCC ID
- **16 NOTE**
- 17 Warning
- **18 IC ID**
- 19 Avoid Choking Hazard
- 20 Protect your hearing
- 21 Turn off your radio power in the following

conditions:

- 22 Warning
 - 22.1 Avoid Burns
- 23 Safety Operation
- 24 Documents / Resources
- **25 Related Posts**

Summary

Thanks for choosing the queue wireless calling system. It adopts RF wireless technology with millions of different learning codes. The system includes a 999-channel call buttons keypad and portable buzzer&vibration receivers. The call button keypad has 20 battery charging slots. Each receiver is rechargeable and labeled with a number. In standby status, it is plugged into the charging slot, while the client places an order, he(she) will be dispatched one receiver with a number, when the order is ready, press the keypad to call the number, the client will get it through the buzzer/vibration/LED indications.

The queue system greatly improves the work efficiency and avoids the client waiting in a long queue. It is widely used in fast-food restaurants, dessert shops, auto 4S shops,s or other queue occasions.

Features

- 999 channels keypad call buttons
- 20 batteries charging slots
- · Portable rechargeable vibration & buzzer receiver
- · Independent storage memory avoiding data lost
- High receive sensitivity
- · Self-testing while power on
- · Beautiful and fashionable designing

Technical data

Receiver		
Working voltage	DC3.N (rechargeable battery)	
Charging voltage	DC5V	
Working frequency	433.92MHz	
Standby current	10±5mA	
Working current	75±10mA (vibration)	
Receive sensitivity	-107±2dBm	
Battery capacity	360mAh	
Decoder	Learning code (AM)	
Dimensions	49'101'11mm	

Keypad call button		
Working voltage	DC 5V/6A (power adapter)	
Working frequency	433.92MHz	
Standby current	24±5mA	
Transmit current	100±30mA	
Encoder	Learning code (AM)	
Dimension	150*300*33mm	

Diagram of call button keypad


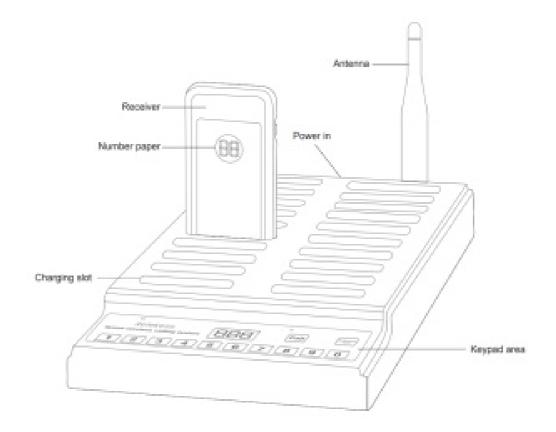



Diagram of receiver

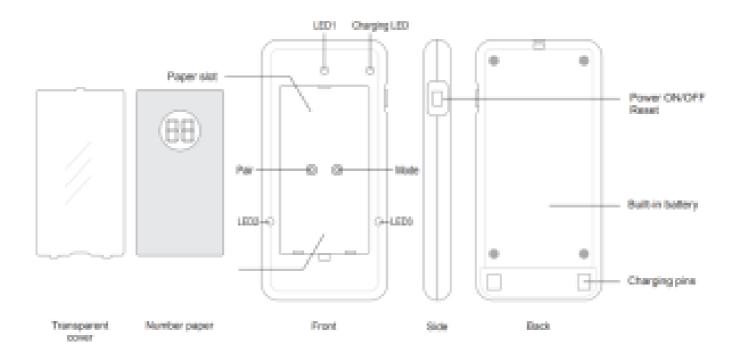

Button function

Pow er	Press and hold the button for 3sec to power on the receiver, press again to power off. Short press the button to reset standby status while there is calling.
Set	Short press the button to enter pairing status; Press and hold on to the button for 3sec to unpair.
Mod e	Change the prompt mode of the receiver. The upper position is vibration only; the lower position is vibration and buzzer.
Keyp ad	The call button & charger base has 2 different models, one is a 999-channel keypad, another one is the 20-channel keypad. The 999-channel keypad uses the combination of 0~9 to generate 999 different codes, but the 20-channel keypad only has 20 different codes.

Press the button from 0 to 9 to select a number from 1 to 999, then press the "Call" button to send. If select the wrong number, press "Backspace" to delete and select the number again.

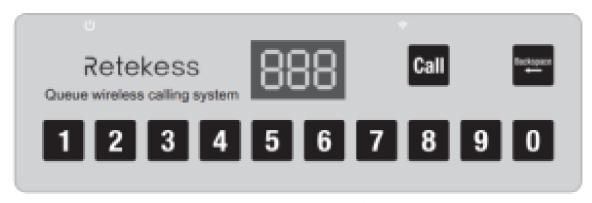

999-channel keypad

20-channel keypad, press the number button, it sends the wireless signal directly.



20-channel keypad

Note: the below instruction is based on a 999-channel keypad.

Operation instruction

- 1. Connect the call button keypad to power, it executes the self-testing procedure. Then power icon turns on.
- 2. Press and hold the "Power" button for 3s on side of the receiver to power on, the receiver will vibrate and sound 5 times, and then LED1 indicator flickers every 3s, the receiver enters standby status.
 Plug the receiver into the charging slot, it vibrates and sounds 5 times and then the blue charging LED on, the

receiver enters charging status.

- 3. When a client places an order, the service people give one receiver to him(her) and note down the number.
- 4. While the order is ready, the service people press keypad to call the client (number), the corresponding receiver gets the information and prompts vibration/buzzer/light for 5min. After that only the 3 LED indicators flicker.
 - Press the "Power/Reset" button or plug back into the charging slot to reset the charging/standby status.
- 5. The client gives back the receiver to service people, the service people put the receiver in the charging slot and provide service.
- 6. While the receiver is in charging, press the number on the keypad, the corresponding receiver LED indicators will flicker 3 times to report its position.

Note:

- 1. In daily working, the receiver can be powered on all the time. If long time no uses, power off the receiver, please.
- 2. For a long time the receiver is not used, charge it for a while before giving to the client.
- 3. The receiver must be paired to the keypad before using. About how to do pairing, please refer to the pairing method below.

Pairing method


- 1. Paring Short press the "Set" button, the LED1 indicator turns on, then press the call number on the keypad. The receiver gets the signal and the LED1 lamp turns off. The pairing is successful. If the receiver does not get any signal in 10 sec, it will quit pairing status automatically.
- 2. Deleting Press and hold on to the "Set" button for 5 sec, the LED1 indicator will be ON-OFF, then release the button, all the paired call buttons will be deleted.

Note: to do the pairing or mode settings, should take off the transparent and number paper, the settings button is covered below it.

Change number paper

Take out the transparent plexiglass cover in the front of the receiver, then put a number paper inside the paper slot. And then put back the cover.

Note: While doing the pairing operation, take out the cover and paper firstly.

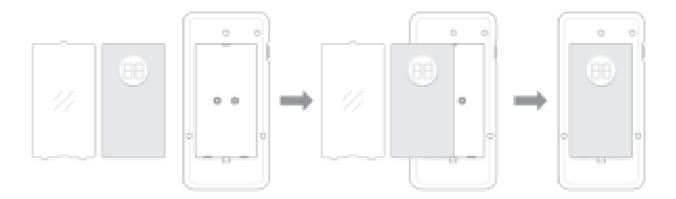

Charge the receiver

When the voltage of the receiver is lower than DC3.2V, it is low power, LED1 and blue charging LED indicator flicker with short buzzer sound, please recharge in time.

Plug the receiver into the charging slot, the blue charging LED indicator will flicker, while it is charged full, the LED indicator will turn on all the time.

FAQ

Problems	Reasons	Solutions
While power is on, the number displ ay on the keypad is not on.	The power adaptor is broken.	Change the power adaptor.
The distance of some receiver gets near.	The power of the battery is low.	Charge the battery in time.
The receiver cannot get any signal fr om the keypad call button.	The pairing is deleted; The number is not correct.	Pair the receiver again to the keypad.
Forget the number of receivers.		Delete the pairing first, then pair it again.

Packing List

Name	Quantity
Call button keypad	1 pc
Receiver	20 pcs
Power adaptor	1 pc
User manual	1 pc
Warranty card	1 pc

Warning



Before using this radio, read this guide which contains important operating instructions for saf e usage and RF energy awareness and control for compliance with applicable standards and regulations.

Local Government Regulations

When the radios are used as a consequence of employment, the Local Government Regulations requires users to be fully aware of and able to control their exposure to meet occupational requirements. Exposure awareness can be facilitated by the use of a product label directing users to specific user awareness information. Your Retekess radio has a RF Exposure Product Label. Also, your user manual or separate safety booklet includes information and operating instructions required to control your RF exposure and to satisfy compliance requirements.

Compliance with RF Exposure Standards (If appropriate, Reference to the actual product's Safety Marking)

Your Retekess radio is designed and tested to comply with a number of national and international standards and guidelines (listed below) for human exposure to radiofrequency electromagnetic energy.

FCC ID

The FCC ID means: This radio complies with the IEEE (FCC) and ICNIRP exposure limits for occupational/controlled RF exposure environments at operating duty factors of up to 50% talk-50% listen and is approved for occupational use only.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

Warning

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The CE marking means: Hereby, Henan Eshow Electronic Commerce Co., Ltd. declares that the radio equipment type is in compliance with the RED Directive 2014/53/EU and the ROHS Directive 2011/65/EU and the WEEE Directive 2012/19/EU. The full text of the EU declaration of conformity is available at the following internet address: www.tivdio.com

IC ID

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- · This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

In terms of measuring RF energy for compliance with these exposure guidelines, your radio generates measurable RF energy only while it is transmitting (during talking), not when it is receiving (listening) or in standby mode.

Avoid Choking Hazard



Small Parts. Not for children under 3 years.

Protect your hearing



- Use the lowest volume necessary to do your job.
- Turn up the volume only if you are in noisy surroundings.
- **WARNING** Turn down the volume before adding a headset or earpiece.

Turn off your radio power in the following conditions:



- Turn off your radio before removing (installing) a battery or accessory r when charging the battery.
- Turn off your radio when you are in a potentially hazardous environment: Near electrical blasting caps, in a blasting area, in explosive atmospheres (inflammable gas, dust particles, metallic powders, grain powders, etc.).
- Turn off your radio while taking on fuel or while parked at gasoline service stations.

To avoid electromagnetic interference and/or compatibility conflicts

- Turn off your radio in any facility where posted notices instruct you to do so, hospitals or health care facilities (Pacemakers, Hearing Aids and Other Medical Devices) may be using equipment that is sensitive to external RF energy.
- Turn off your radio when on board an aircraft. Any use of a radio must be in accordance with applicable regulations per airline crew instructions.

Warning

Avoid Burns

Antennas

• Do not use any portable radio that has a damaged antenna. If a damaged antenna comes into contact with the skin when the radio is in use, a minor burn can result.

Batteries (If appropriate)

When the conductive material such as jewelry, keys, or chains touch exposed terminals of the batteries, may
complete an electrical circuit (short circuit the battery) and become hot to cause bodily injury such as burns.
 Exercise care in handling any battery, particularly when placing it inside a pocket, purse, or another container
with metal objects.

Long transmission (If appropriate)

• When the transceiver is used for long transmissions, the radiator and chassis will become hot.

Safety Operation

Forbid



- Do not use charger outdoors or in moist environments, use only in dry locations/conditions.
- Do not disassemble the charger, which may result in a risk of electrical shock or fire.
- Do not operate the charger if it has been broken or damaged in any way.
- Do not place a portable radio in the area over an airbag or in the airbag deployment area. The radio may be propelled with great force and cause serious injury to occupants of the vehicle when the airbag inflates.

To reduce risk

- Pull by the plug rather than the cord when disconnecting the charger.
- Unplug the charger from the AC outlet before attempting any maintenance or cleaning.
- Contact Retekess for assistance regarding repairs and service.

EU Importer

Name Germany Retevis Technology GmbH Address Uetzenacker 29,38176 wendeburg



Henan Eshow Electronic Commerce Co., Ltd

Add: Room 722, Sanjiang Building, No.170 Nanyang Road,

Huiji District, Zhengzhou, Henan, China

Facebook: <u>facebook.com/RetekessWirelessSystem</u>

E-mail: support@retekess.com

Documents / Resources



RETEKESS T111 Queue Wireless Calling System [pdf] User Manual

T111, T112, Queue Wireless Calling System



RETEKESS T111 Queue Wireless Calling System [pdf] User Manual

T111, T112, Queue Wireless Calling System, T111 Queue Wireless Calling System, Wireless Calling System

Manuals+,