



RGLink Mini-Pro Video Switcher Instructions

[Home](#) » [RGLink](#) » RGLink Mini-Pro Video Switcher Instructions 

Contents

- 1 RGLink Mini-Pro Video Switcher Instructions
 - 1.1 Key Features
 - 1.2 Application
 - 1.3 Dimensions
 - 1.4 Order Codes
 - 1.5 Specification
- 2 Documents / Resources
 - 2.1 References
- 3 Related Posts

RGLink Mini-Pro Video Switcher Instructions




Key Features


- mini switcher convenient to carry

- Built-in LCD for video previews
- Joystick Camera Control
- T-Bar switch and 14 transition effects
- 4K HDMI inputs
- Support live streaming via USB 3.0
- Support recording via USB 2.0
- Embedded & Insert Audio with Sync
- Mix audio from multiple inputs
- Chroma Key
- Configurable PIP video overlay

Application

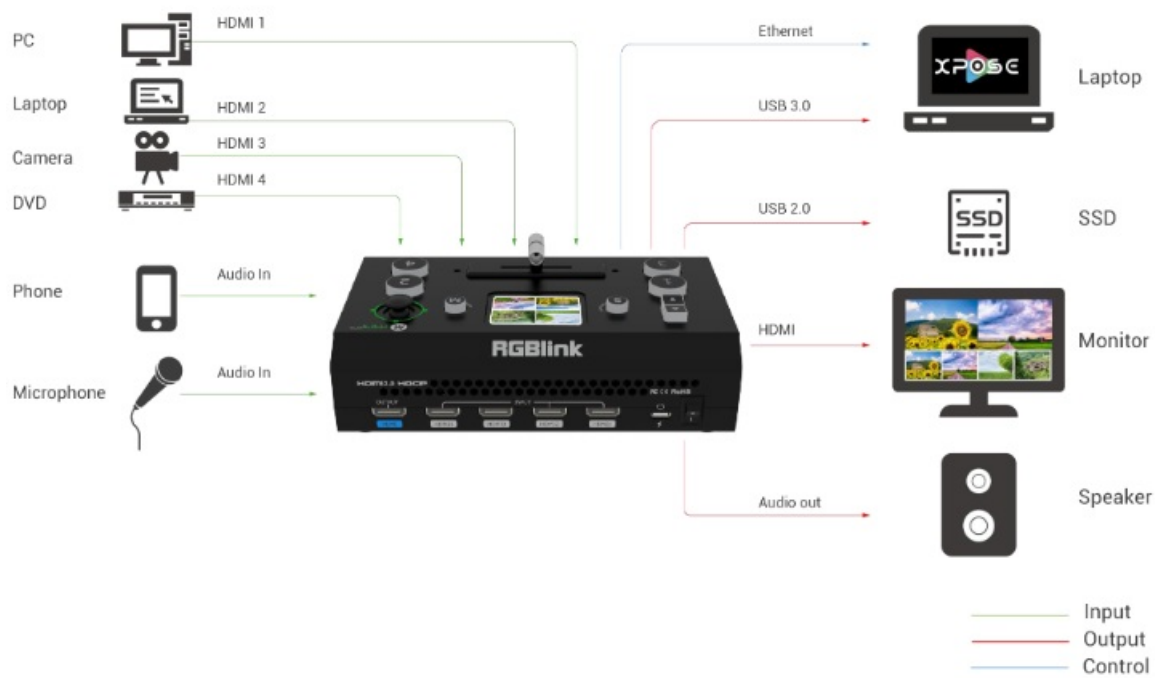

Dimensions

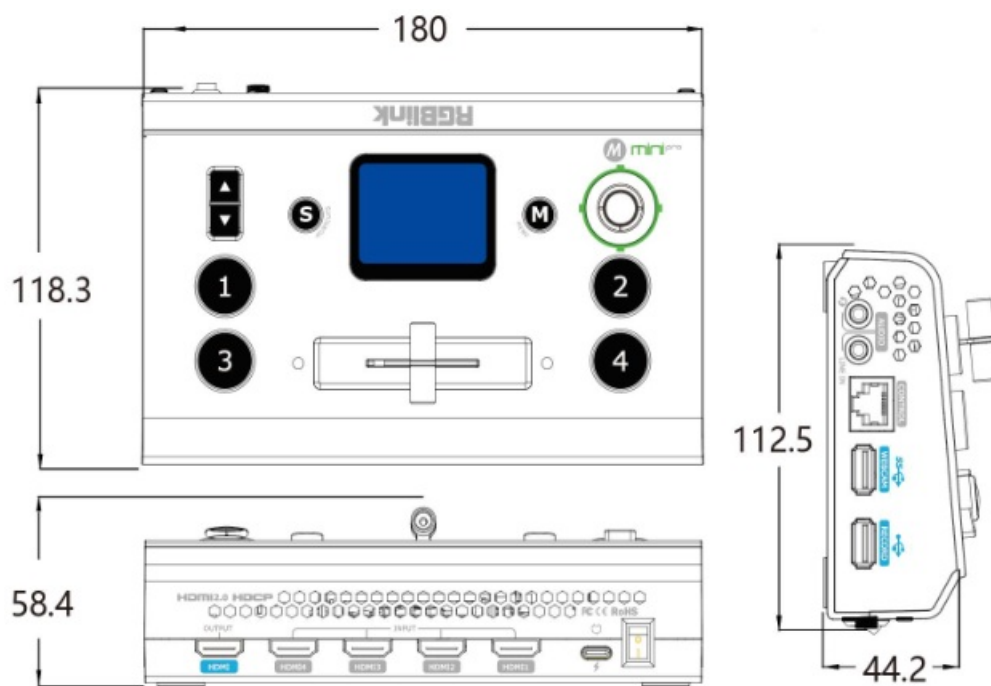

Order Codes

Product Code	Item
230-0003-02-0	mini-pro

Specification

Connectors	Input	HDMI 4K	4×HDMI-A
	Output	HDMI 2K	1×HDMI-A
		Streaming	1×USB-A
		Recording	1×USB-A
	Audio	In	2×3.5mm Stereo Jack
		Out	1×3.5mm Stereo Jack
Performance	Communication	LAN	1×RJ45
	Power		1×USB-C
	Input Resolutions	HDMI	
		SMPTE	720p@50/60 1080i@50 1080p@24/30/50/60 2160p@60
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 3840×2160@60 4096×2160@60
	Output Resolutions	HDMI	
		SMPTE	720p@50/60 1080p@24/25/30/50/60
		VESA	1024×768@60 1280×720@50/60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@24/25/30/50/60
		USB	1024×768@60 1280×720@50/60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@24/25/30/50/60
	Supported Standards	HDMI	2.0
		USB	3.0
		H.265	ITU-T H.265/ ISO/IEC 23008-2
	Supported Protocol	PTZ	VISCA
	Streaming Formats	ITU-T H.265 ISO/IEC 23008-2	
	Video	Video Formats	HDMI 2.0 HDCP 2.2
		Video Sampling	4:4:4 YUV
		Video Latency	<4 frames
	Audio	Line In Delay	up to 8 frames
		Audio Formats	LPCM/2ch/24bit/16bit/48kHz
		Color Space	RGB 8bit
	Record/Storage	Disk Formats	FAT32(≤32 GB) exFAT(64GB~2T)
		Recording Formats	MP4 WAV

Power	Input Voltage	DC 12V/1.5A (via plug pack supplied)	
	Max Power	20W	
	Compatability	USB Power Delivery (PD) 3.0	
	Supported Cables	Certified USB PD Aware	
Environment	Temperature	0℃~60℃	
	Humidity	10%~85%	
Physical	Weight	Net	0.42kg
		Package	1.20kg
	Dimension	Net	180mm×118.3mm×58.4mm
		Package	255mm×145mm×85mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Documents / Resources

	RGBlink Mini-Pro Video Switcher [pdf] Instructions Mini-Pro Video Switcher, Pro Video Switcher, Video Switcher, Switcher
---	--

References

-  [RGBlink](#)