



RGBlink TAO 1mini 2K Streaming Node Owner's Manual

[Home](#) » [RGBlink](#) » RGBlink TAO 1mini 2K Streaming Node Owner's Manual 



4K streaming node

NDI


SRT

RTMP

Contents

- [1 Device interface](#)
- [2 In the Box](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)

Device interface

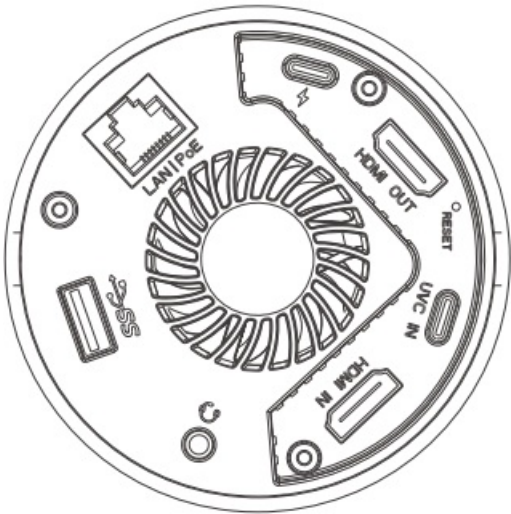

Interface

Input	HDMI 2.0 UVC	1×HDMI-A 1×USB-C
Output	HDMI 2.0	1×HDMI-A
Communication	Input	1×3.5mm audio socket
Power	LAN(PoE) USB 3.0	1×RJ45 1×USB-A
Audio	Type-C LAN(PoE)	1×PD Type-C 1×RJ45

Power

Mode	PoE, PD
Input voltage	5~12V
Maximum power	10W

Working Environment


Temperature	0 °C~55 °C
Humidity	5%~85%

Physical

Product Weight	160g
Package Weight	780g
Product Dimension	91mm(diameter)×40.8mm(height)
Package Dimension	215mm x 145mm x 80mm

In the Box

- TAO 1mini
- Welcome Card
- USB-C Cable
- International Socket Adapters

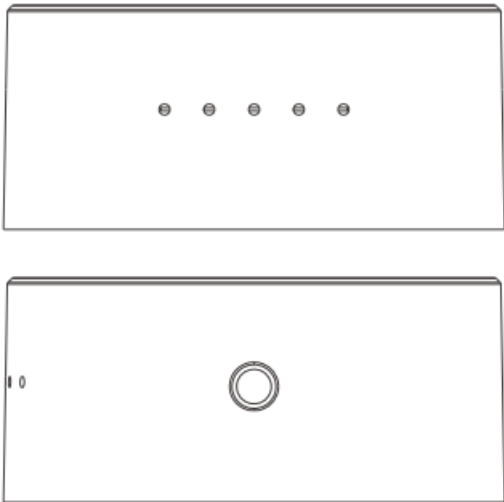

Performance

HDMI 2.0 input	
Input resolution	720p@50/60, 1080i@50/60, 1080p@30/50/60, 1280×720@50/60, 1280×768@60, 1280×1024@60, 1360×768@60, 1366×768@60 , 1600×900@60, 1920×1080@50/60 3840×2160@60
Format	RGB/YUV 4:2:0/4:2:2
Bit depth	8 bit/10 bit
Pixel format	BT.601 BT.709
Image delay	3 frames

UVC/Type C input

Input resolution	1024×768@60, 1280×720@50/60, 1280×768@60, 1280×1024@60, 1360×768@60, 1920×1080@24/25/30/50/60
Decoding performance	MJPEG/YUV H.264 H.265

Audio Input

Audio delay setting	0~160ms
Analog audio input	MIC/LINE
Maximum input level	+6dBV

LAN

Coding performance	Support MJPEG\YUV,H.264,H.265
Speed mode	CBR,VBR,FIXQP,AVBR,QPMAP
NDI coding	FULL NDI, 4K@60
NDI decoding	FULL NDI, 4K@60
RTMP/SRT coding	Support streaming software
Maximum output speed	125Mbps

HDMI 2.0 output










Output resolution	720×480@30, 1280×720@30, 1920×1080@30/60, 3840×2160@60
Audio	Embedded audio output

Order Codes

410-5513-05-1	TAO 1mini
---------------	-----------

NDI is the abbreviation of Network Device Interface, which is a broadcast-quality, low-latency open IP network interface protocol launched by New Tek. As the world's leading network audio and video codec technology, NDI is favored by more and more professional audio and video technicians.

TAO 1mini supports HDMI&UVC and FULL NDI gigabit Ethernet video stream codecs for encoding and decoding. Round appearance, simple and elegant, easy to carry, with standard camera screw holes, can be easily installed to the camera bracket. The device has a 2.1-inch TFT touch screen for real-time monitoring of signals and menu operations. Support tally lights, support U disk recording, support PoE and other functions.

 Compact in form	 low latency	 power via PoE	 LED TALLY indicators
NDI® codec support	 live previews & recording	 power from USB-C PD	UHD Up to 4K UHD without compromise
 Dual 1/4in mouse ports	 RTMP\RTMPS protocols	 Stream to at least 4 platforms via TAO APP	


Why choose NDI?

NDI® is a broadcast-quality, low-latency video streaming protocol over Gigabit networks. With low loss, low latency, more stable



NDI® & NDI/HX Codec integration

TAO 1mini not only supports 4K Full NDI but also NDI|HX, it is an all-in-one codec machine

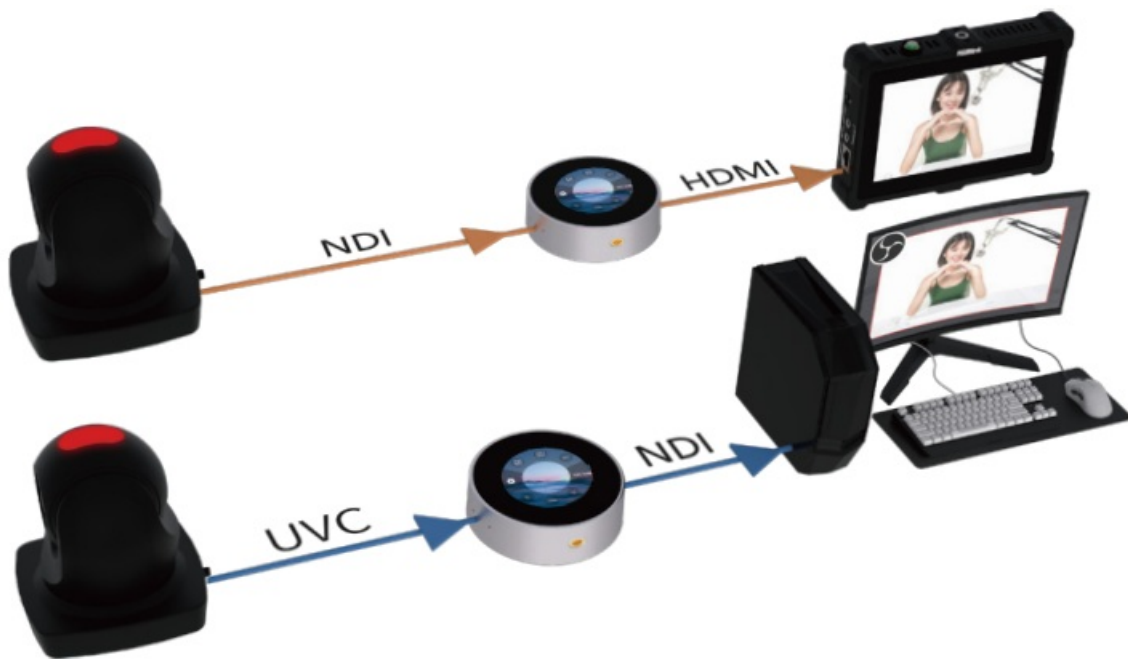

Professional IP production equipment

Both encoding and decoding support up to 4K (UHD) video resolution, and are backward compatible with resolutions such as HD/SD. Adopt MJPEG\YUV, H.264 to ensure high quality video transmission



Multi-platform live streaming

TAO 1mini can not only convert 4K HDMI\UVC signals into NDI\RTMP\SRT, but also a network push streaming device that can realize simultaneous live broadcast of 4 platforms.



Power via PoE Ethernet

At the same time, it supports Power over Ethernet (PoE), PD input, and can use a mobile power supply to power the device. Only one network cable can realize power supply and network transmission.





Easy to install

TAO 1mini has double-rack screw holes, allowing you to enjoy a variety of installation experiences according to different scenarios.

Portable and stable

Exquisite and portable, it has a built-in ultra-thin large-diameter cooling fan to help cool the device.

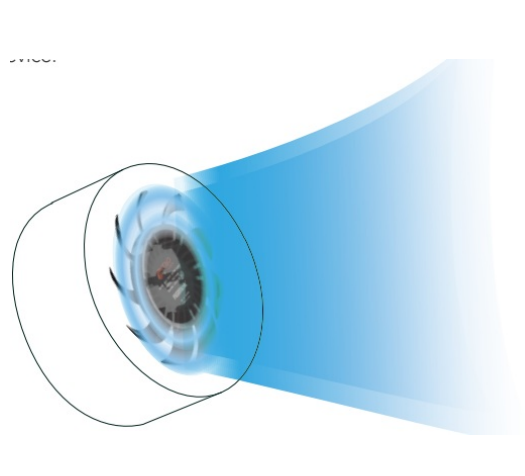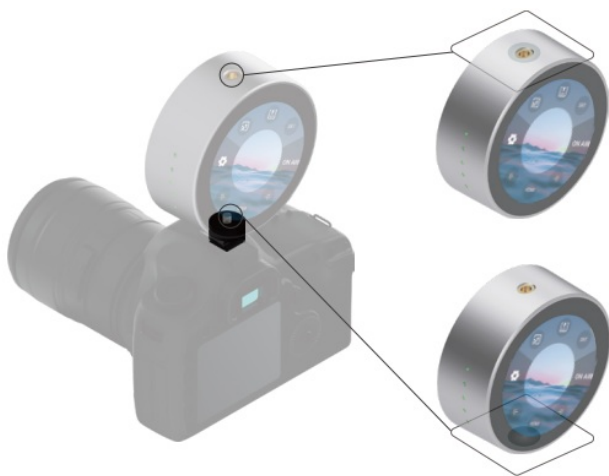

One-click recording

The USB3.0 interface supports up to 64G U disk or 2T SSD solid state drive, and realizes high-quality audio and video recording function with one key.

The 2.1-inch full-color touch monitoring screen

can not only monitor the signal in real time, but also control it quickly. Monitor and touch



RGBlink®

WEB: www.rgblink.com EMAIL: sales@rgblink.com

PHONE: +86 592 5771197

Proudly designed and manufactured in Xiamen Hi Technology Zone, China



www.rgblink.com

Documents / Resources



[RGBlink TAO 1mini 2K Streaming Node](#) [pdf] Owner's Manual

TAO 1mini 2K Streaming Node, TAO 1mini, 2K Streaming Node, Streaming Node, Node

References

-  [RGBlink](#)

[Manuals+](#)