Manuals+ — User Manuals Simplified.

RICE LAKE 68540 Profinet I/O Interface Owner's Manual

RICE LAKE 68540 Profinet I/O Interface

Contents

Standard Features

- DP intelligent device
- Standard GSD file download from product page
- 128 selectable addresses
- Auto baud rate up to 56K
- Registered with Profibus Trade Organization
- Onboard diagnostic LEDs

Specifications

Power:
5 VDC, 350 mA
Fieldbus Interface:
Pluggable screw connector
Diagnostic LEDs:
Module status and network status
Dimensions:
2.00 × 1.90 × 0.75 in
(51.8 × 48 × 19 mm)
Temperature Range:
14 °F to 158 °F (-10 °C to 70 °C)

PN 68540

Part Number/Price

Part #	Description	Est. Weight	Price
68540	Profibus DP interface kit (internal), for 720i/920i in dicators	3 lb	Consult

Options/Accessories

Part #	Description	Price
69948	Additional operating manual)	Consult

Standard Features

- CE marked and UL conformance
- Onboard diagnostic LEDs
- Control protocols

Specifications

Power:
5 VDC, 350 mA (jumper for 6 VDC)
Fieldbus Interface:
RJ-45
Diagnostic LEDs:
Link status and module status
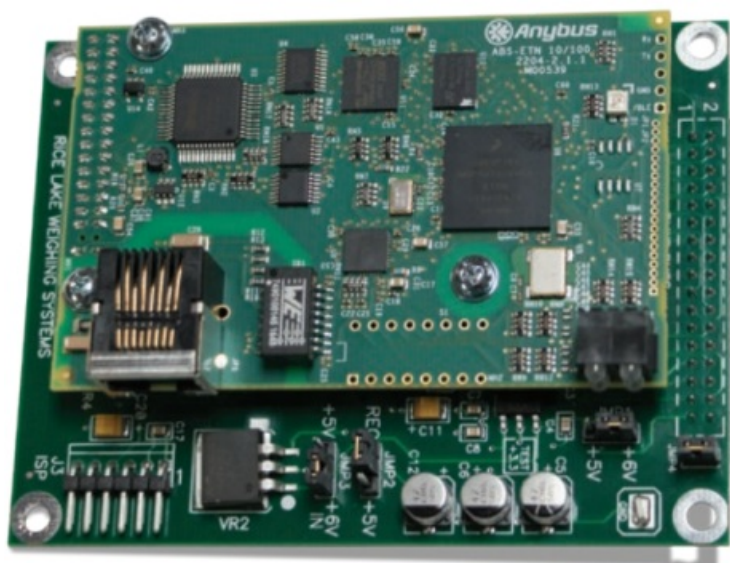**Dimensions:**
2.13 × 3.38 × 0.59 in
(86 × 54 × 15 mm)
Temperature Range:
14 °F to 158 °F (-10 °C to 70 °C)

PN 187816

Part Number/Price

Part #	Description	Price
187816	Profinet IO interface kit for 920i indicator	Consult

Options/Accessories

Part #	Description	Price
187907	Additional operating manual	Consult

Customer Support

FIELDBUS CARDS
Profinet® I/O Interface 920i®

Documents / Resources

RICE LAKE 68540 Profinet I/O Interface [pdf] Owner's Manual
68540, 187816, 68540 Profinet IO Interface, 68540, Profinet IO Interface, IO Interface, Interface

References

- **Rice Lake Weighing Systems**
- **Rice Lake Weighing Systems**
- **User Manual**