



Contents [[hide](#)]

- [1 RIDE1UP Revv1 HT Connect Plus Rear Rack and Handle](#)
- [2 Product Usage Instructions](#)
- [3 Step-by-Step Instructions](#)
- [4 Frequently Asked Questions](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)



RIDE1UP Revv1 HT Connect Plus Rear Rack and Handle



Product Specifications:

- **Compatible with:** Revv1 FS and HT
- **Material:** Steel

- **Weight Capacity:** Up to 100lbs

Product Usage Instructions

Step 1: Prepare for Installation

1. Work in a spacious area with room to move around the bike.
2. Remove the battery to prevent tipping during installation.
3. Lay out all parts and tools before starting to ensure no loose hardware is lost or misplaced.

Step 2: Remove Rear Brake Light and Frame Plug

1. Cut the zip tie securing the rear light cable.
2. Unplug the light and remove it using an 8mm wrench to remove the nuts (save the hardware).
3. Unbolt the bracket using a 3mm and 4mm Allen wrench and remove it.
4. Pull out the rear frame plug once the bracket is removed.

Step 3: Slide in the Utility Rack

1. Insert the rack into the frame, ensuring it is fully seated.
2. The frame holes should be fully visible for bolt installation.

Final Steps & Review

- Do not exceed 100lbs of total weight on the rack and panniers.
- Ensure all bolts are tightened.
- Heavy loads will affect the handling of the bike, caution should be taken when riding.
- The rack is not to be used for stunt riding.
- Periodically check the bolts to make sure they are secure.
- Ensure that straps or cargo cannot get into the rear wheel or interfere with the rear suspension.

Assembly Instructions for the Connect+ Revv 1 Rear Rack & Handle

This written guide will walk you through assembling and attaching the Connect+ Rack &

Handle for Revv1 FS and HT

Refer to the YouTube assembly video by scanning the QR code below:




Materials Needed

- Ride1Up Hex Key Set (3, 4, 5, 6)
- 8mm open-end wrench
- Wire cutters or scissors
- Zip Ties
- Utility Rack
- Grab Handle
- Side Panels
- Rear Brace
- Rear Light extension cable
- Bolts & Washers

Step-by-Step Instructions


Step 1: Prepare for Installation

1. Work in a spacious area with room to move around the bike.
2. Remove the battery to prevent tipping during installation.
3. Lay out all parts and tools before starting to ensure no loose hardware is lost or misplaced.

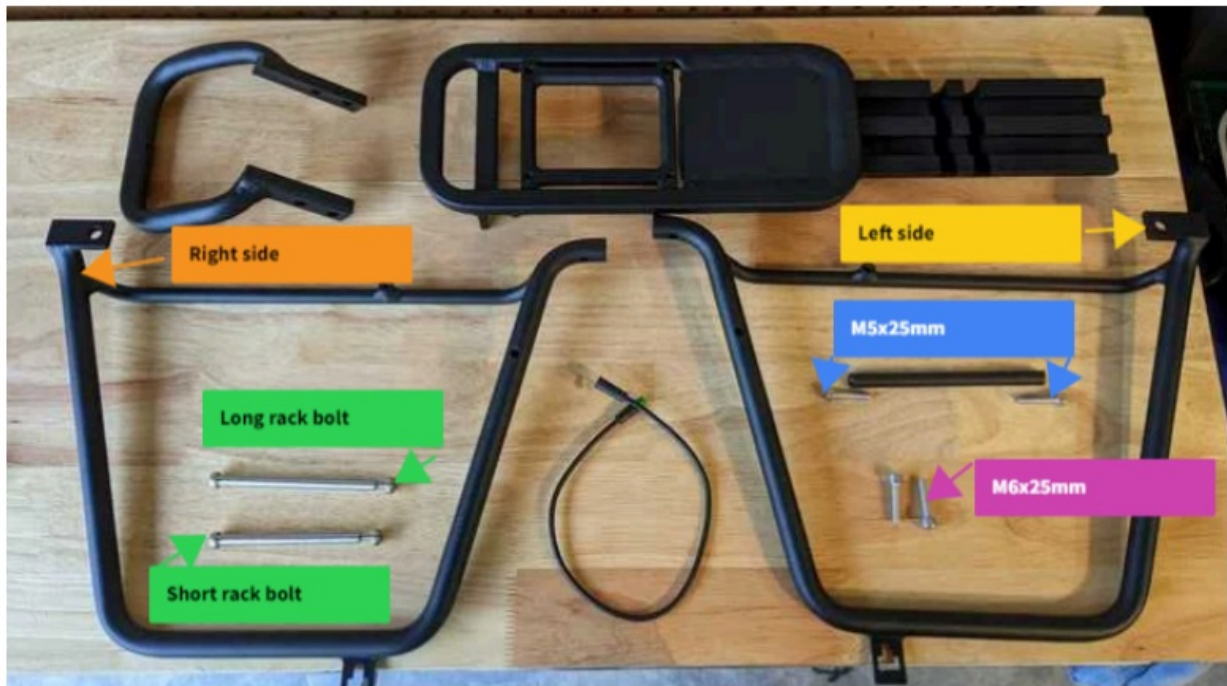

Step 2: Remove Rear Brake Light and Frame Plug

1. Cut the zip tie securing the rear light cable.
2. Unplug the light and remove it using an 8mm wrench to remove the nuts (save the hardware).
3. Unbolt the bracket using a 3mm and 4mm Allen wrench and remove it.
4. Pull out the rear frame plug once the bracket is removed.

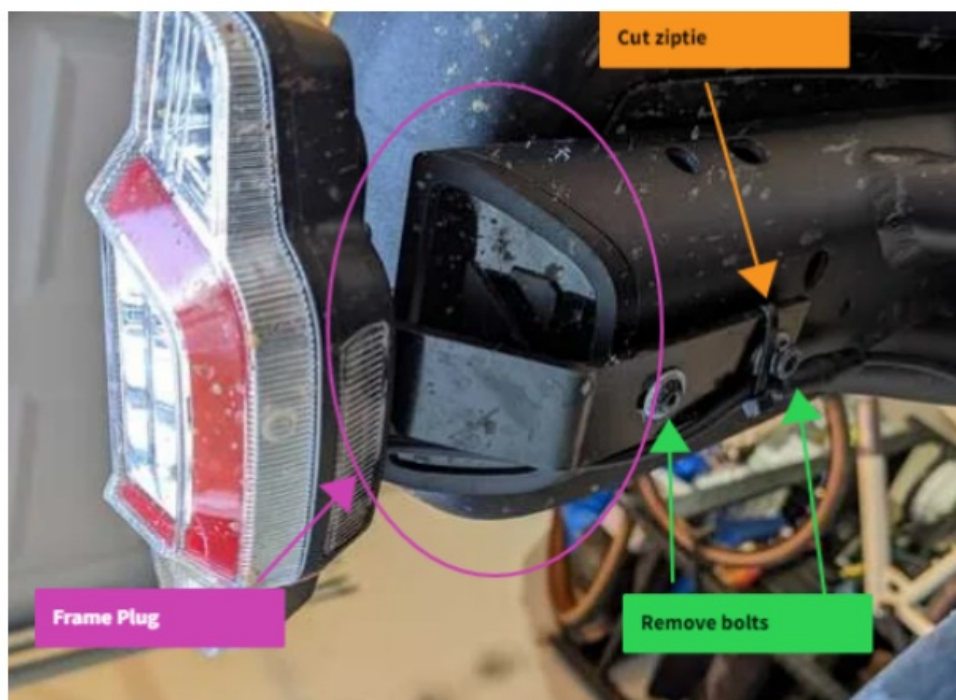


Step 3: Slide in the Utility Rack

1. Insert the rack into the frame, ensuring it is fully seated.
2. The frame holes should be fully visible for bolt installation.



Step 4: Install Grab Handle & Bolts

1. Position the grab handle by sliding it down between the rack and seat.
2. Use the shorter rack bolt to loosely secure the handle through the back hole

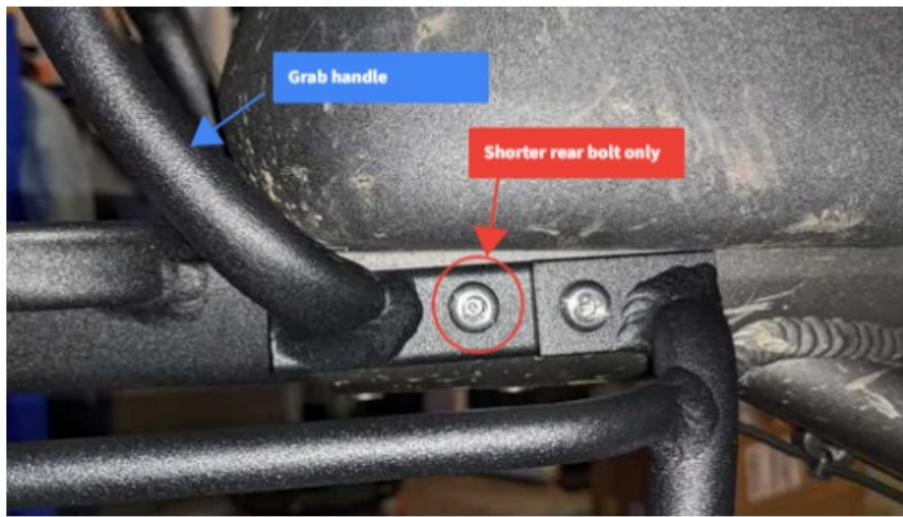

Step 5: Install Side Panels


1. Attach one side panel at a time, loosely inserting all bolts.
2. Secure the rear of the side panel using an M6x25mm bolt.
3. Insert the long front bolt through the side panel and rack, securing it on the other side with a short bolt.
4. Repeat for the opposite side.





Step 6: Install Rear Brace

1. Install the rear brace as shown below
2. The brace has angled ends to better fit the rack sides
3. Secure using the M5x25mm bolts

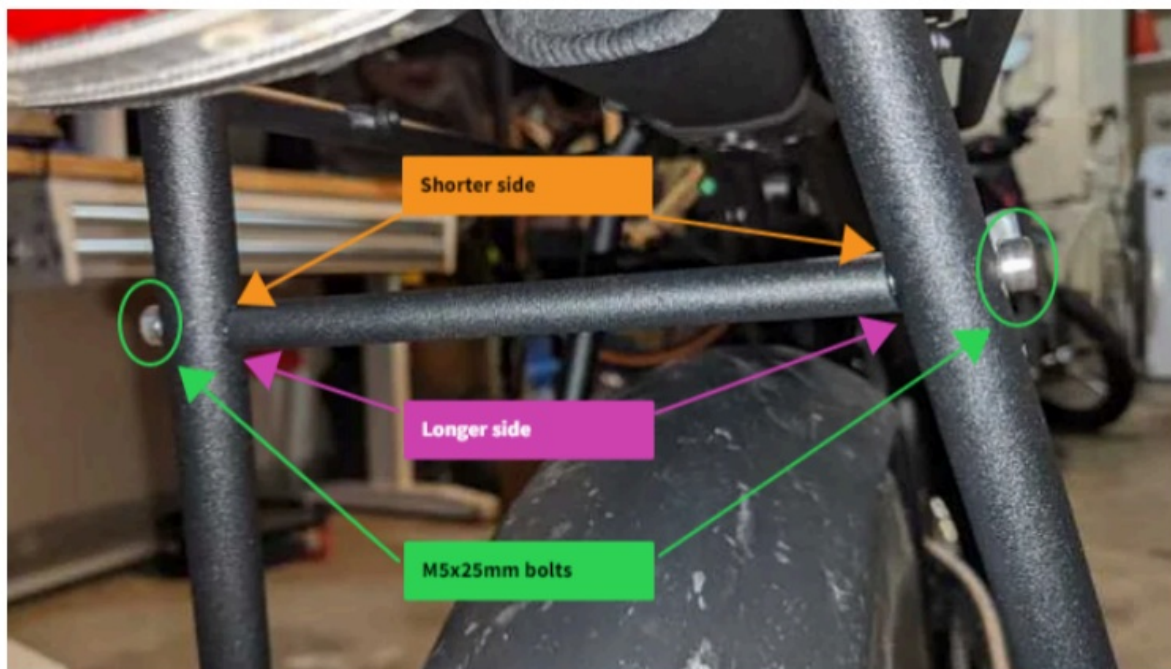

Step 7: Install Rear Brace

1. Go around the rack, tightening each bolt gradually to 3-5 Nm.
2. Repeat the process 2-3 times to ensure a secure fit.

Step 8: Install Rear Brace

1. Attach the rear light to the back of the rack using two 8mm nuts and washers.
2. Plug in the extension cable and route it along the frame.
3. Secure the extension cable to the taillight wire using two zip ties.



Final Steps & Review

- Do not exceed 100lbs of total weight on the rack and panniers
- Ensure all bolts are tightened.

- Heavy loads will affect the handling of the bike and caution should be taken when riding
- The rack is not to be used for stunt riding
- Periodically check the bolts to make sure they are secure.
- Ensure that straps or cargo cannot get into the rear wheel or interfere with the rear suspension

For any questions or additional assistance, please contact customer support.

Frequently Asked Questions

Q: What is the weight capacity of the Connect+ Revv 1 Rear Rack & Handle?

A: The weight capacity is up to 100lbs.


Q: Can I use the rack for stunt riding?

A: No, the rack is not intended for stunt riding.

Q: How should I secure heavy loads on the rack?

A: Ensure all bolts are tightened properly and do not exceed the weight limit of 100lbs.

Documents / Resources

	<p>RIDE1UP Revv1 HT Connect Plus Rear Rack and Handle [pdf] Installation Guide</p> <p>Revv1 FS, Revv1 HT, Revv1 HT Connect Plus Rear Rack and Handle, Revv1 HT, Connect Plus Rear Rack and Handle, Rear Rack and Handle, Rack and Handle, Handle</p>
---	--

References

- [User Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.