


ROBOWORKS Mecabot Autonomous Mobile Robot Platform for Indoor User Manual

[Home](#) » [ROBOWORKS](#) » ROBOWORKS Mecabot Autonomous Mobile Robot Platform for Indoor User Manual 

ROBOWORKS Mecabot Autonomous Mobile Robot Platform for Indoor User Manual

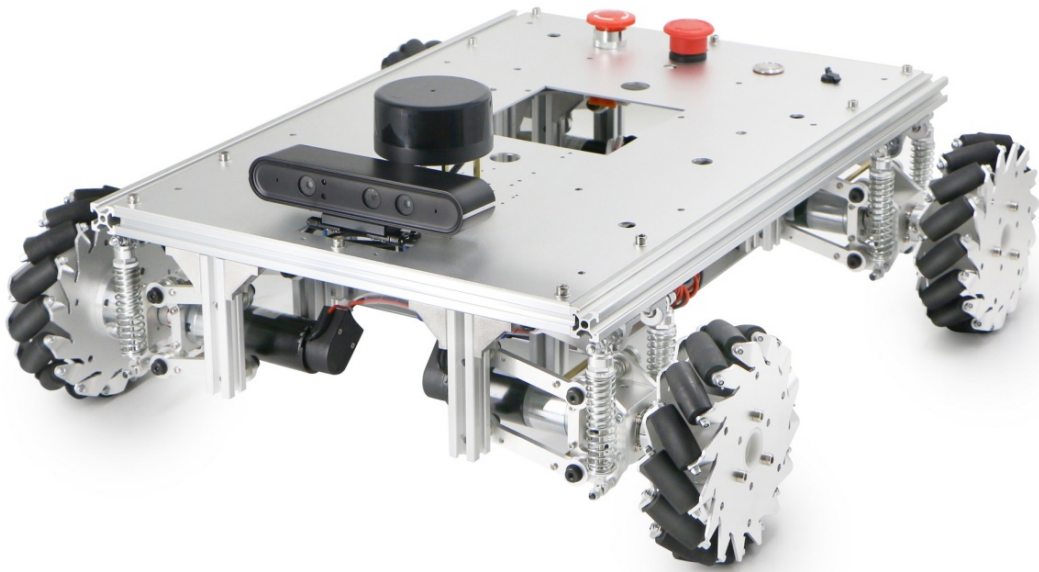

Contents

- 1 Mecabot Autonomous Mobile Robot Platform for Indoor
- 2 Key Components
- 3 Product Specifications
- 4 Introduction of ROS Controllers
- 5 Sensing System: LiDAR & Depth Camera
- 6 STM32 Board (Motor Control, Power Management & IMU)
- 7 Steering & Driving System
- 8 Battery Technical Specifications
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts

Mecabot Autonomous Mobile Robot Platform for Indoor

Summary

Mecabot is an educational and research robot based on ROS (Robot Operating System) for robotic researchers, educators, students and developers.

Mecabot is equipped with builtin ROS Controller, LiDAR, Depth Camera, STM32 Motor/Power/IMU Controller and metal chassis with omnidirectional mecanum wheels.

Mecabot is ideal for ROS beginners with affordable price, compact design and ready-to-go package. Mecabot is also a solid Autonomous Mobile Robot (AMR) platform for robotic education and research projects.

Mecabot comes with four varieties:

Mecabot – Suitable for ROS beginners and low budget projects.

Mecabot Pro – An ideal Autonomous Mobile Robot (AMR) platform for robotic education, R&D projects and rapid prototyping.


Mecabot Plus – An ideal Autonomous Mobile Robot (AMR) platform for indoor service robot applications. This category is serious enough to be considered for industrial and commercial development.



Mecabot X – An ideal Autonomous Mobile Robot (AMR) platform for indoor service robot applications with full metallic enclosure.

Mecabot comes with popular ROS controllers such as:


- Jetson Nano
- Jetson TX
- Xavier
- X86 Industrial PC (Built-to-Order Option)

Key Components

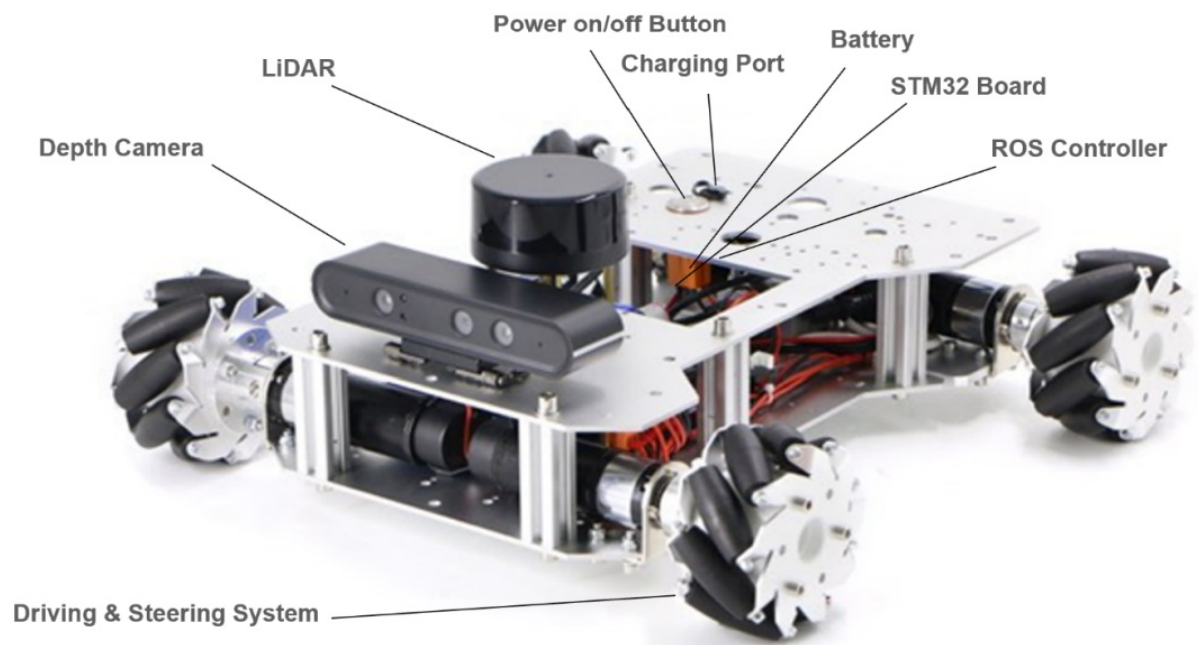


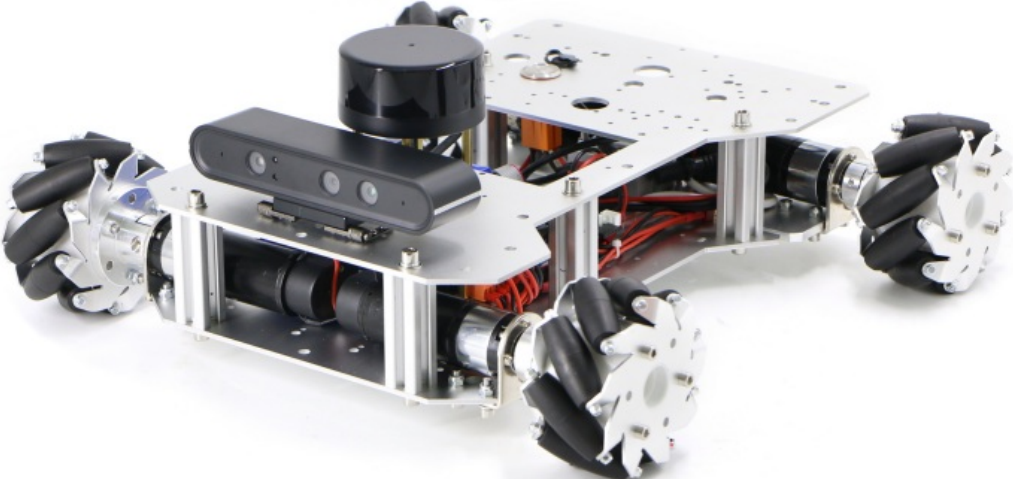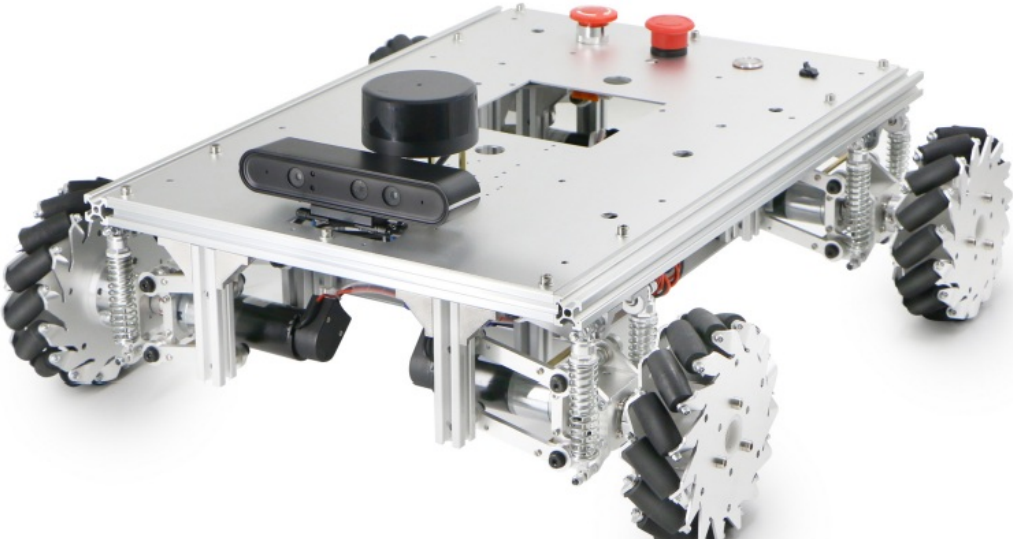Variation	Image
Mecabot	
Mecabot Pro	





Mecabot Plus

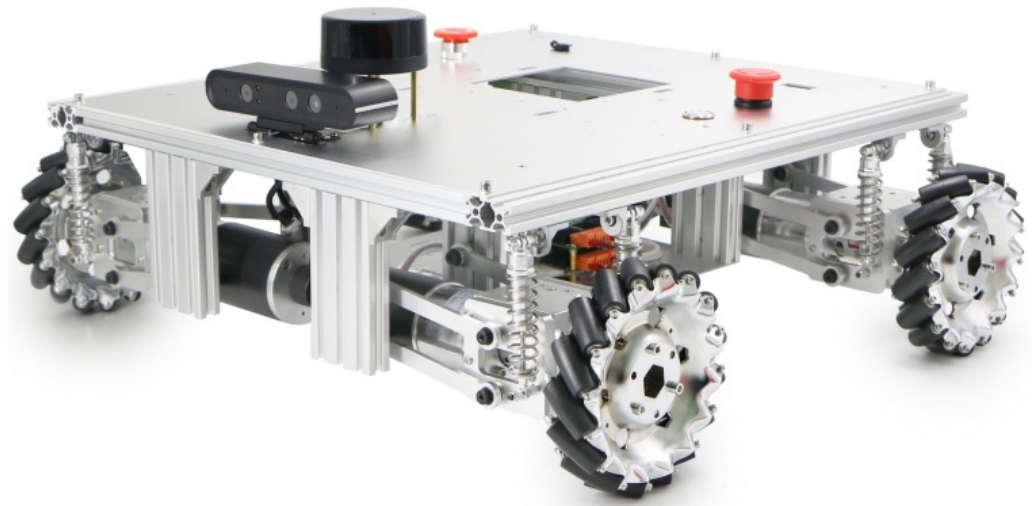

Mecabot X

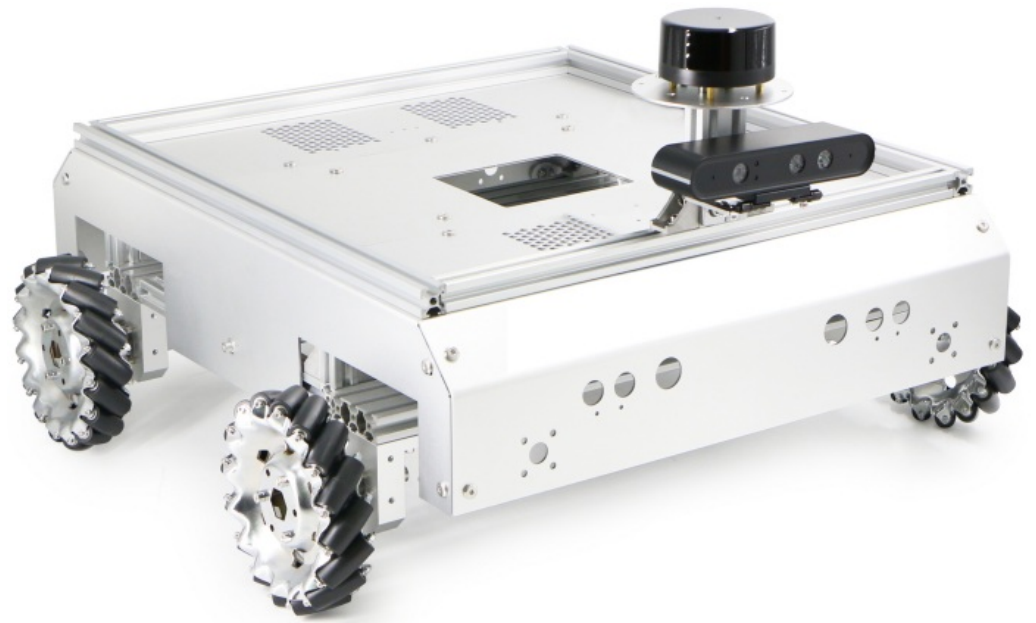

Product Specifications

	Mecabot	Mecabot Pro	Mecabot Plus	Mecabot X
Photo				
Independent Suspension	No	Yes	Yes	Yes
Dimension	407×410.5×153 mm	541×225.5×581 mm	636x554x248 mm	60x581x203 mm
Weight	6.1kg	10.8kg	19kg	20.5kg
Payload	15kg	20kg	60kg	60kg
Wheel Size (Diameter)	100mm	152mm		
Max Speed	1.2m/s	1.83m/s	1.39m/s	
Power Supply	22.2V, 5000 mAh battery, 2A charger			
Battery Life	6.5 hours without loading 5.5 hours with 3kg loading		3.5 hours without loading 2.8 hours with 3kg loading	
Motor and Reduction Ratio	MD36N 35W DC Brushed Motor 1:27 Reduction Ratio		MD60 100W DC Brushed Motor 1:18 Reduction Ratio	
Encoder	500-line giant magnetoresistance effect AB phase high-precision encoder			
I/O Interface	CAN, Serial Ports, USB, HDMI			
Remote Control	iOS/Android Apps (default) PS2, Model Aircraft Remote Control (optional and payable)			

Introduction of ROS Controllers

There are 3 types of ROS Controllers available for use with the Mecabot based on Nvidia Jetson platform. Jetson nano is suited more towards research and development. Jetson TX is ideal for product prototyping. Jetson Xavier is used more often in research and commercial applications. X86 Industrial PC is designed for robust commercial applications and it is only available for Built-to-Order configurations.

The following table illustrates the main technical differences between the various controllers available from Roboworks. Both boards allow high level computation and are suited towards advanced robotic applications such as computer vision, deep learning and motion planning.

	Jetson Nano	Jetson TX1	Xavier Nx
Users	Edu/R&D	R&D/Commercial	R&D/Commercial
CPU	ARM Cortex-A57 64bit@1.43GHz Quad Core	ARM Cortex-A57 MPCore 64bit@1.73GHz Quad Core	6 Core Nvidia Camel ARM v8.2 64bit, 6MB L2 +4MB L3
GPU	128-core Nvidia Maxwell	256-core Nvidia Maxwell	384-core Nvidia Volta
RAM	4GB 64 bit LPDDR4	4GB 64 bit LPDDR4	8GB 128 bit LPDDR4
Storage	64G MicroSD	16G eMMC 5.1 +64G Hard Drive	16G eMMC 5.1 +64G Hard Drive
USB	USB3x4	USB3x1 +MicroUSBx1	USB3.1x4

Sensing System: LiDAR & Depth Camera

A Leishen LSLiDAR is installed on all Mecabot variations with either the N10 or M10 model being used. These LiDAR's offer a 360 degree scanning range and surroundings perception and boast a compact and light design. They have a high Signal Noise Ratio and excellent detection performance on high/low reflectivity objects and perform well in strong light conditions. They have a detection range of 30 metres and a scan frequency of 12Hz. This LiDAR integrates seamlessly into the Mecabots, ensuring all mapping and navigational uses can be easily achieved in your project.

The below table summaries the technical specifications of the LSLiDARs:

LS LiDAR	N10	M10	C16 (3D)
Detection Range	25m	30m	70/120/150 m
Scan Frequency	10Hz	12Hz	5/10/20Hz
Samples Frequency	4,500Hz	20,000Hz	240,000Hz
Output Contents	Angular, Distant and Light Intensity Data	Angular and Distant Data	Angular, Distant, Time Stamp and Light Intensity Data
Angular Resolution	0,8	0,22	1-2
Interface Type	Serial Port	Ethernet Port	Ethernet Port


Additionally, all Mecabots are equipped with an Orbbec Astra Depth Camera, which is an RGBD camera. This camera is optimized for a range of uses including gesture control, skeleton tracking, 3D scanning and point cloud development. The following table summarizes the technical features of the depth camera.

Orbbec Astra Depth Camera	Specs
Depth Resolution	640×480
RBG Resolution	640×480
RGB Sensing Angle	63.1×49.4 degree
Depth Sensing Angle	58.4×45.5 degree
Monocular/Binocular Structural Light	Monocular Structural Light + Monocular RGB
Depth Frame per Second	640×480@30fps
RGB Frame per Second	640×480@30fps
Depth Range	0.6-4m
Data Transfer Interface	USB2.0 or above

STM32 Board (Motor Control, Power Management & IMU)

The STM32F103RC Board is the micro-controller used in all Mecabots. It has a high performance ARM Cortex - M3 32-bit RISC core operating at a 72MHz frequency along with high-speed embedded memories. It operates in - 40°C to +105°C temperature range, suiting all robotic applications in worldwide climates. There are power-saving modes which allow the design of low-power applications. Some of the applications of this micro-controller include: motor drives, application control, robotic application, medical and handheld equipment, PC and gaming peripherals, GPS platforms, industrial applications, alarm system video intercom and scanners.


STM32F103RC	Features
Core	ARM32-bit Cortex –M3 CPU Max speed of 72 MHz
Memories	512 KB of Flash memory 64kB of SRAM
Clock, Reset and Supply Management	2.0 to 3.6 V application supply and I/Os
Power	Sleep, Stop and Standby modes V BAT supply for RTC and backup registers
DMA	12-channel DMA controller
Debug Mode	SWD and JTAG interfaces Cortex-M3 Embedded Trace Mac rocell
I/O ports	51 I/O ports (mappable on 16 external interrupt vectors and 5V tolerant)
Timers	4×16-bit timers 2 x 16-bit motor control PWM timers (with emergency stop) 2 x watchdog timers (independent and Window) SysTick timer (24-bit downcounter) 2 x 16-bit basic timers to drive the DAC
Communication Interface	USB 2.0 full speed interface SDIO interface CAN interface (2.0B Active)

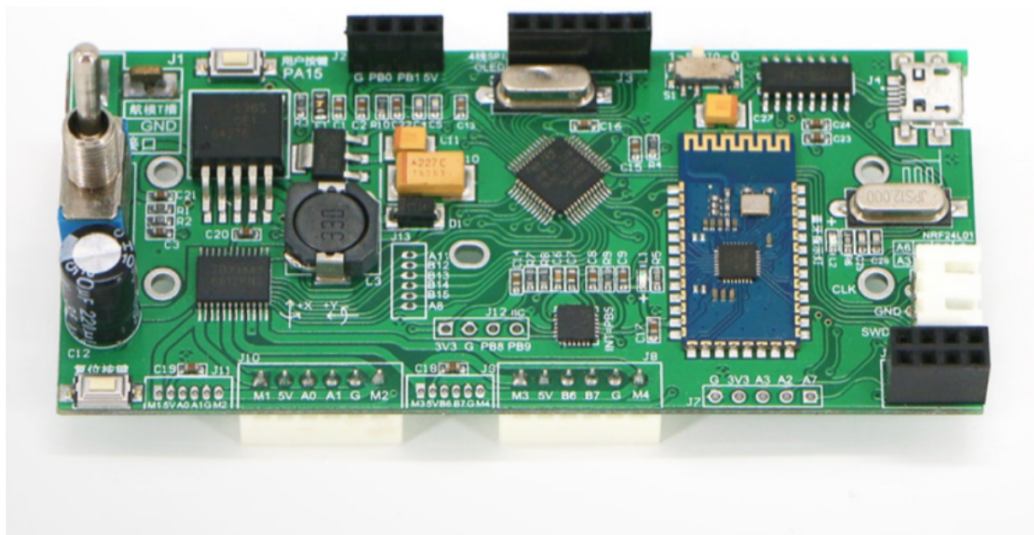

Steering & Driving System

The Steering and Driving system is integrated with the design and build of the Mecabot. Depending on the model purchased it will be either a 2 wheel or 4 wheel drive, with both options being suitable to a variety of research and development purposes. The wheels on all Mecabots are omnidirectional mecanum wheels with all varieties besides the standard Mecabot inclusive of an independent suspension system. The Mecabot family of robots are ideal for a wide variety of research and commercial applications making it the perfect robot for your next project.

Mecabot Chassis Design Diagram:

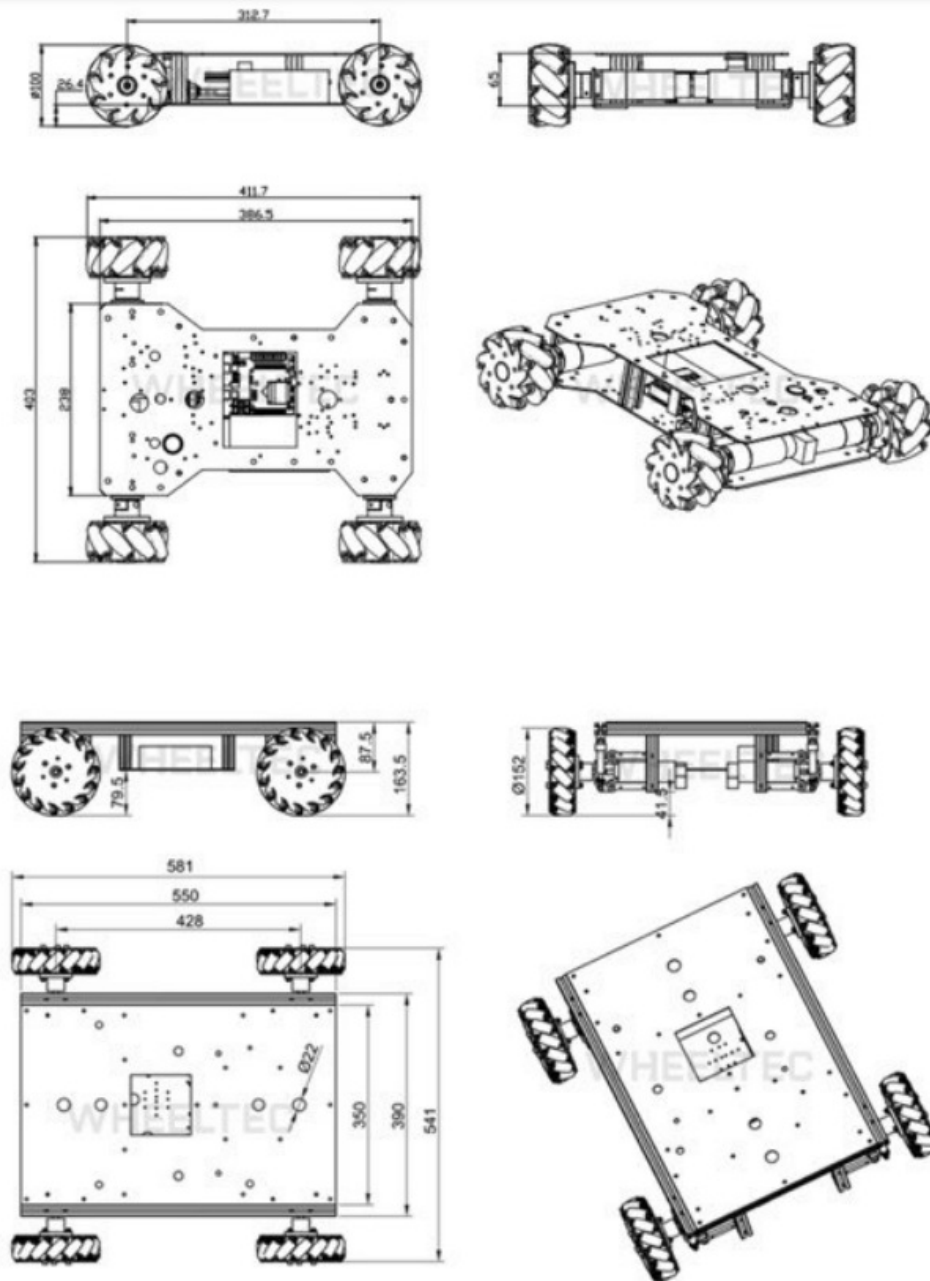

Battery Technical Specifications


All Mecabot come with a 5000 mAh battery and a Power Charger. Customers can upgrade the battery to 10000 mAh or 20000 mAh with additional cost. The 20000 mAh battery is too large to house within the enclosure of any Mecabots. It can only be installed on the top of the Robot chassis.

Battery parameter	Features		
	5000mAh	10000mAh	20000mAh
Battery Voltage	22.2V	22.2V	22.2V
Size	124*71*42mm	124*71*71mm	156`12211 mm
Power Charger	DC 5.5 Charging plug T-shaped discharge plug	DC 5.5 Charging plug T-shaped discharge plug	DC 5.5 Charging plug T-shaped discharge plug
Performance	15A continuous discharge	30A continuous discharge	60A continuous discharge
Weight	0.66kg	1.25kg	2.4kg

www.roboworks.net

Authors: Tara Hercz & Wayne Liu
25 February 2023

Documents / Resources

 <p>Mecabot User Manual</p>	<p>ROBOWORKS Mecabot Autonomous Mobile Robot Platform for Indoor [pdf] User Manual Mecabot Autonomous Mobile Robot Platform for Indoor, Mecabot, Autonomous Mobile Robot P latform for Indoor, Mobile Robot Platform for Indoor, Platform for Indoor, Indoor</p>
--	--

References

-  [Robot Educational Programable Mobile Robots | Roboworks](#)

Manuals+.