



ROG Lian Li O11 Dynamic XL Midi Tower Gaming Computer Case Installation Guide

[Home](#) » [ROG](#) » ROG Lian Li O11 Dynamic XL Midi Tower Gaming Computer Case Installation Guide 

Contents


- [1 ROG Lian Li O11 Dynamic XL Midi Tower Gaming Computer Case](#)
- [2 Case components](#)
- [3 Hardware list](#)
- [4 Remove top panel](#)
- [5 PSU installation](#)
- [6 Cable installation guide](#)
- [7 Motherboard Installation](#)
- [8 2.5" SSD / 3.5" HDD installation](#)
- [9 2.5" SSD installation](#)
- [10 Cable Management](#)
- [11 I/O ports function](#)
- [12 LED control board installation](#)
- [13 Graphics Card Anti-Sag Bracket \(GB-001\) installation](#)
- [14 Radiator & Cooling Support](#)
- [15 Hardware Clearance](#)
- [16 Documents / Resources](#)
- [17 Related Posts](#)



ROG Lian Li O11 Dynamic XL Midi Tower Gaming Computer Case

















Case components

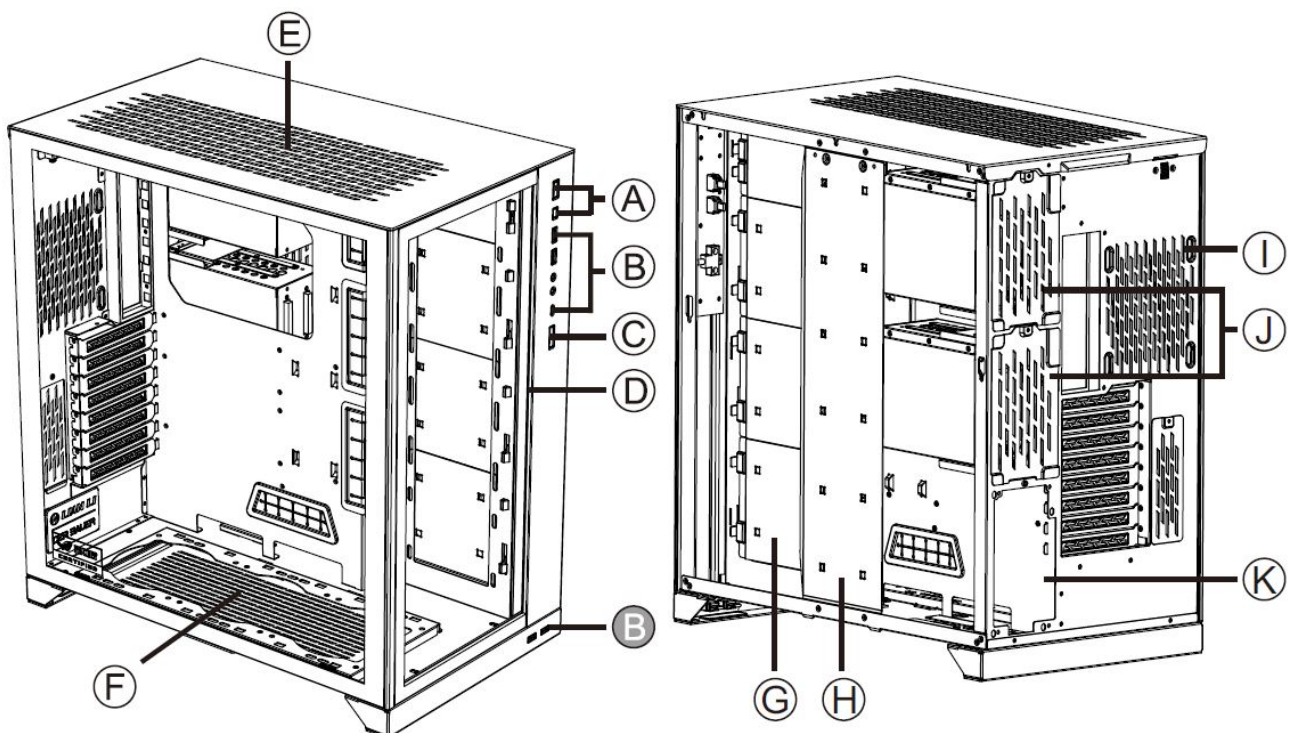

- A. Power switch / reset button


- B. IO ports: USB 3.0 x 2, HD audio & mic, USB 3.1 x 1 (Type-c)
- B. USB 3.0 x 2
- C. ARGB control button (M: Mode, C: Color).
- D. ARGB LED strip
- E. Supporting 120 mm fan x 3 or 140 mm fan x 2 or 360 mm radiator x 1
- F. Removable fan/SSD tray: Supporting 120 mm fan x 3 or 140 mm fan x 2 or 360 mm radiator x 1 or 2.5" SSD x 3
- G. Additional SSD trays x 3: Supporting 120 mm fan x 3 or 360 mm radiator x 1 or 2.5" SSD x 3
- H. Removable SSD tray: Supporting 2.5" SSD x 3
- I. Supporting 120mm fan x 1
- J. Hot swappable drive trays: Supporting 3.5" HDD x 4 or 2.5" SSD x 4 or ATX PSU x 2
- K. PSU tray: Supporting ATX PSU x 1

Hardware list

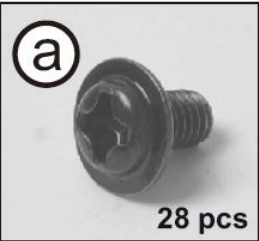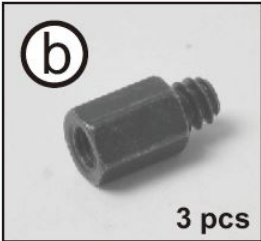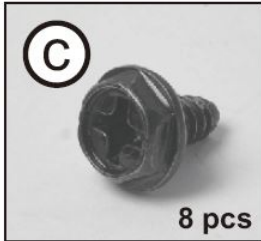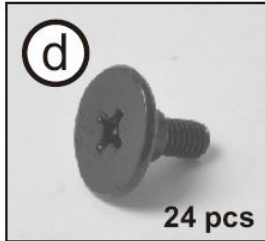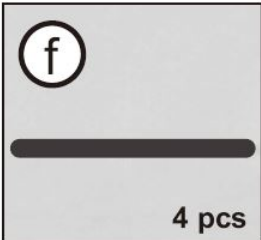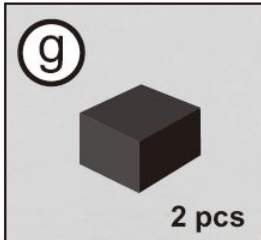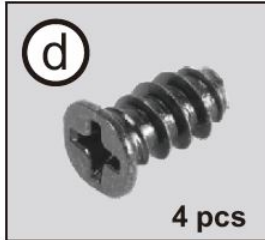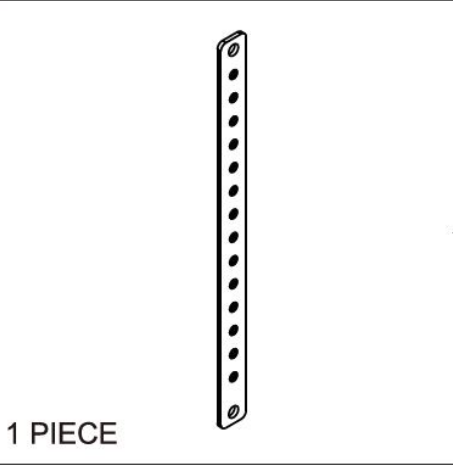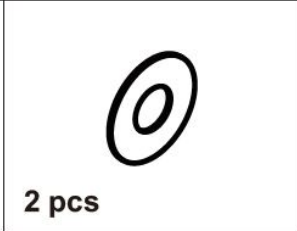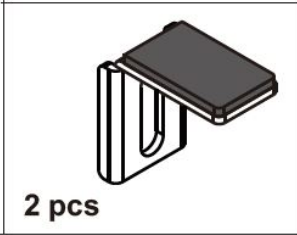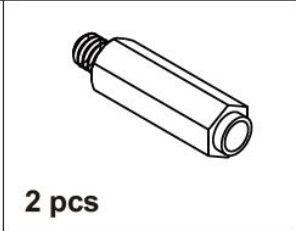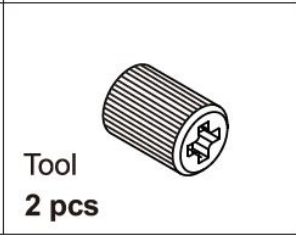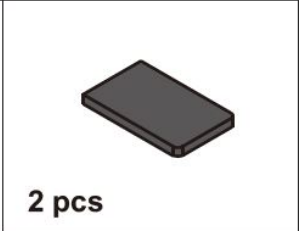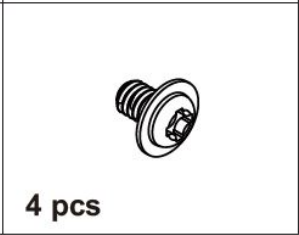
 a 28 pcs Screws for motherboard & 2.5" SSD mount	 b 3 pcs Stand-off bolt (Spare parts) for motherboard mount	 c 8 pcs Screws for PSU mounting	 d 24 pcs Screws for 2.5" SSD mount
 e 16 pcs Screws for 3.5" HDD mount	 f 4 pcs Velcro for cable management	 g 2 pcs Rubber pad for PSU mounting	 d 4 pcs Screws for fan mounting
 1 PIECE	 2 pcs  2 pcs	 2 pcs  Tool 2 pcs	 2 pcs  4 pcs

For Graphics Card Anti-Sag Bracket (GB-001) installation. Exceeded quantity are spare parts



Remove top panel

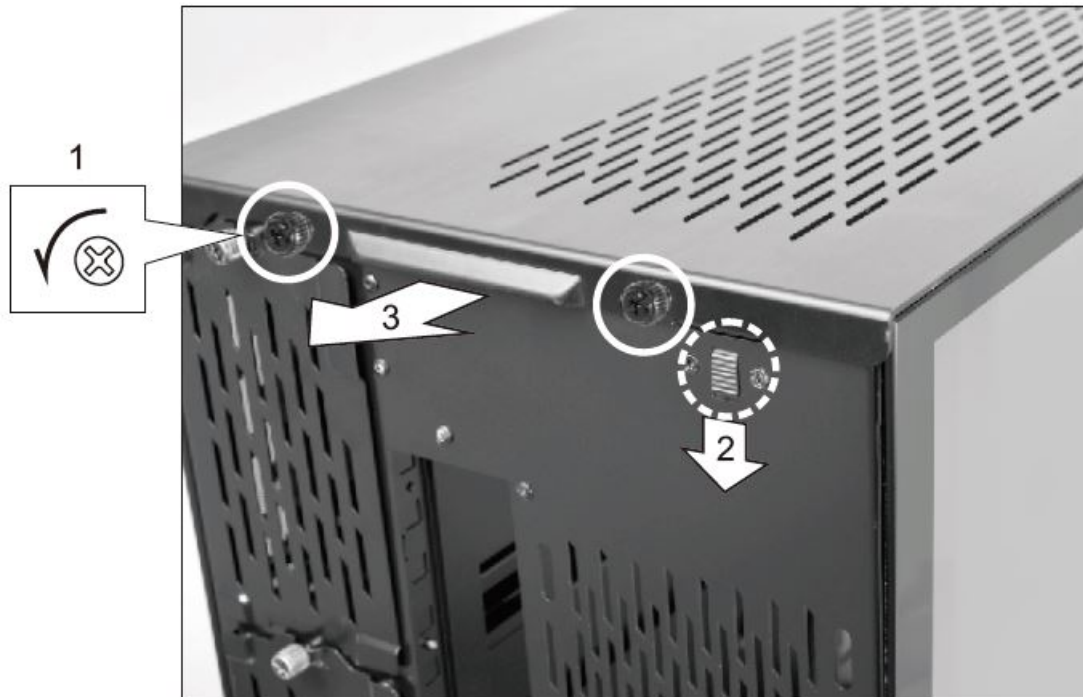




Remove side glass & front glass

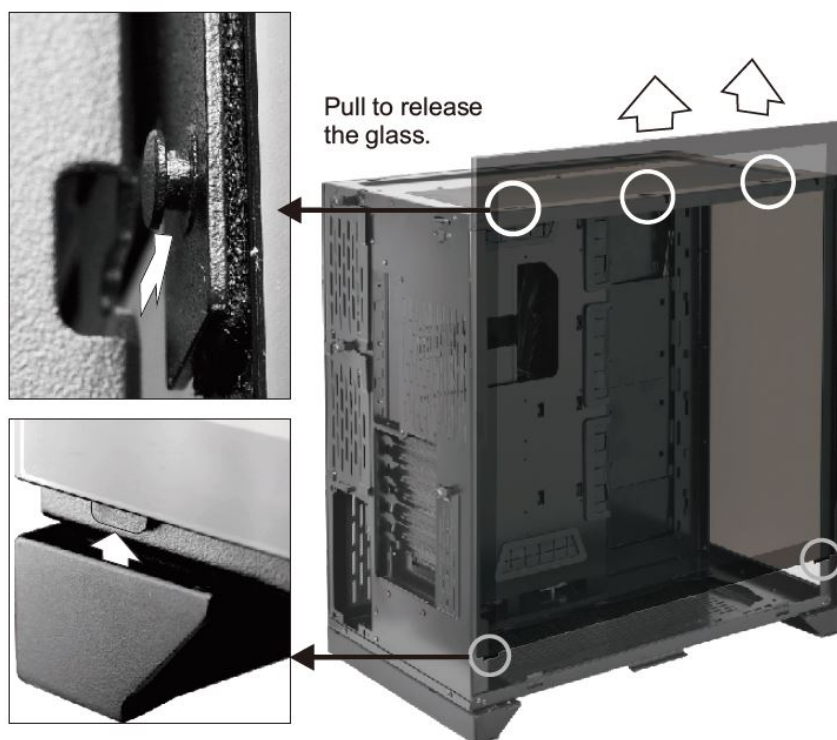


! Attention:
Peel off the protective film
on both sides

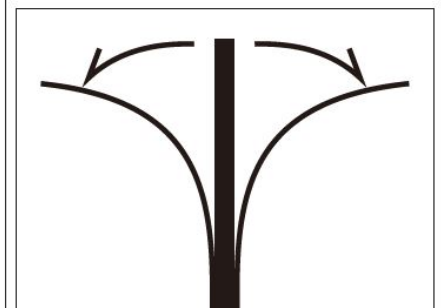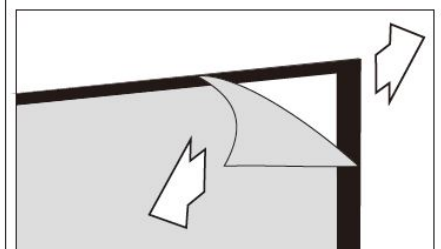

PSU installation

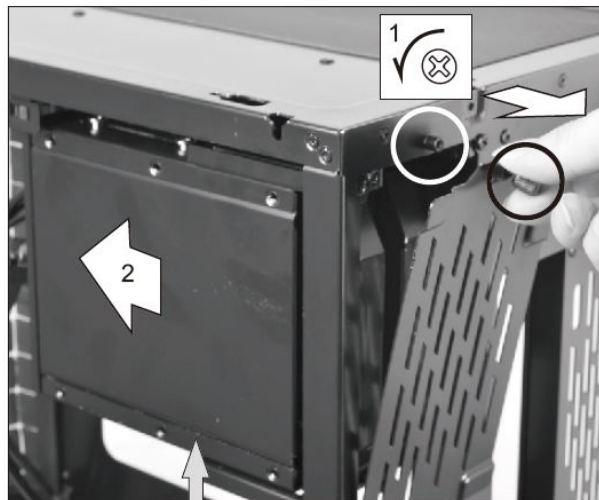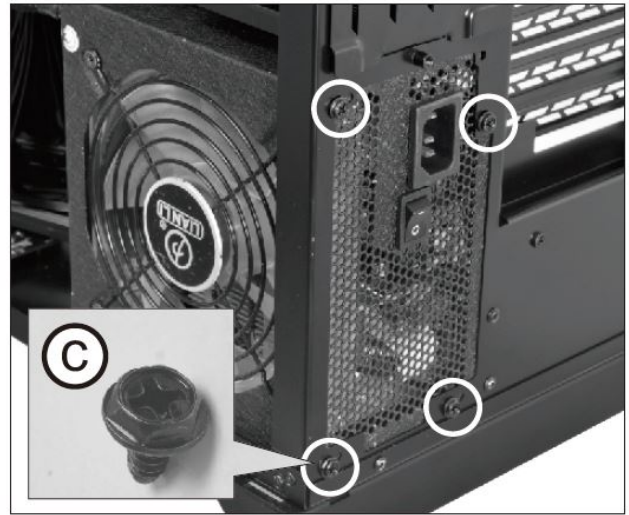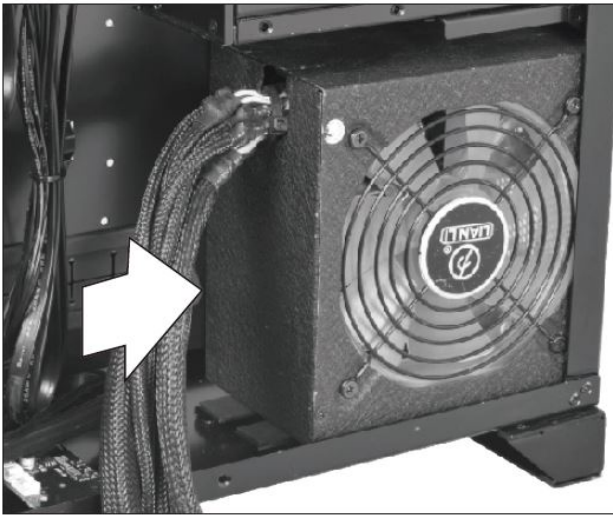




To install 2 more PSUs, remove the 2 hot swappable drive trays.

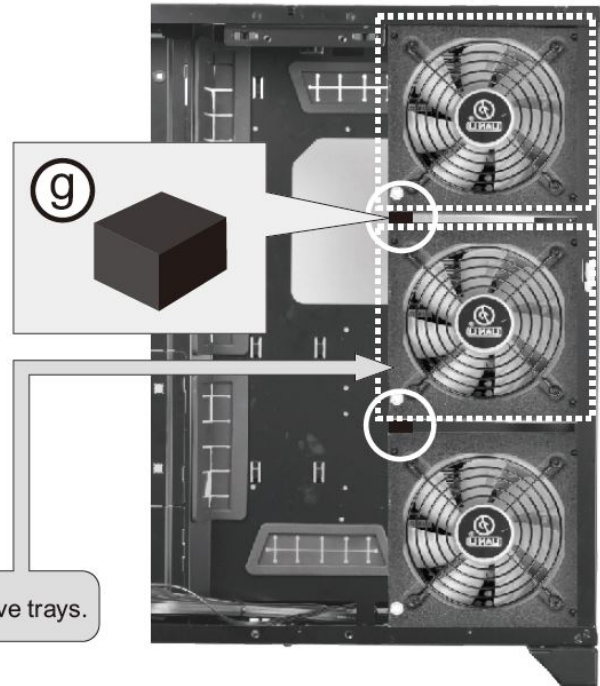






Cable installation guide

BLACK / WHITE - BLACK +	POWER SW	
BLACK / WHITE - BLACK +	RESET SW	
BLACK / WHITE - BLACK +	POWER LED	
	POWER LED	
BLACK / WHITE - BLACK +	HDD LED	

Motherboard Installation

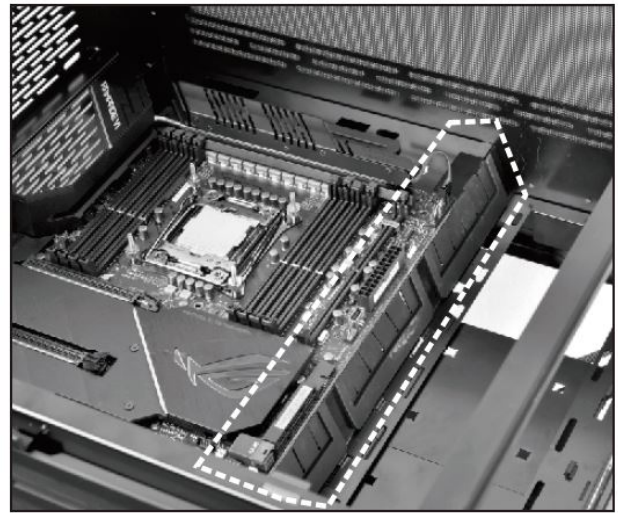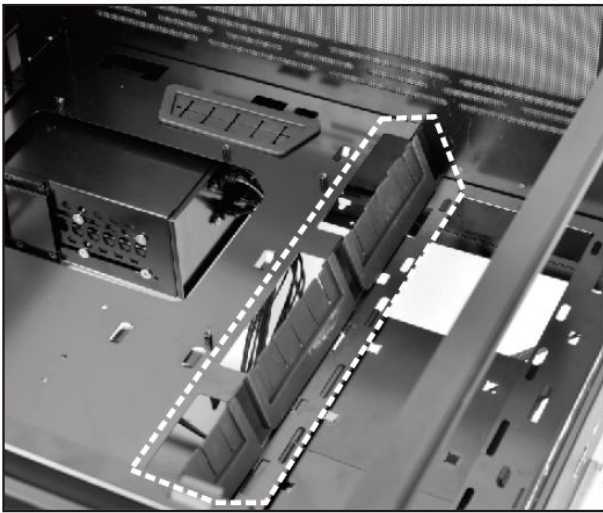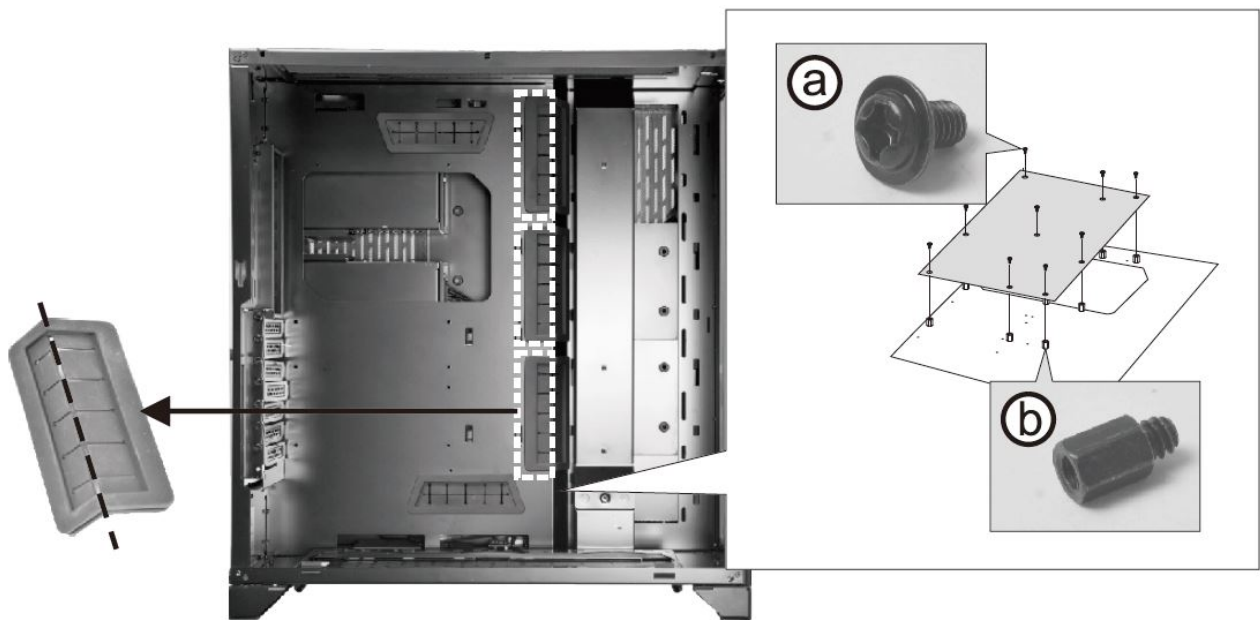


2.5" SSD / 3.5" HDD installation

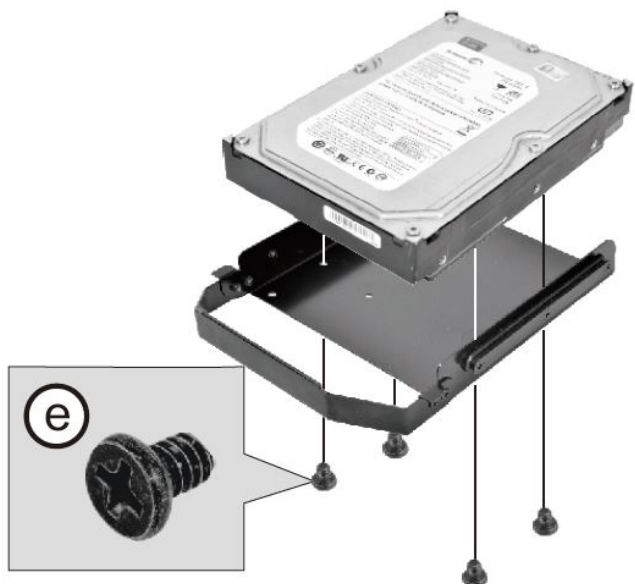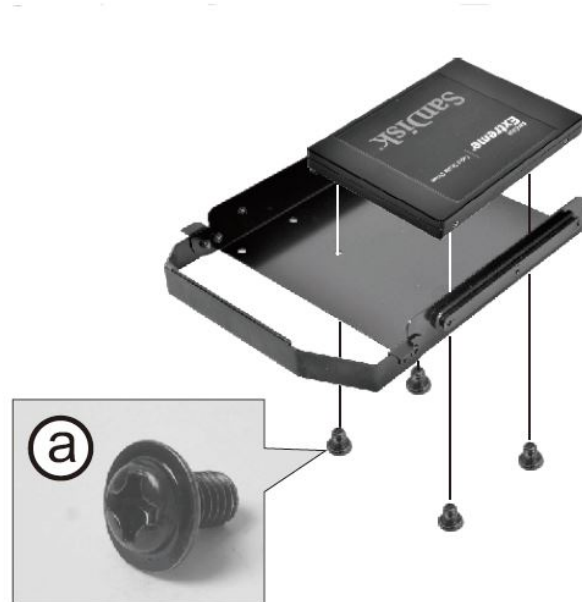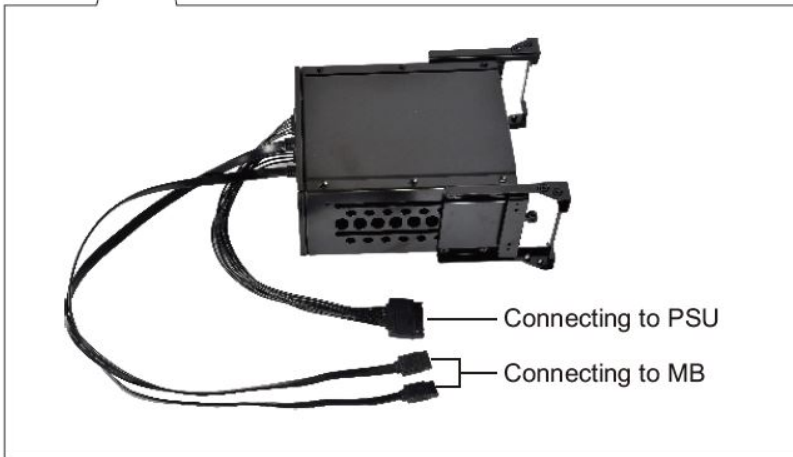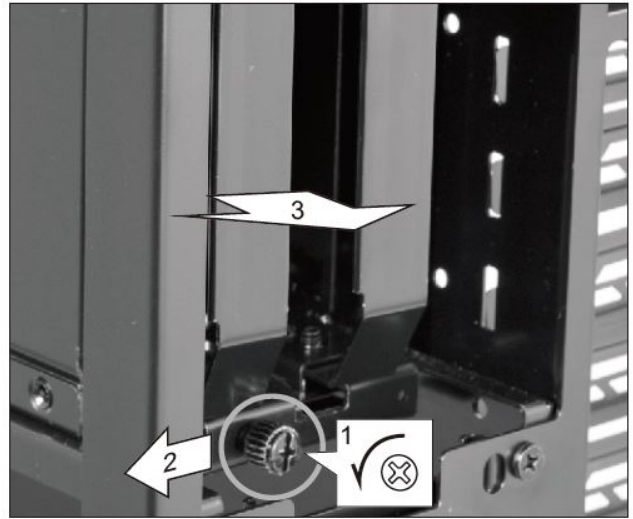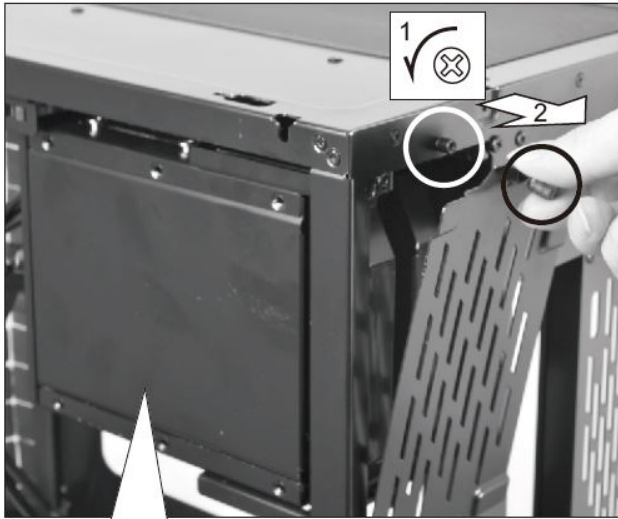



2.5" SSD installation




Press to release the HDD tray

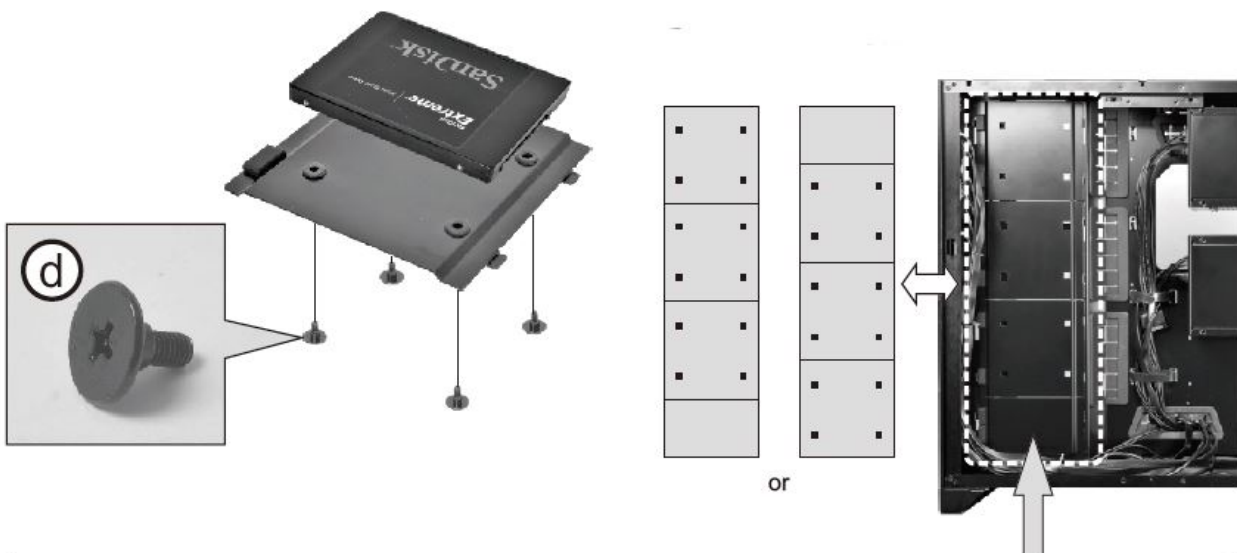



3+1 additional SSD trays can be installed on the front right side and/or on the removable fan/SSD tray on the bottom

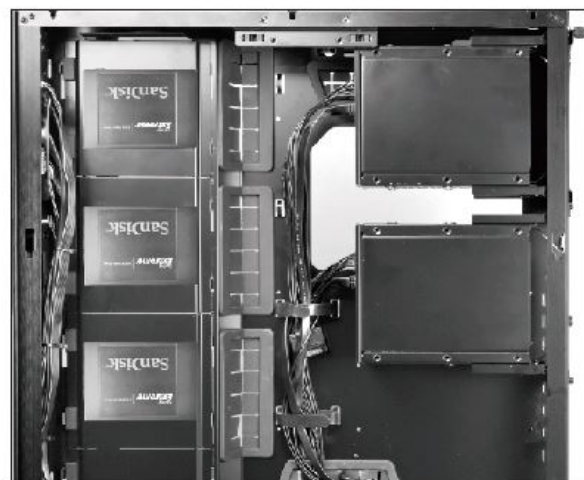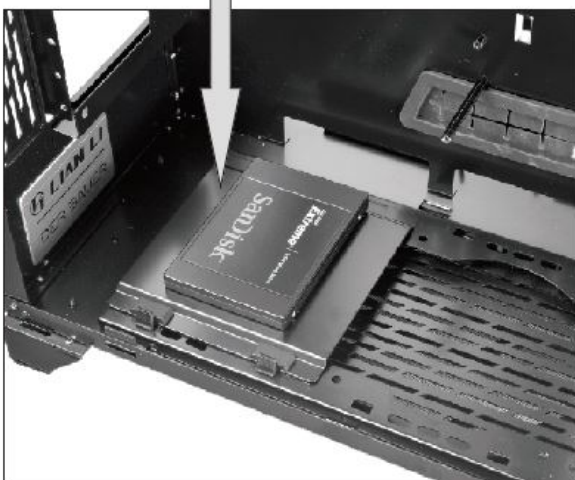




2.5" SSD installation

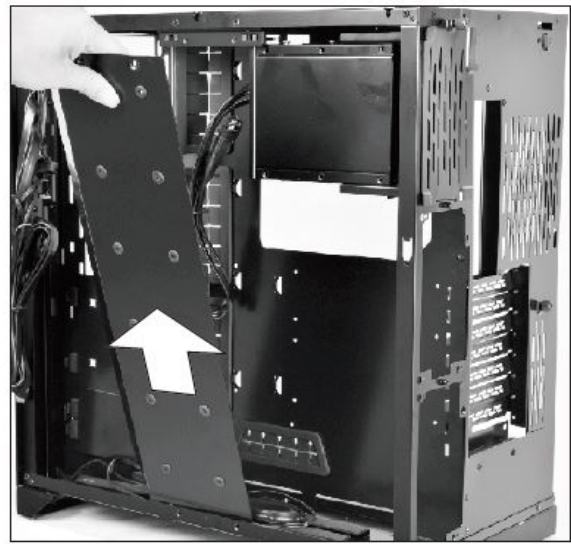

Cable Management

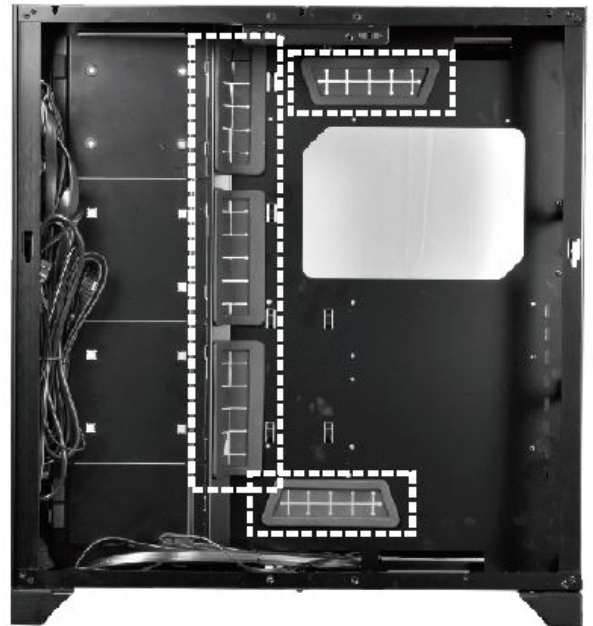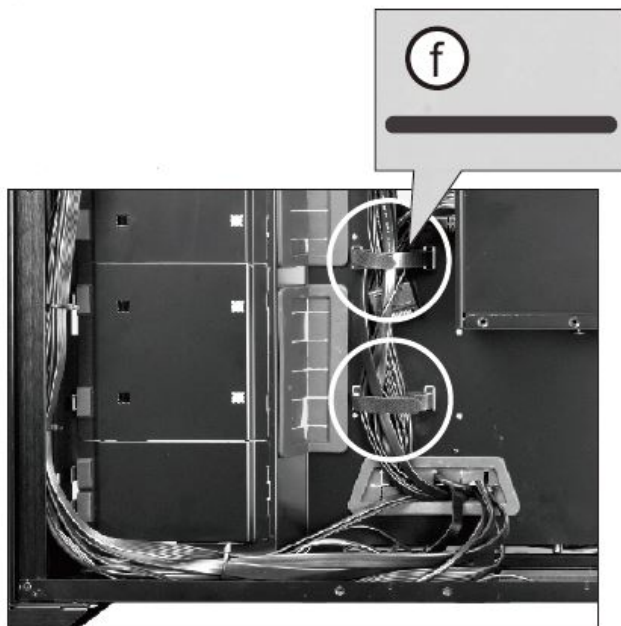


Remove the magnetic dust filters

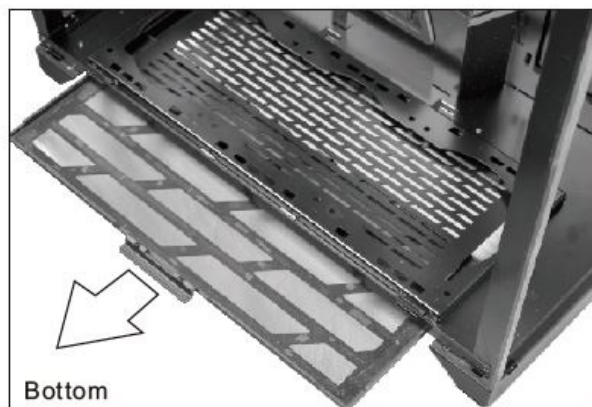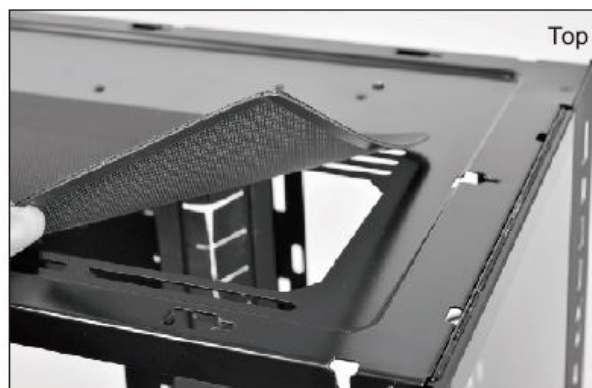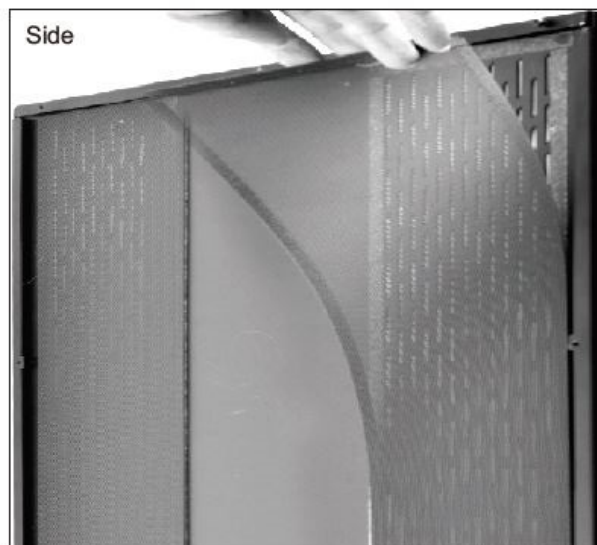


I/O ports function

HD AUDIO

Blue	10	9	Green
Black	8	7	Key
Yellow	6	5	Orange
Gray	4	3	N.C.
Red	2	1	GND+H.S. TUBE

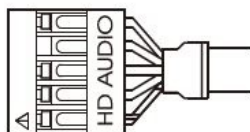


USB 3.1 GEN.2



USB 3.0

Supports motherboard
USB 3.0 20 Pin header

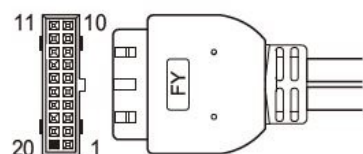


— Mode

8 Lighting Effects:



- 1st-7th: MCU Built-in Lighting Mode
- 8th: Sync Up the ARGB Lighting With The Motherboard
 - (1) Connecting The Header To The Motherboard
 - (2) To Turn Off The Lighting, Press The Button For 3 Sec. To Turn It On, Press Again For 3 Sec

C- Color

Press C To Control The 7 Built-in Static Colors

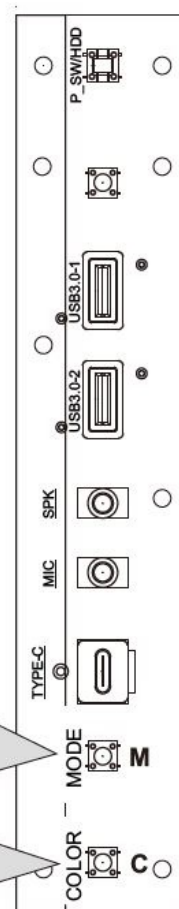

LED control board installation

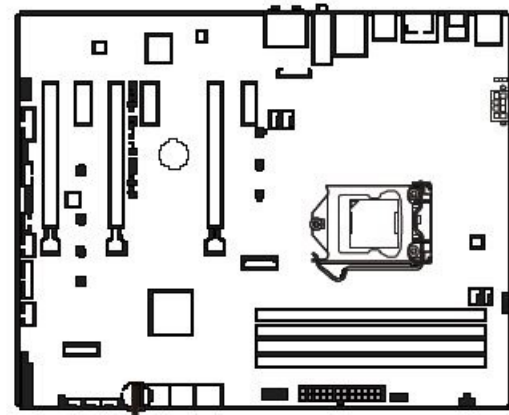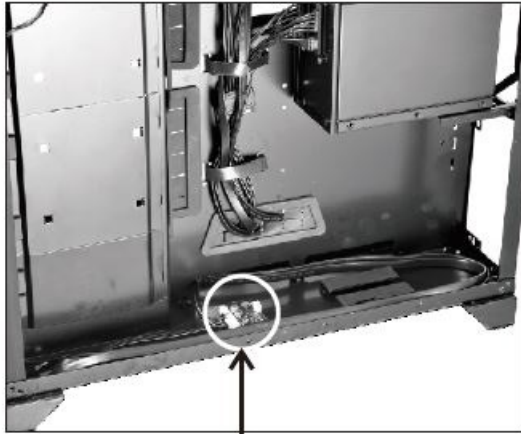



ADDRESS LED HEADER




+5V D GND



Connecting to MB

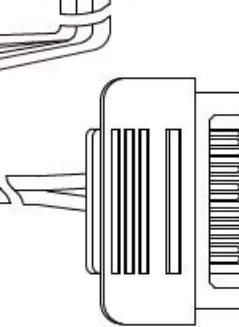





Connecting to PSU

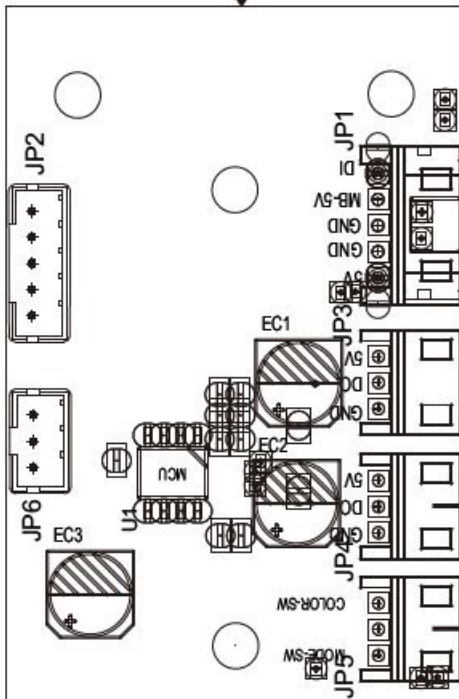


Already connected to the ARGB LED strip on the front

Putting the header of M/C button into this header

Graphics Card Anti-Sag Bracket (GB-001) installation

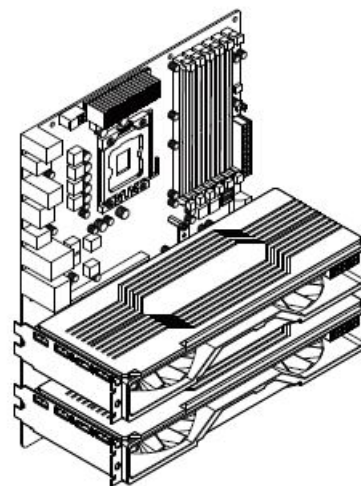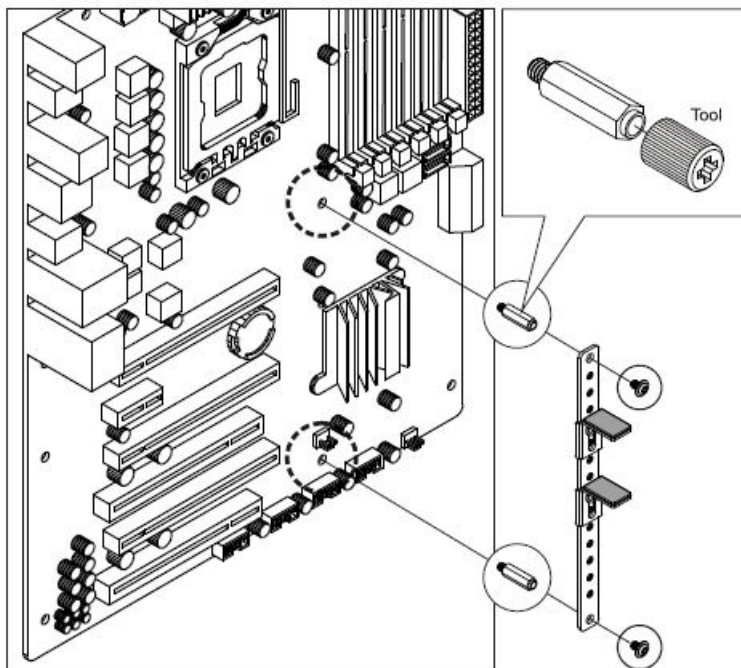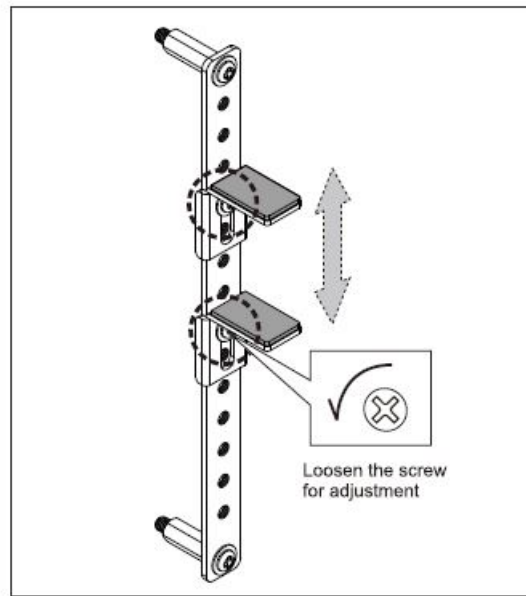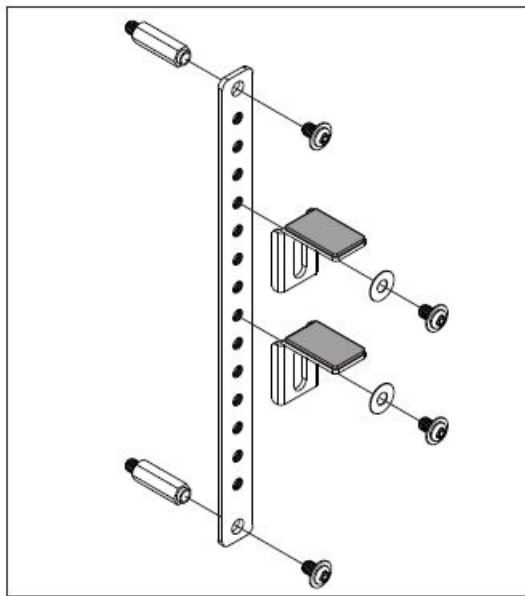

Radiator & Cooling Support


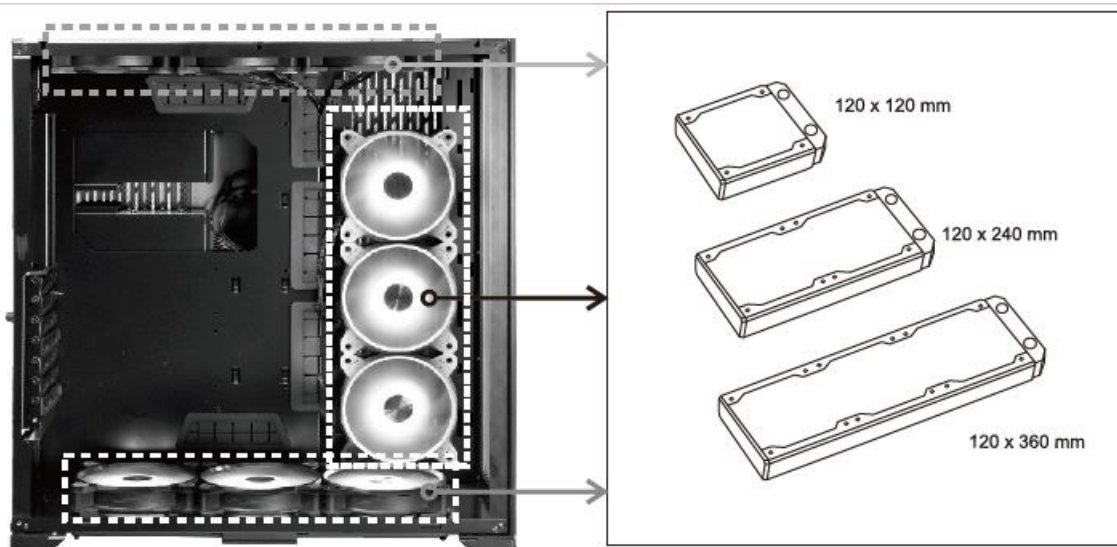


011DXL-1

011DXL-2

011DXL-3

011DXL-4

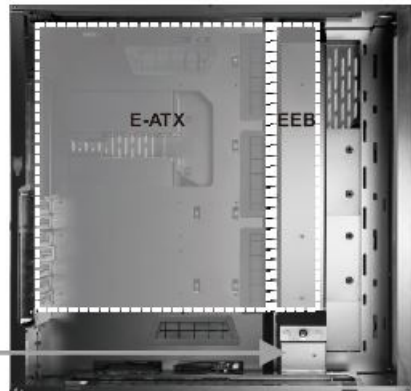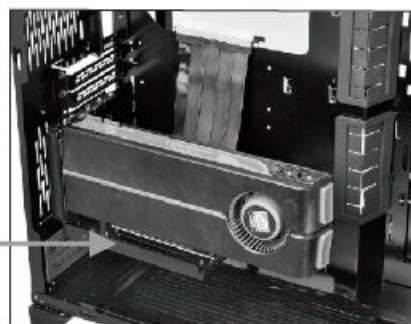

Optional kits

Model: O11DXL-1 Upright Display Card Kits






200 mm PCI-e Express 16X Riser Card Adapter Extender Cable Kit.

Model: O11DXL-2 Extension panel

For EEB sized MB installation.

Hardware Clearance

- CPU Air Cooler
- GPU
- PSU
- Radiator Clearance

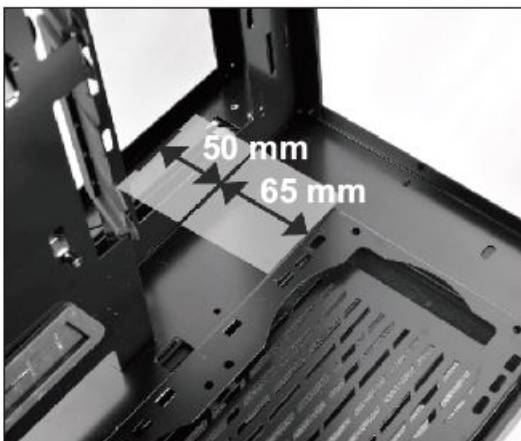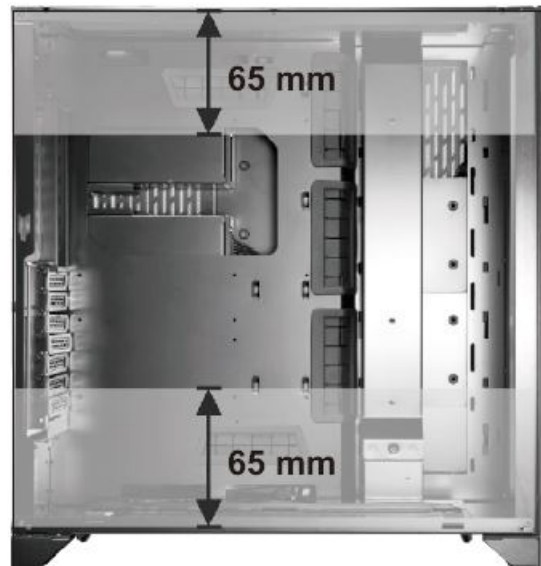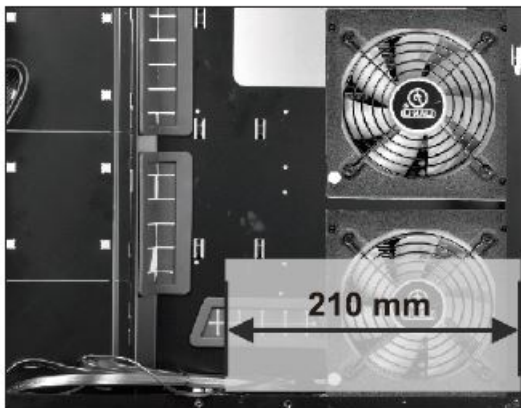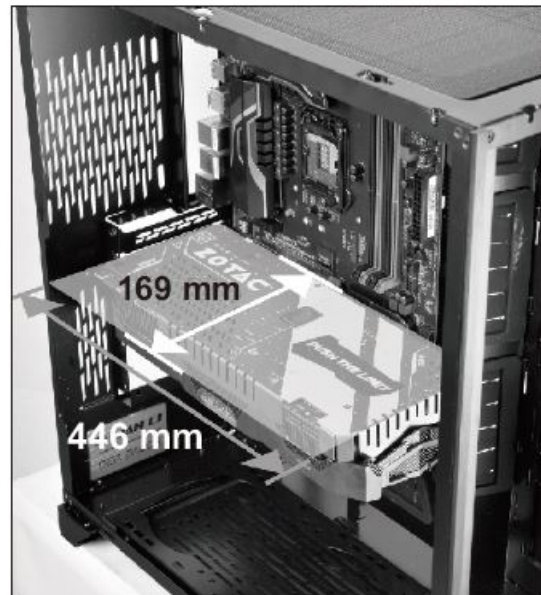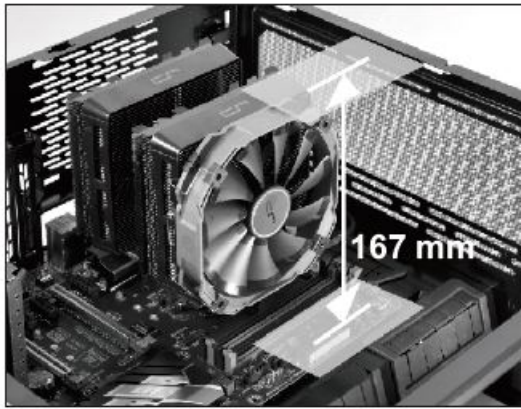

Documents / Resources



[ROG Lian Li O11 Dynamic XL Midi Tower Gaming Computer Case](#) [pdf] Installation Guide
Lian Li O11, Dynamic XL Midi Tower Gaming Computer Case