

[Skip to content](#)

Manuals+

User Manuals Simplified.

Roland JX-08 Sound Module User Guide



[Home](#) » [Roland](#) » [Roland JX-08 Sound Module User Guide](#)

JX-08 Quick Start


Before using this unit, carefully read “USING THE UNIT SAFELY” and “IMPORTANT NOTES” (the leaflet “USING THE UNIT SAFELY”). After reading, keep the document(s) where it will be available for immediate reference.

Contents [hide](#)
[1 Panel Descriptions](#)
[2 Rear Panel](#)

- [3 Outputting Sound](#)
- [4 Online Manual](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Panel Descriptions

Top Panel (Control Section)

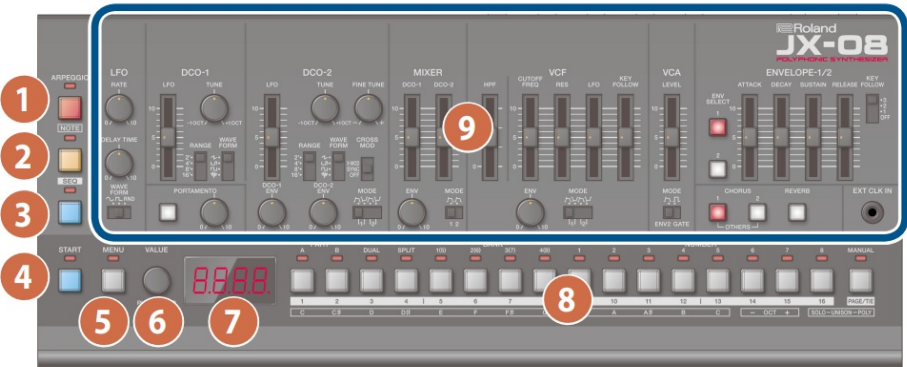

No.	Name	Explanation
1	[ARPEGGIO] button	Turns the arpeggio on/off. Long-press the button to show the arpeggio settings menu.
2	[NOTE] button	When this is on, you can use the (11-[13] buttons as a keyboard.
3	[SEQ] button	When this is on, you can edit the sequencer.
4	[START] button	Plays back (the button lights up) or stops the sequencer (the button goes dark). Use this together with the [1]-[16] buttons to switch to different patterns.
5	[MENU] button	Displays the sequencer settings menu. When the [SEQ] button is on, this displays the sequencer settings menu.
6	[VALUE] knob	Edits the parameter’s value. Press the knob to confirm the value or operation.
7	Display	Shows the bank and patch number, parameter value, and tempo.
8	[1]-[16], [PAGE/TIE] button	Use these buttons to switch between tones (patch/bank), and to input notes into the sequencer.
9	Tone section (controls inside the outlined section)	Use these controls to edit the tones. Refer to the manual on our website for details.

Rear Panel



* To prevent malfunction and equipment failure, always turn down the volume, and turn off all the units before making any connections.

No.	Name	Explanation
10	[POWER] switch	This turns the power on/off.
11	USB Type-C® port	Use a commercially available USB Type-C cable to connect this port to your computer. It can be used to transfer USB M USB audio data. You must install the USB driver when connecting the XJ-08 to your computer. Download the USB driver from the website. https://www.roland.com/global/support/
12	[VOLUME] knob	Adjusts the volume.
13	PHONES jack	Connect headphones (sold separately) here.
14	ODOUTPUT jack	Connect this jack to your amp or monitor speakers.
15	MIX IN jack	This is the audio input jack. Sound from the connected device is output from the PHONES jack and OUTPUT jack.
16	MIDI connectors	Connect a MIDI device to these connectors using a commercially available MIDI cable. This lets you control the connect devices from this unit.

Outputting Sound

1. Turn the JX-08 power on.

* Before turning the unit on/off, always be sure to turn the volume down. Even with the volume turned down, you might hear some sound when switching the unit on/off. However, this is normal and does not indicate a malfunction.

2. Hold down the [START] button and press the [9]– [16] buttons (NUMBER 1–8).

Select a pattern. The pattern number appears on the display.

3. Press the [START] button.

This plays back the pattern. Press the [START] button again to stop the pattern.

Online Manual

For more details on this unit, refer to the online manual (HTML) by accessing the link below.



https://roland.cm/jx-08_om

© 2021 Roland Corporation

Documents / Resources



[Roland JX-08 Sound Module](#) [pdf] User Guide
JX-08, Sound Module

[Manuals+](#),

- [home](#)
- [privacy](#)