


Contents [[hide](#)]

- [1 Roth QuickTemp Compact System](#)
- [2 Product Specifications](#)
- [3 Installation Steps](#)
- [4 FAQs](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)




Roth QuickTemp Compact System

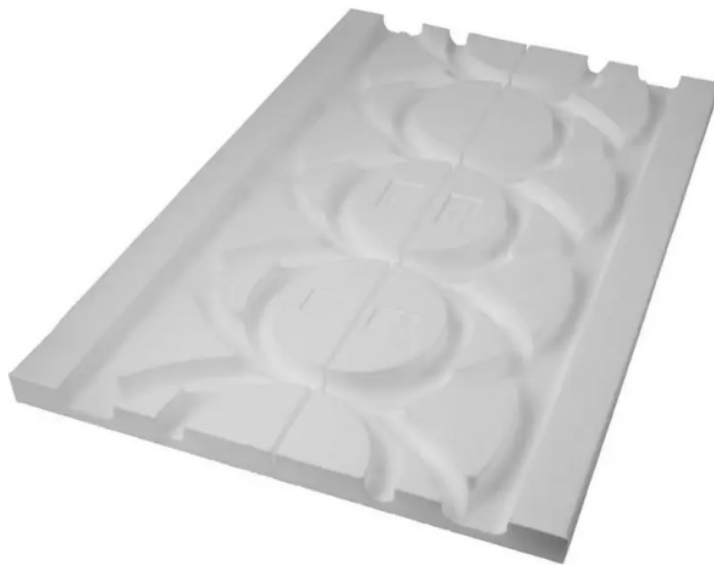


Product Specifications

- Dimensions: 61 cm x 61 cm x 40 cm
- Maximum load: 2mm per meter


- Assembly required

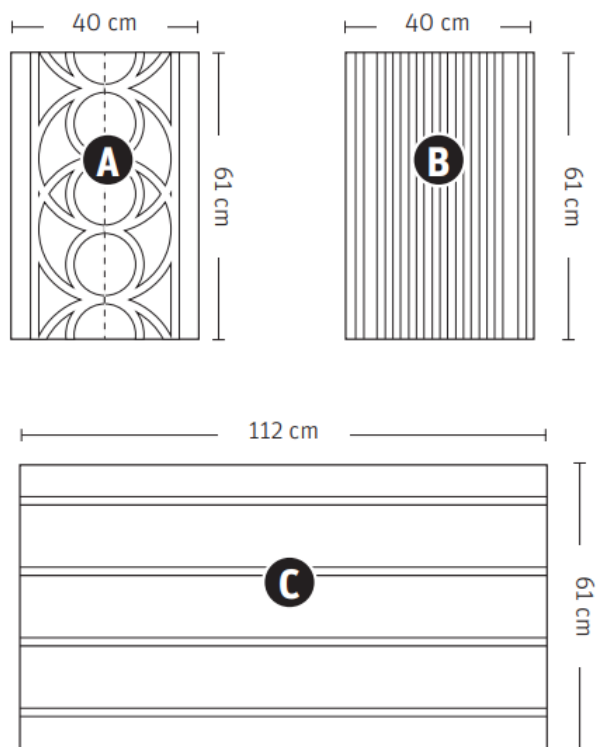


Planlæg hvordan Compact pladerne skal udlægges. OBS.

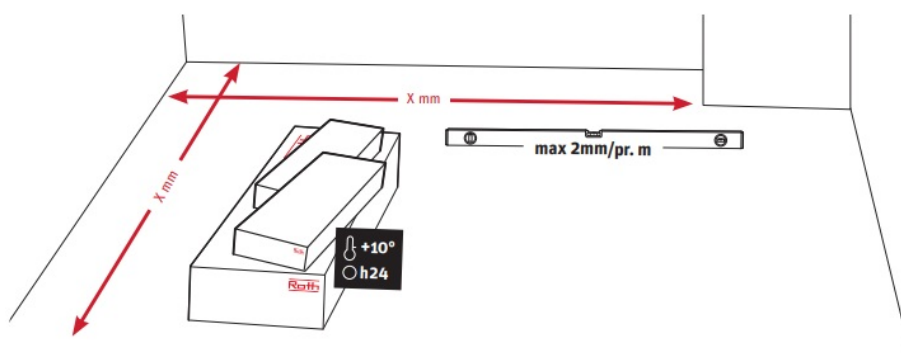


Always read the full documentation

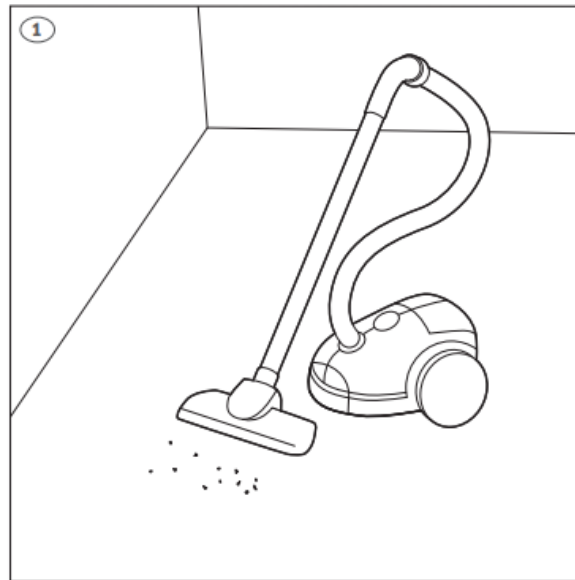


Vacuum the subfloor.

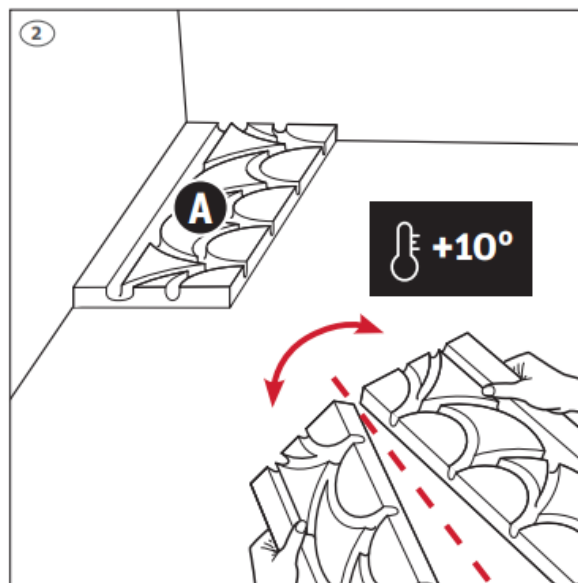


Split the turn plate and lay it first.

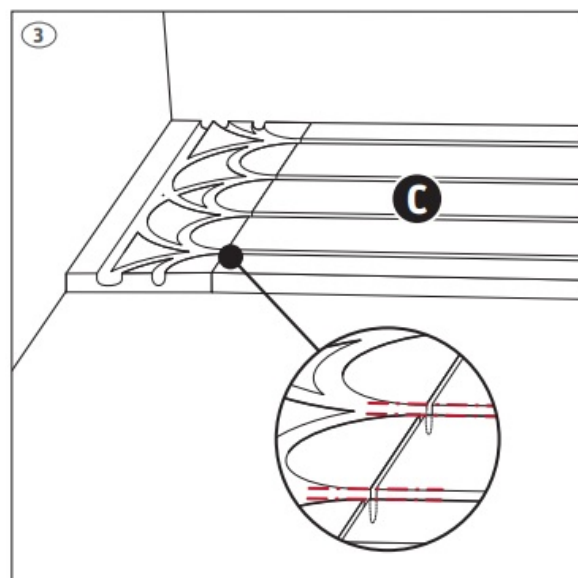


Grooves between plates must be aligned.

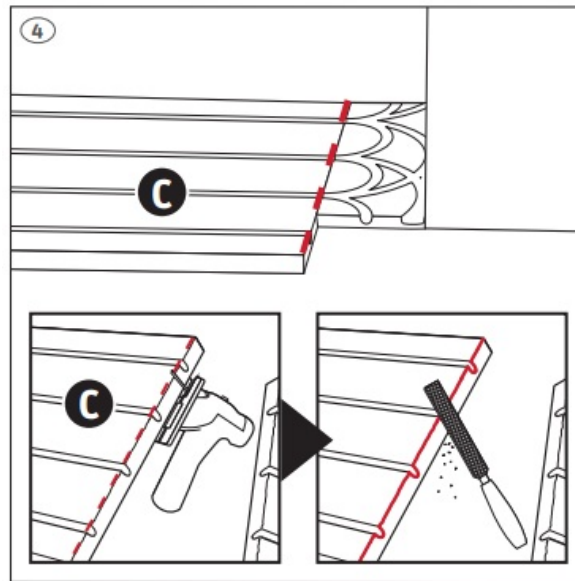


Cut plates from the back, remove any burrs.

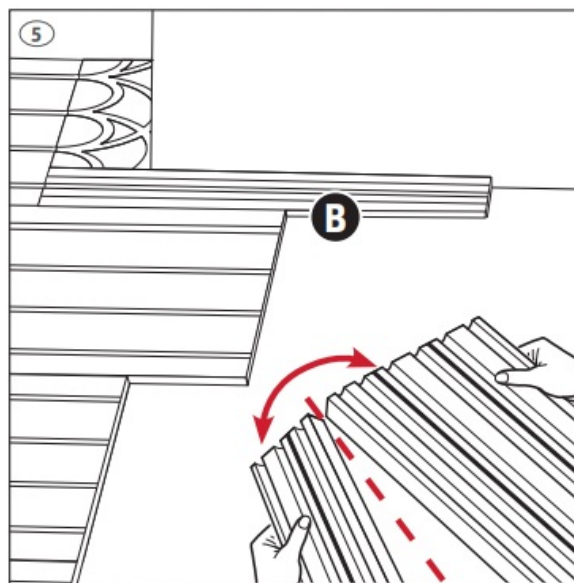


Use transfer plates for feed pipes/to fill gaps.

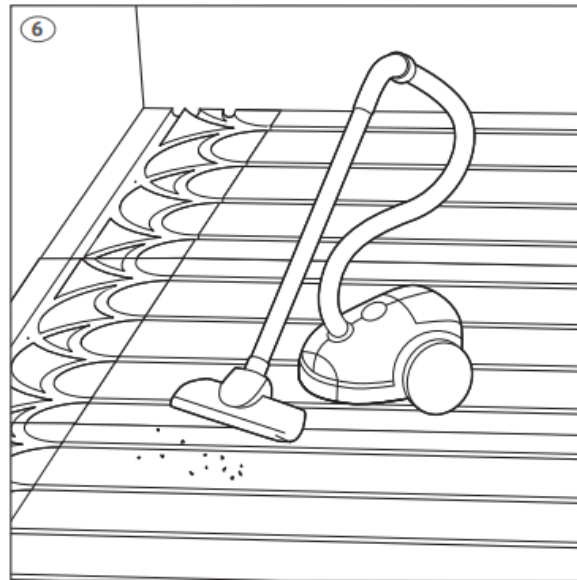


Vacuum before installation of pipes.

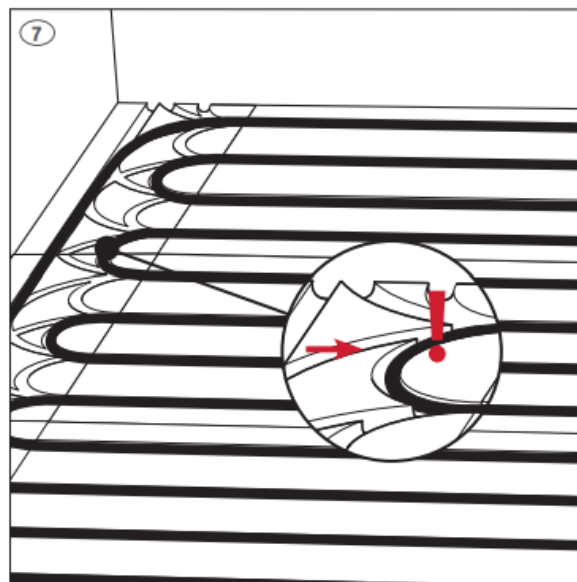


Install pipe tight/close to the inner circle in turns.

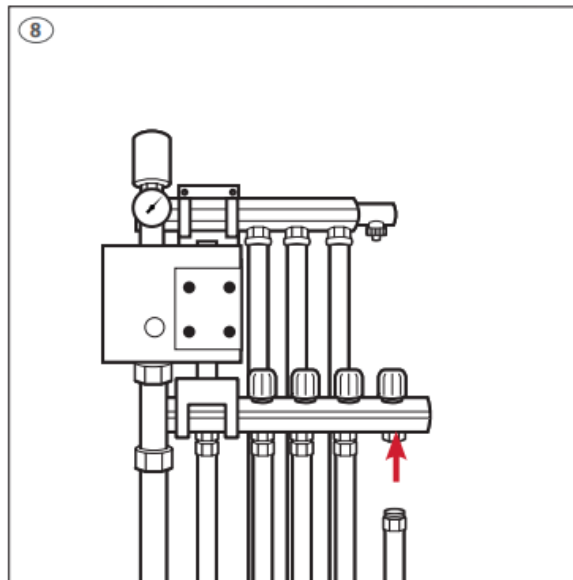


Install pipes and perform pressure test.

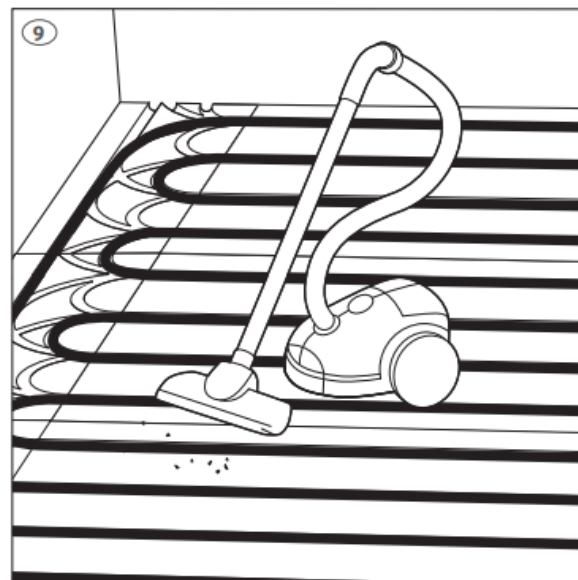

Vacuum before installation of flooring underlayment

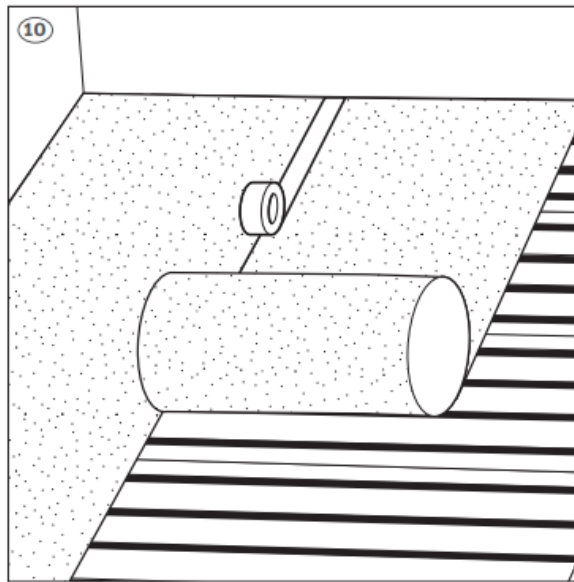

Flooring underlayment. Avoid overlapping.

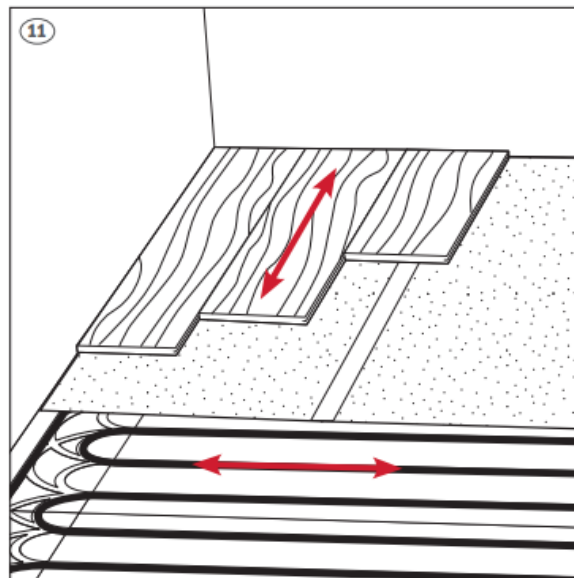

Lay wood floor at a 90° angle to pipes.

- ROTH DANMARK A/S · Tlf. +45 47 38 01 21 ·
 - E-mail: service@roth-danmark.dk · roth-danmark.dk
- ROTH SVERIGE AB · Tel. +46 40 53 40 90 ·
 - E-mail: service@roth-sverige.se · roth-sverige.se
- ROTH NORGE AS · Tel. +47 67 57 54 00 ·
 - E-mail: service@roth-norge.no · roth-norge.no
- ROTH FINLAND OY · Puh. +358 (0)19 440 330 ·
 - S-posti: service@roth-finland.fi · roth-finland.fi
- ROTH UK Ltd. · Phone +44 (0) 1905 453424 ·
 - E-mail: enquiries@roth-uk.com · roth-uk.com

Installation Steps

1. Place component A on a flat surface with dimensions 61 cm x 61 cm.
2. Attach component B to component A using the provided screws (X mm).
3. Ensure that the maximum load of 2mm per meter is not exceeded.
4. Connect component C to the assembly following the designated markings.
5. Secure all components in place as per the assembly diagram.
6. Continue adding components in the specified order until the structure is complete.
7. Check for stability and make adjustments if necessary.
8. Your product is now ready for use!

FAQs

What is the maximum load capacity of the product?

The maximum load capacity is 2mm per meter.


Do I need any additional tools for assembly?

The assembly requires screws (X mm) provided with the product. No additional tools are necessary.

Can the product be disassembled for storage?

Yes, the product can be disassembled following the reverse order of the installation steps.

Documents / Resources



[Roth QuickTemp Compact System \[pdf\]](#) Installation Guide

QuickTemp Compact System, QuickTemp, Compact System, System

References

- [User Manual](#)

📎 Compact System, QuickTemp, QuickTemp Compact System, Roth,

📁 Roth System

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.