



RUN BISON 4-inch color Selectable and Dimmable Flush Mount LED Disk Downlight User Guide


[Home](#) » [RUN BISON](#) » RUN BISON 4-inch color Selectable and Dimmable Flush Mount LED Disk Downlight User Guide 



Item:HT-G2D3D-4C-12W-927-1-511

USE AND CARE GUIDE

4-Inch Color Selectable and Dimmable Flush Mount LED Disk Downlight

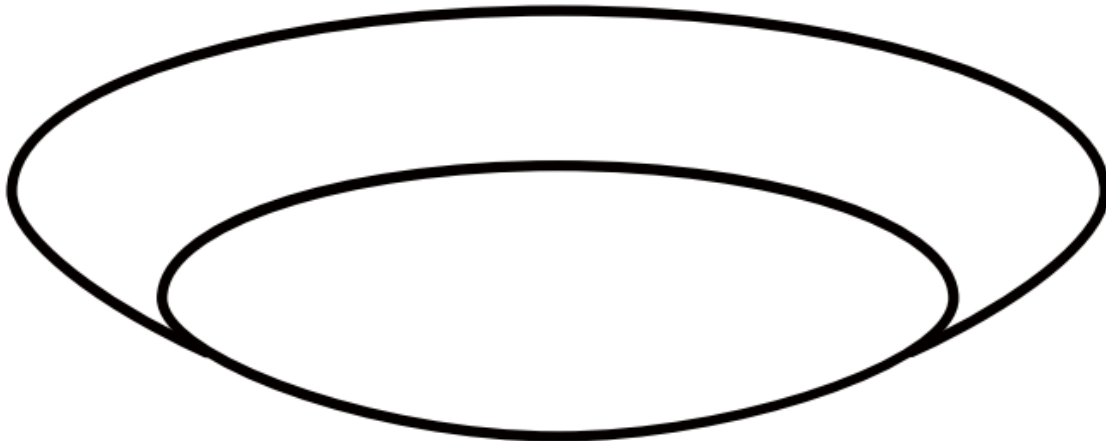


Before returning to your retailer, please contact support@runbisonlighting.com if you have any questions or problems with this product

Contents

- [1 PACKAGE CONTENT](#)
- [2 SAFETY INSTRUCTION](#)
- [3 RECESSED & SURFACE MOUNT INSTALLATION](#)
- [4 DIMMER COMPATIBILITY LIST](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)


PACKAGE CONTENT

Surface Mount for J-Box

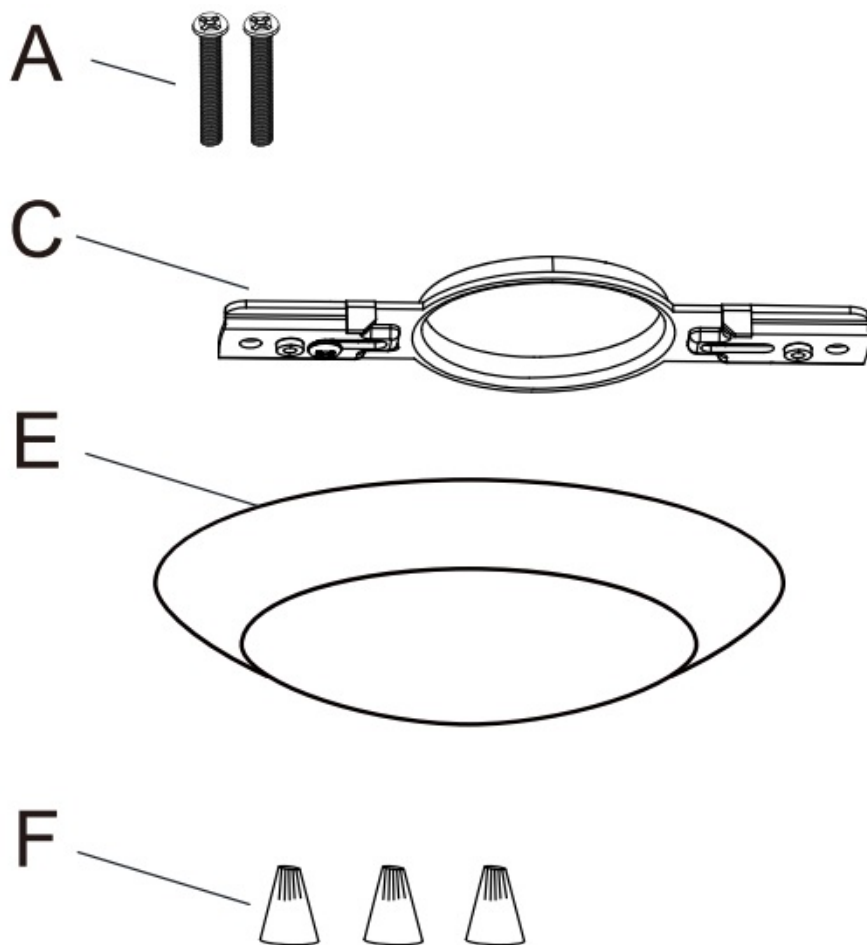

	PARTS	QTY
A	Screws	2
C	Mounting bracket	1
E	Disk lamp	1
F	Wire Nut	3

Recessed Mount for housing

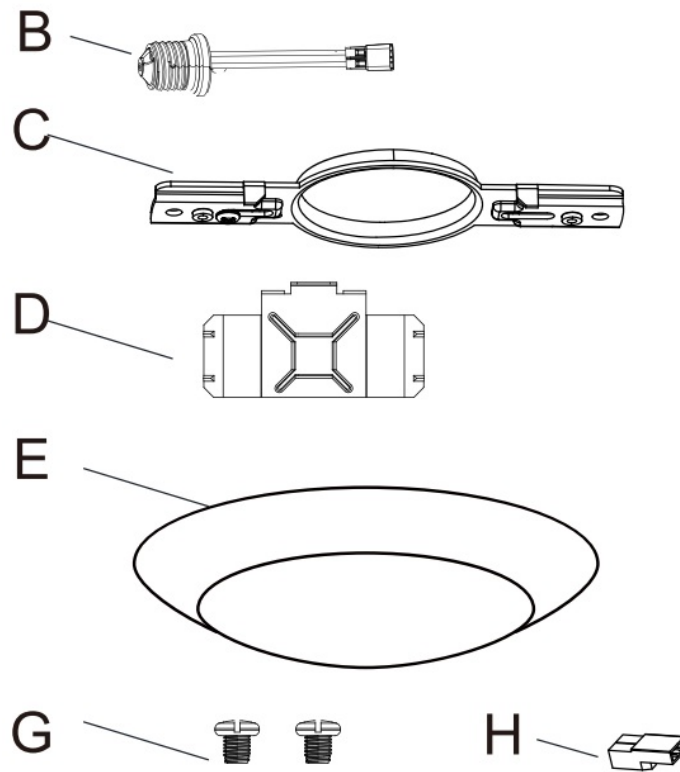

	PARTS	QTY
B	E26 Socket	1
C	Mounting bracket	1
D	Spring Bracket	2
E	Disk lamp	1
G	Screws	2
H	connector	1

WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.

SAFETY INSTRUCTION

Please read and understand all instructions before operating or installing the product. Failure to do so may lead to electric shock, fire, or other injuries that could be hazardous or even fatal.

-Shut off the electricity to the wires that you are working on.

-Do not open, no user-serviceable parts inside. Any changes or modifications and applications not expressly approved by the manufacturer could void the user's authority to operate the equipment and warranty.

WARNING

-Risk of fire or electric shock. LED retrofit kit installation requires knowledge of luminaire electrical systems. Do not attempt installation if not qualified. Contact a qualified electrician

-Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs

and/or drawings.

-Do not exceed the input rating of the luminaire.

-Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

-To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

– This device is not intended for use with emergency exits

– This luminaire has not been modified to operate LED Lamp. Do not attempt to install or operate incandescent lamps or CFLs in this luminaire.


-This retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction.

CAUTION Connect the fixture to a 120v / 60HZ power source. Any other connection voids the warranty. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions 1) this device may not cause harmful interference 2) this device must accept any interference received, including interference that may cause undesired operation.


RECESSED & SURFACE MOUNT INSTALLATION

Option 1: Surface Mounting

1. Use the provided screws (A) to install the mounting bracket (C) to the junction box.

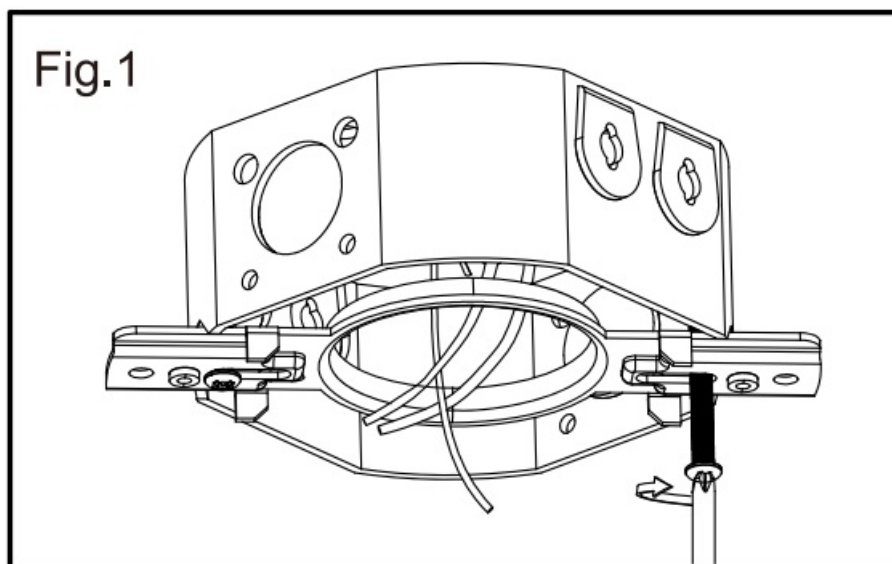

3. Use the toggle switch to select your desired lamp color temperature-soft White (2700K), Warm White (3000K), White (3500K), Cool White(4000K), or Daylight (5000K). Push all the wires and cables into the J-box. Snap the light into the mounting bracket (C) firmly.

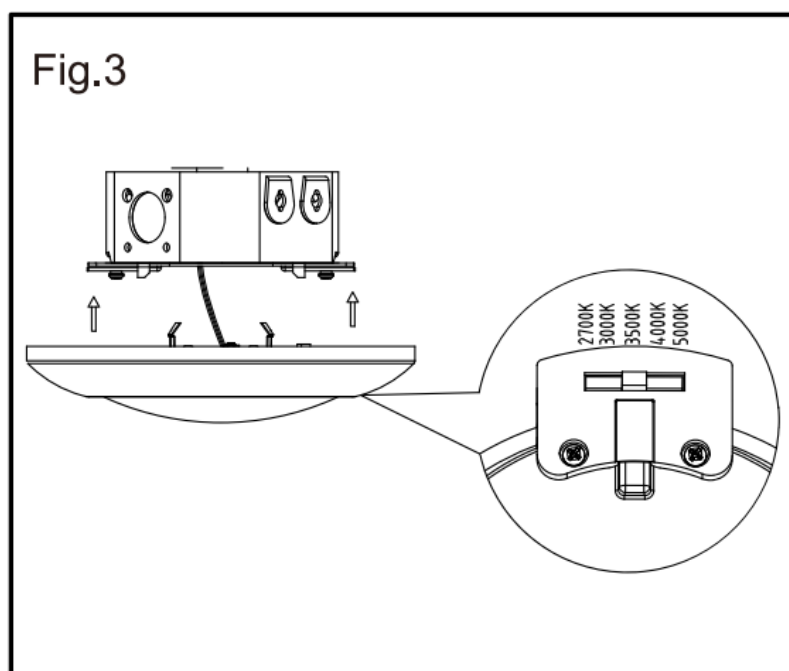


Option 2: Recessed Mount

1. Use the provided screw(G) to mount the spring bracket(D) to the mounting bracket(C).


2. Plug the wire into the connector(H).

Fig.1

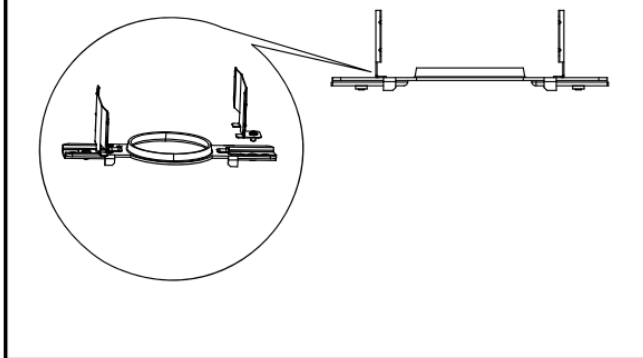


3. Connect the two parts of the connector (B&H) together.

Fig.2

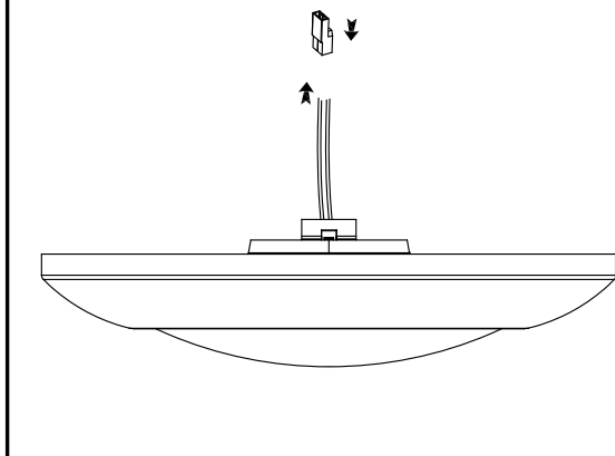


4. Mount the mounting bracket(C) on the disk Light. Use the toggle switch to select your desired lamp color temperature-soft White 2700K), Warm White (3000K), Bright White (3500K), Cool White(4000K), or Daylight (5000K)

Fig.3

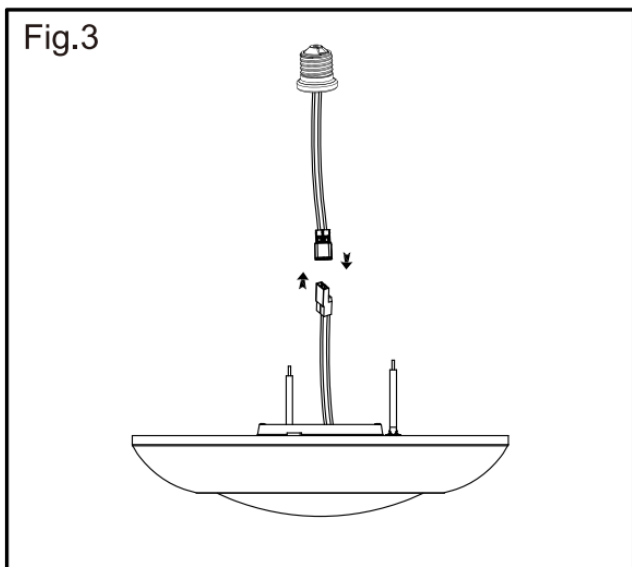

5. Thread the socket adapter (B) Into the socket.

Fig.4

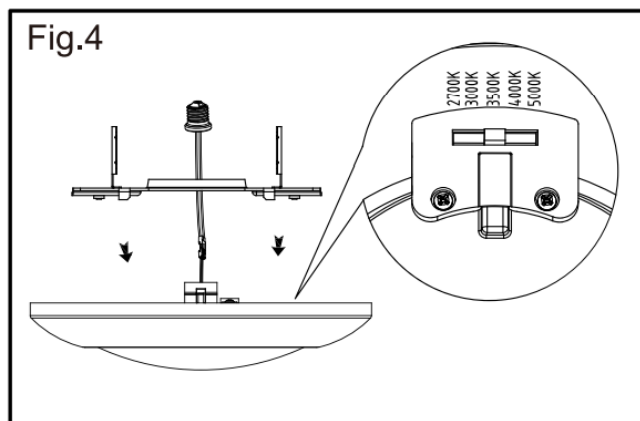

6. Push all the wires into the housing. Snap the disk light into the housing firmly.

Fig.5



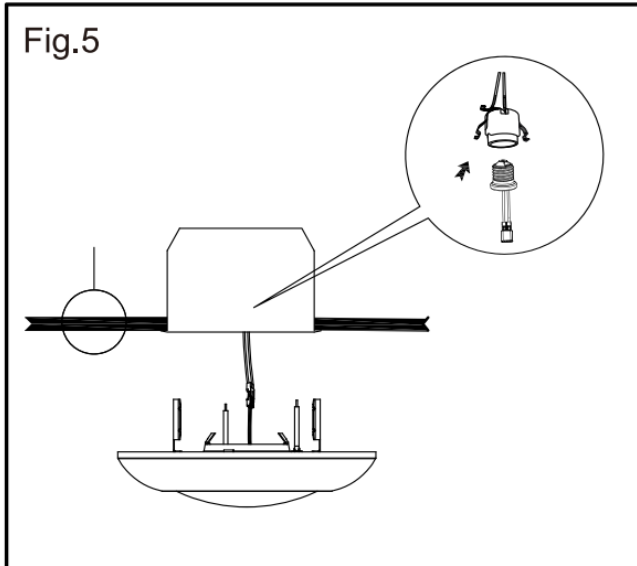


Fig.6

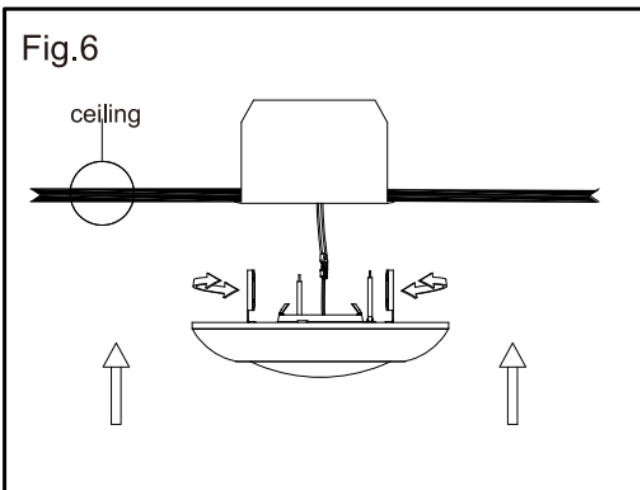

7. Make sure the disk light is secured to complete the installation.

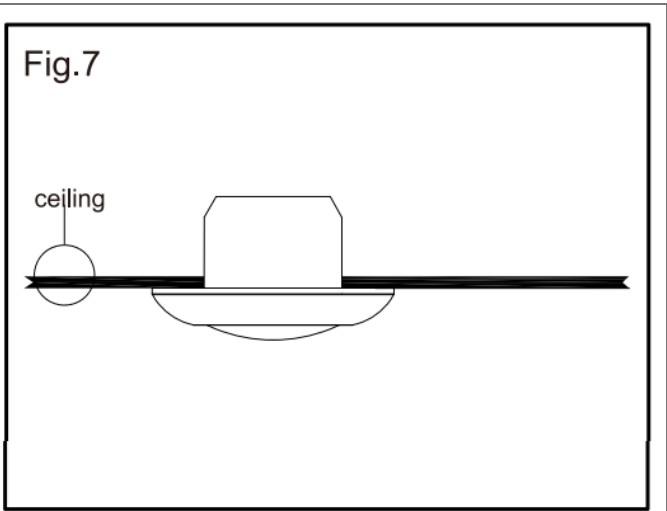

DIMMER COMPATIBILITY LIST

Recommended dimmers

Lutron	Leviton
DVCL-153PR	DVCL-153PR
CTCL-153PDH-WH	CTCL-153PDH-WH
TGCL-153 PH-WH	TGCL-153PH-WH
P-PKGIW=WH-R	P-PKGIW=WH-R

Documents / Resources

	<p>RUN BISON 4-inch color Selectable and Dimmable Flush Mount LED Disk Downlight [pdf]</p> <p>User Guide</p> <p>4-inch color Selectable, Dimmable Flush Mount LED, Mount LED Disk Downlight</p>
--	---