

**SAPPHIRE**

SAPPHIRE TB51 Flexi  
Pipe Adapter



# SAPPHIRE TB51 Flexi Pipe Adapter Installation Guide

[Home](#) » [Sapphire](#) » SAPHIRE TB51 Flexi Pipe Adapter Installation Guide 

## Contents

- [1 SAPHIRE TB51 Flexi Pipe Adapter](#)
- [2 Product Usage Instructions](#)
- [3 Installation Process](#)
- [4 Documents / Resources](#)
  - [4.1 References](#)
- [5 Related Posts](#)

**SAPPHIRE**

**SAPPHIRE TB51 Flexi Pipe Adapter**



## Product Specifications

- **Product Name:** TB51 Flexi Pipe Adapter – 3/8 tubing
- **Compatibility:** Sapphire SL33 or SL33-D
- **Connection:** Cold water supply via braided hose
- **Thread Size:** 3/8 tubing

## Product Usage Instructions

### 1. Installation Process:

- Use plumbers' tape on all the threads as you assemble the connector.
- Screw valve with blue handle into the flexi pipe connector.
- Screw the connector to the flexi pipe cold water line at both] ends.
- Place small nut over white 1/4 tubing and push tubing over the] valve's nozzle. Tighten the nut to secure the tube.
- Adjust water flow rate with handle to 2L/min.
  - Approx. 4L/min = full turn
  - Approx. 2L/min = half turn
- Adjust the flow rate to 2L per min using the red handle.

For more information, visit [sapphirewater.co.nz](https://sapphirewater.co.nz)

## Frequently Asked Questions (FAQ)

### **Q: Can the TB51 Flexi Pipe Adapter be used with other water filtration systems?**


A: The TB51 Flexi Pipe Adapter is specifically designed for use with Sapphire SL33 or SL33-D systems and may not be compatible with other systems. It is recommended to check compatibility before use.

## TB51 Flexi Pipe Adapter – 3/8" tubing

The new TB51 is used in place of the S46 Saddle tapping valve to connect your Sapphire SL33 or SL33-D to the cold water supply via braided hose.


### Installation Process

1. Use plumbers tape on all the threads as you assemble the connector.
2. Screw valve with blue handle into the flexi pipe connector.
3. Screw the connector to the flexi pipe cold water line at both ends.
4. Place small nut over white 1/4" tubing and push tubing over the valves nozzle. Tighten the nut to secure the tube.
5. Adjust water flow rate with handle to 2L/min.
  - Approx. 4L/min = full turn
  - Approx. 2L/min = half turn

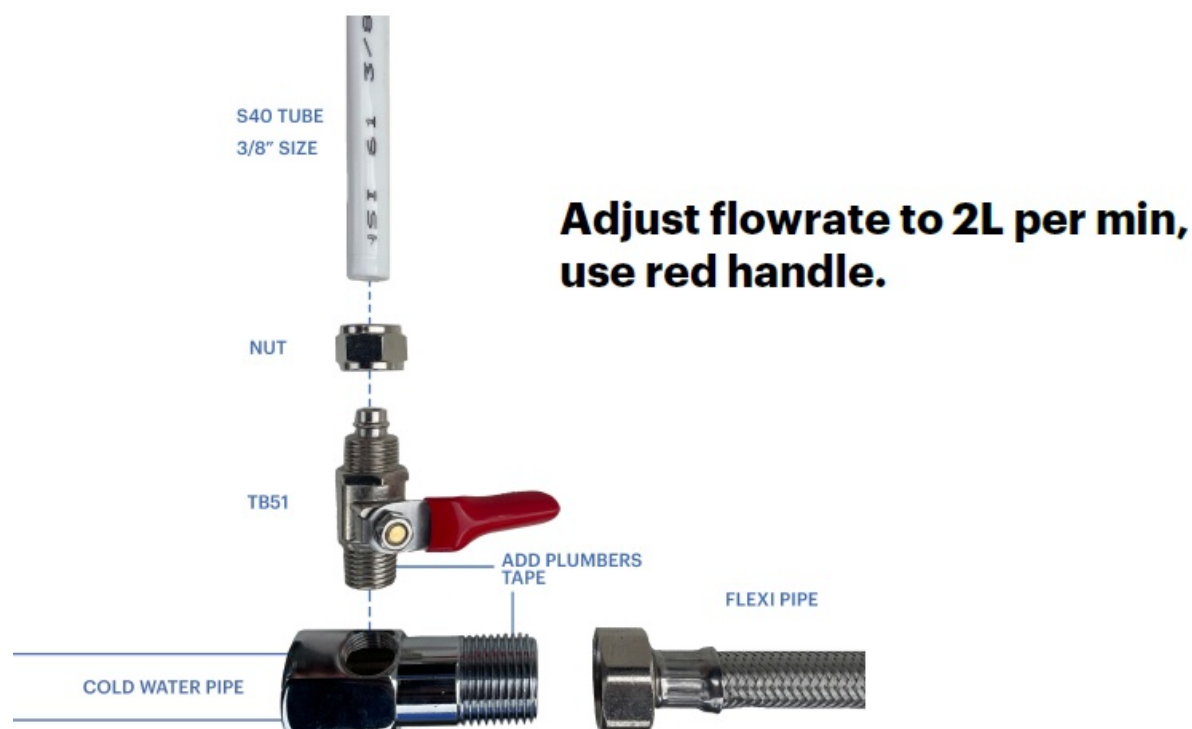

For more information, visit [sapphirewater.co.nz](http://sapphirewater.co.nz)

### Documents / Resources

|   |   |
|---|---|
|  | <p><a href="#">SAPPHIRE TB51 Flexi Pipe Adapter</a> [pdf] Installation Guide<br/>TB51, TB51 Flexi Pipe Adapter, Flexi Pipe Adapter, Pipe Adapter, Adapter</p> |
|---|---|

### References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.