



SC T HAE01 4K60Hz HDMI Audio Extractor with Up/Down Scaler User Manual

[Home](#) » [SC T](#) » SC T HAE01 4K60Hz HDMI Audio Extractor with Up/Down Scaler User Manual 

Contents

- [1 SC T HAE01 4K60Hz HDMI Audio Extractor with Up/Down Scaler](#)
- [2 Introduction](#)
- [3 Features](#)
- [4 Installation View](#)
- [5 MENU](#)
- [6 Panel View](#)
- [7 Trouble Shooting](#)
- [8 Specification](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)



SC T HAE01 4K60Hz HDMI Audio Extractor with Up/Down Scaler



Model : HAE01
4K60Hz HDMI Audio Extractor with Up/down Scaler

Introduction

HAE01 is an HDMI multifunctional tool allowing you to extract HDMI audio to integrate external audio equipment,

such as amplifiers, AV receivers, etc. Additionally, the up/down scaling function, which converts 1080p signal to 4K, or 4K signal to 1080p, allows you to save extra cost on a new HDMI monitor. Last but not least, the 5-way joystick switch can enable you to operate and setup functions efficiently.


Features

- Resolution up to 4K@60Hz 4:4:4. Built-in dual HDMI outputs.
- Built-in Toslink (digital audio) and 3.5mm phone jack (analog audio) interfaces.
- Supports resolution up/down scaling function.
- Supports chroma resampling function, 4K HDMI 4:4:4/ 4:2:2 to 4:2:0 conversion.
- Supports HDCP 2.2 to 1.4 conversion.
- Supports HDMI audio extract for integrating with external audio equipment.
- Supports OSD menu to check functions & modes.
- Supports EDID management.

Installation View


Application 1

4K HDMI Audio Extrator

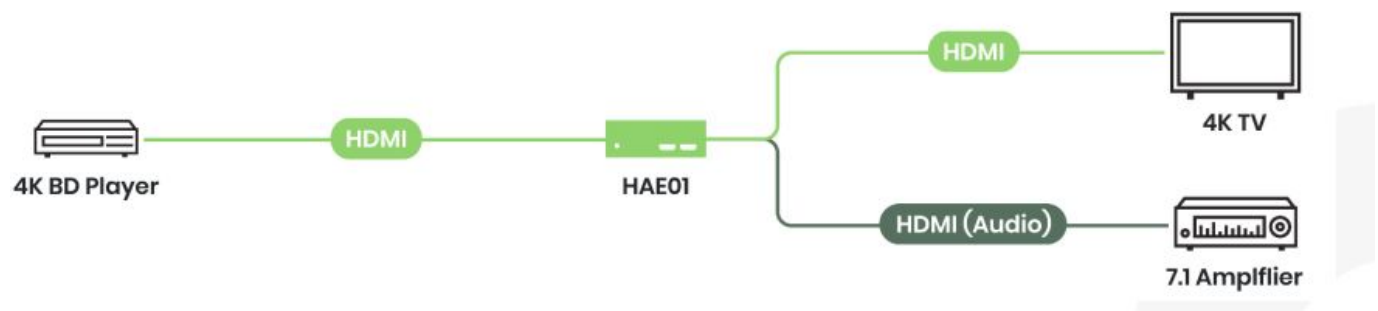


Application 2

4K HDMI Up/Down Scaler with Audio Extractor HDCP 2.2 to 1.4 and 4:4:4 to 4:2:0 and Up/Down Scale Capable Full OSD operation for all setup/EDID management

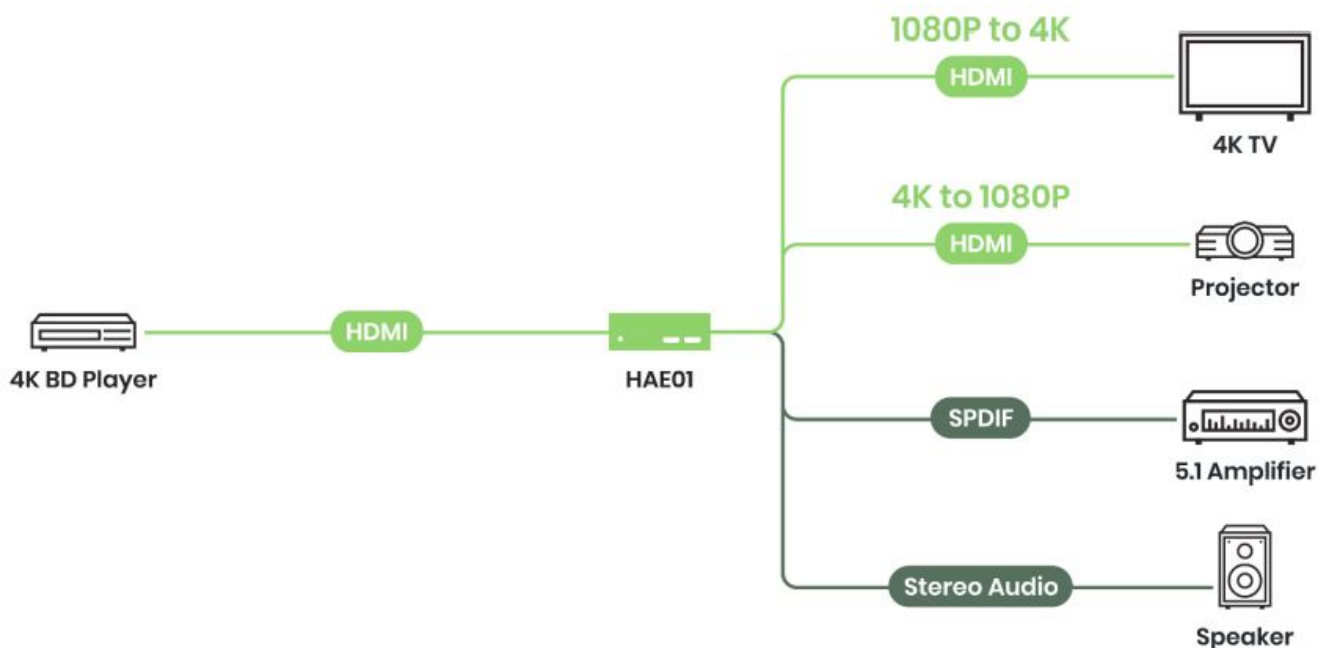

5 way Joystick Switch Function



MENU Operation

SWI	Function
	Up
	Down
	Left
	Right
	confirm


MENU

Main Menu	Sub Menu	Sub Menu Function
OUTPUT 1 MODE	NORMAL	Output video same as input Video
	UPSCALE	1080P Upscale to 4K
	EXIT	Exit Sub Menu
OUTPUT 1 SUBSAMPLING	NORMAL	Output color subsampling same as Input
	4:4:4 à 4:2:0	4K6G 4:4:4/4:2:2 convert to 4K3G 4:2:0
	NORMAL	Output color subsampling same as Input
	OUTPUT 1 AUDIO MODE	Audio Selection

OUTPUT 1 AUDIO MODE	NORMAL	audio output
	MUTE	No audio output
	EXIT	Exit Sub Menu
OUTPUT 2 MODE	AUDIO ONLY	Audio output only
	DOWNSCALE	4K downscale to 1080P
	SPLITTER	Distribution Mode Output signal same as OUTPUT 1
	EXIT	Exit Sub Menu
EDID(VIDEO)	AUTO	Use OUTPUT 1 EDID as priority, if OUTPUT 1 and OUTPUT 2 not connected with TV, Default as 4K
	OUTPUT 1	Use OUTPUT 1 EDID
	OUTPUT 2	Use OUTPUT 2 EDID
	PRESET 4K	Default 4K 60Hz 8bit
	PRESET 1080P	Default 1080P 60Hz 8bit
	EXIT	Exit Sub Menu


EDID(AUDIO)	AUTO	Use OUTPUT 2 as priority, If OUTPUT 1 and OUTPUT 2 not connected with TV, Default as LPCM 2.0
	OUTPUT 1	Use OUTPUT 1 EDID
	OUTPUT 2	Use OUTPUT 2 EDID
	MULTI	Default AC3 and DTS Audio format
	LPCM 7.1CH	Default LPCM 7.1 CH Only
	LPCM 2CH	Default LPCM 2CH Only
	EXIT	Ext Sub Menu
MISCELLANEOUS	Main MCU : Vx.xx	Show firmware version
EXIT		Exit MENU

Panel View

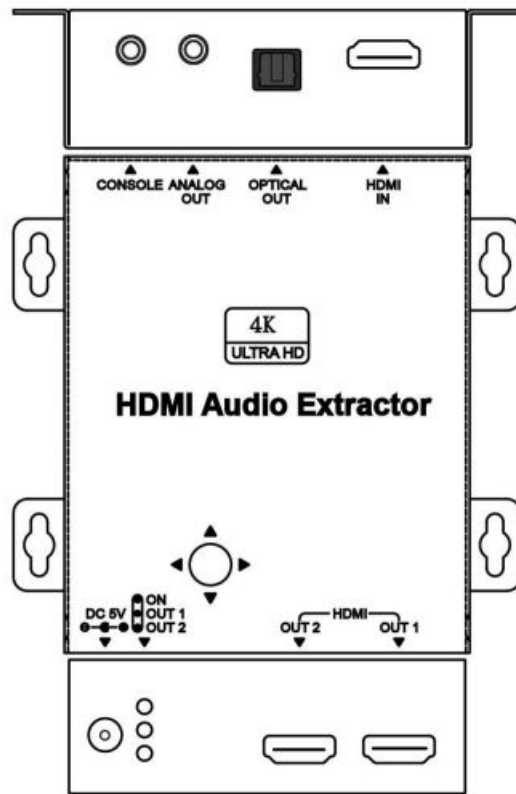

LED Indication

Color	LED
GREEN	Power
BLUE	Output 1
RED	Output 2

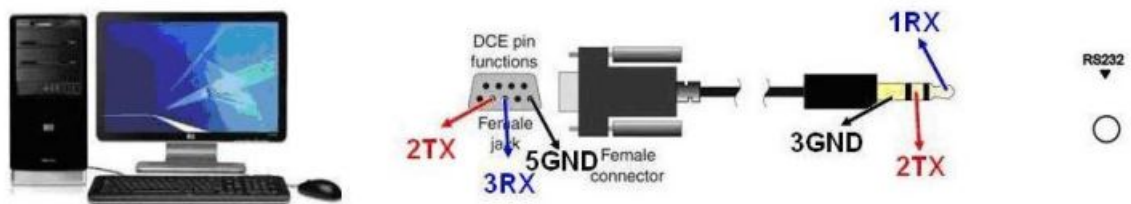

DB9(F)/3.5mm STEREO PHONE JACK DB9(F)/3.5mm STEREO PHONE JACK

RS232		3.5 mm Phone Jack	
Footprint	Define	Footprint	Define
Pin 2	TX	Pin 1	RX
Pin 3	RX	Pin 2	TX
Pin 5	GND	Pin 3	GND

Trouble Shooting

1. CEC function only works Output 1.
2. Any HDMI output with HDCP2.2 compatible issues will cause HDMI no video output, Under HDCP 2.2 mode: any one monitor HDCP authorization failed will cause no video status, other connecting monitors will be also failed. Then monitor testing must be one by
3. Up/down scale mode only support resolution conversion, frequency will be not changed.
4. Under HDMI 2.0 mode, must use Premium certified HDMI cable.

HAE01 Package Include

HAE01 x 1 pcs


DC5V 1Amp Power Adapter x 1 pcs

DB9 (0F)/3.5mm STEREO PHONE JACK x 1 pcs Mounting Screw pack x 2 bags

Specification

ITEM NO.	HAE01
Support	
Compliance	HDMI 2.0, HDCP 2.2, 3D, HDR
Max. Video Resolution	4K@60Hz 4:4:4
Video Bandwidth	18 Gbps
Audio Format	7.1 LPCM 192KHz, Dolby TrueHD, DTS-HD MA
Ports & Interfaces	
Video Input	1 x HDMI Type A
Video Output	2 x HDMI Type A
Digital Audio	1 x TOSLINK
Analog Audio	1 x (3.5mm) Phone Jack
RS232 Interface	1 x DB9 Female / 3.5mm Stereo Phone Jack (Firmware Update)
Power	
Power Supply	DC 5V 1A Regulated
Power Consumption	4W
Ambient Temperature	
Operation	-10 to 45°C
Storage	-30 to 70°C
Humidity	Up to 95%
Physical Characteristics	
Dimensions	109.6 x 110.5 x 36mm
Weight	270g

Documents / Resources

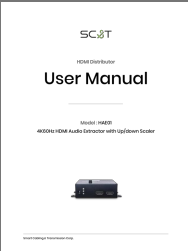	SC T HAE01 4K60Hz HDMI Audio Extractor with Up/Down Scaler [pdf] User Manual HAE01, 4K60Hz HDMI Audio Extractor with Up Scaler, 4K60Hz HDMI Audio Extractor with Down Scaler
---	---