



# Schreder Tflex Module Instruction Manual

[Home](#) » [Schreder](#) » Schreder Tflex Module Instruction Manual 

## Contents

- 1 Schreder Tflex Module
- 2 INSTALLATION INSTRUCTIONS
- 3 REMOTE MOUNTING
- 4 FIXED BRACKETS
  - 4.1 SUSPENDED SWIVELING FIXATION, PULL OUT
- 5 WALL SWIVELING FIXATION, ADJUSTABLE
- 6 SAFETY INSTRUCTIONS
- 7 Documents / Resources
- 8 Related Posts

# Schröder

Schreder Tflex Module





INSTALLATION INSTRUCTIONS

SYMBOLS




IP	IK
66/69	10


A



A1	391 mm
	15.3 in
A2	780 mm
	31 in
A3	1170 mm
	46 in
B	385 mm
	15 in
C	70 mm
	3 in

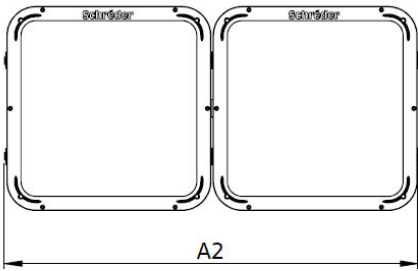


kg/lb	1OB	8 kg
		17.6 lb
	2OB	15 kg
		33.06 lb
	3OB	23 kg
		50.70 lb

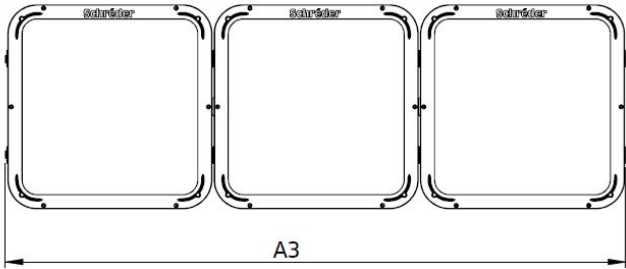


REMOTE MOUNTING

B

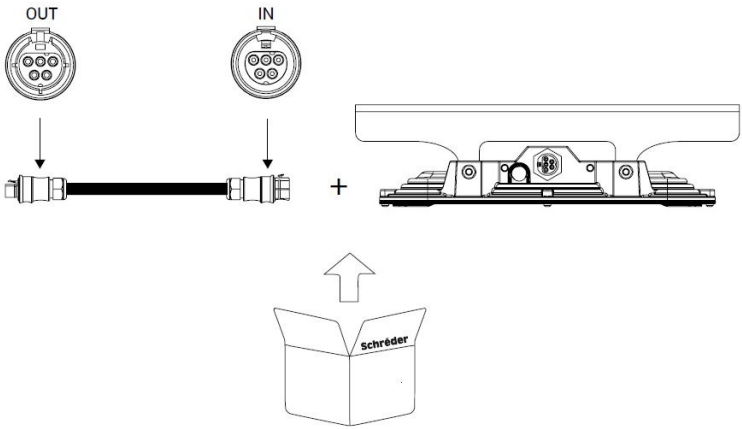


5P CONNECTOR	
CONNECTOR PIN#	
1	Circuit 1
2	
3	Circuit 2
4	
5	Earth

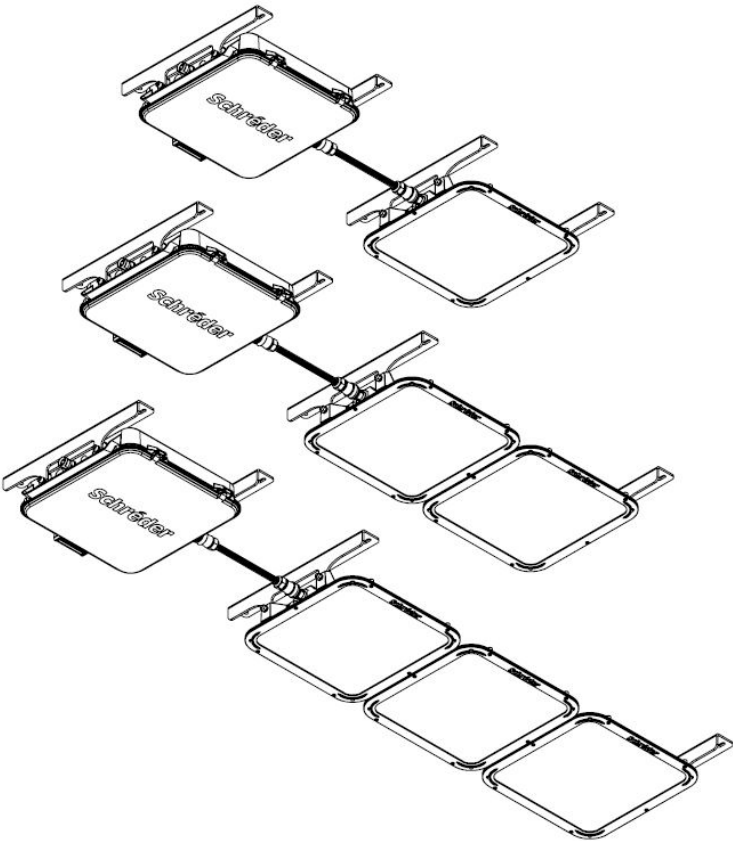

**FIXED BRACKETS**

1

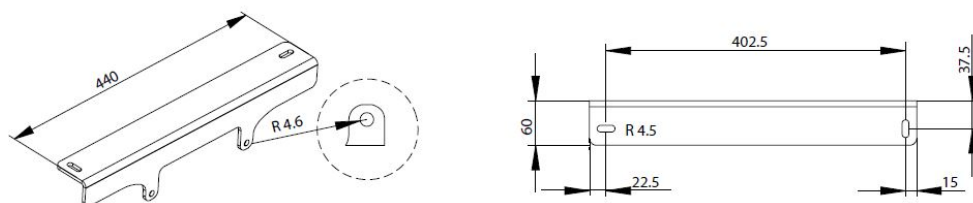







2

A1	383 mm 15 in
A2	772 mm 30 in
A3	1161 mm 46 in
A3 (ANSI 3G)	1161 mm 46 in




B	402.5 mm 15.8 in
---	---------------------

C	117 mm 4.56 in
---	-------------------

kg/lb	10B	8 kg 17.6 lb
	20B	15 kg 33.06 lb
	30B	23 kg 50.70 lb

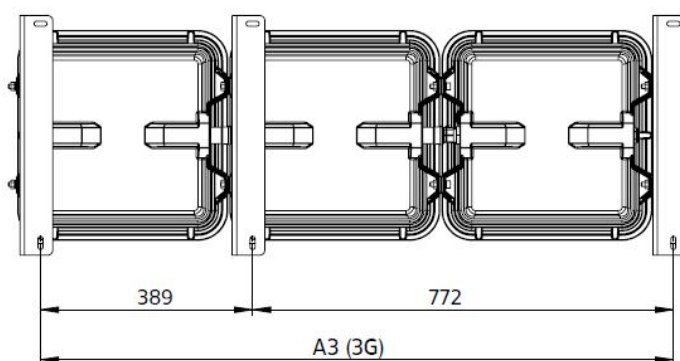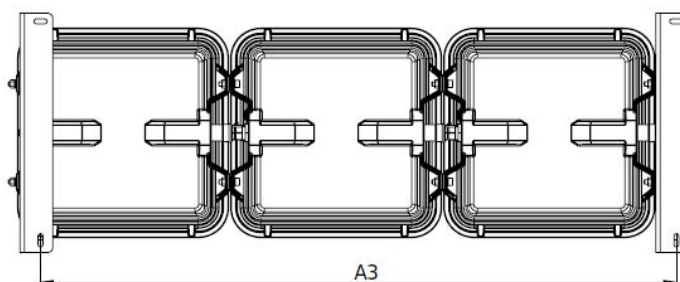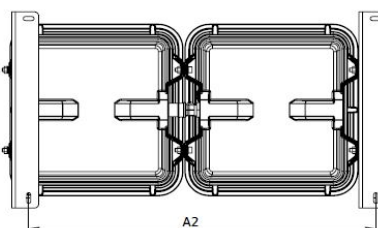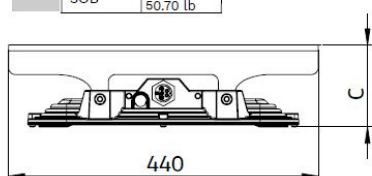



**SUSPENDED SWIVELING FIXATION, PULL OUT**

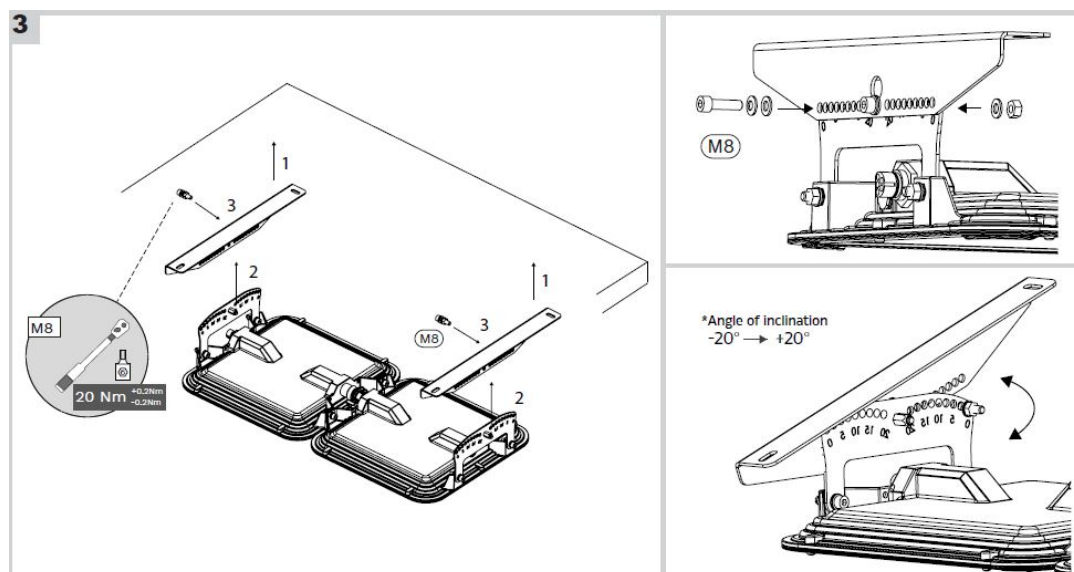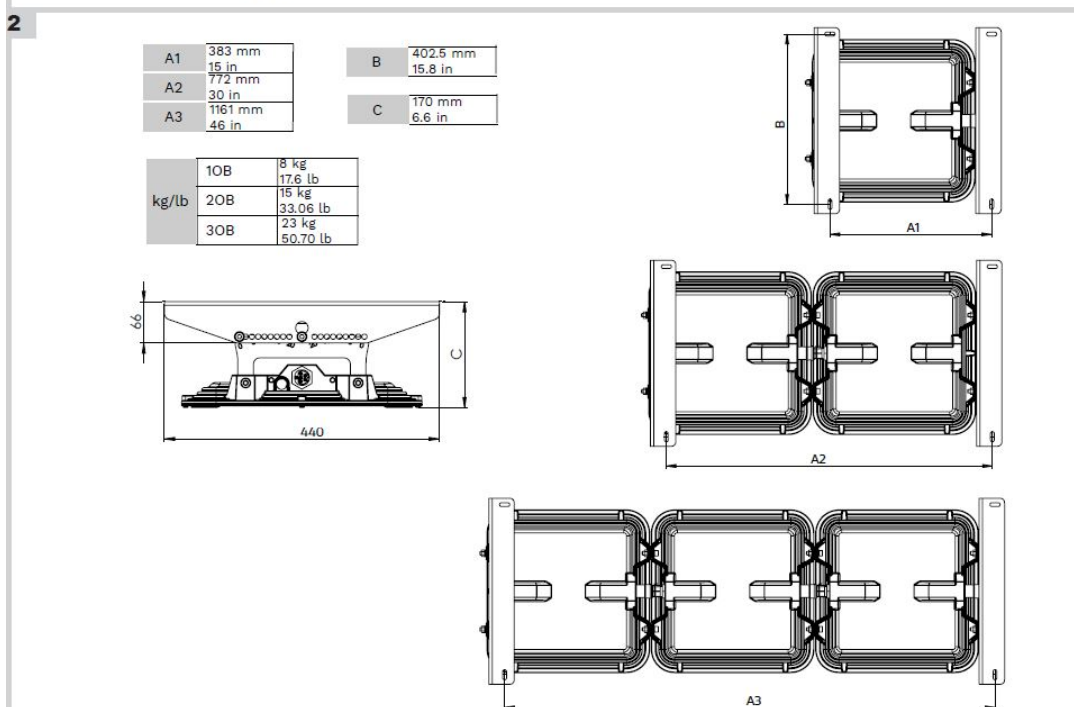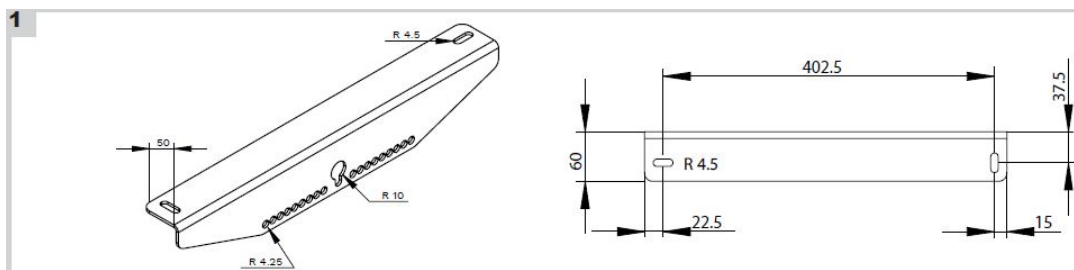

## SUSPENDED SWIVELING FIXATION, ADJUSTABLE





1

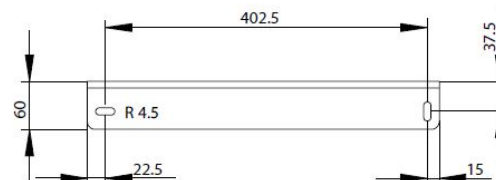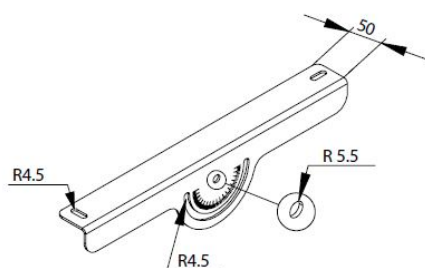




2

A1	383 mm 15 in	B	402.5 mm 15.8 in
A2	772 mm 30 in	C	190 mm 6.6 in
A3	1161 mm 46 in		


kg/lb	10B	8 kg 17.6 lb
	20B	15 kg 33.06 lb
	30B	23 kg 50.70 lb

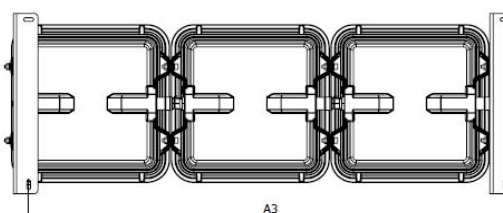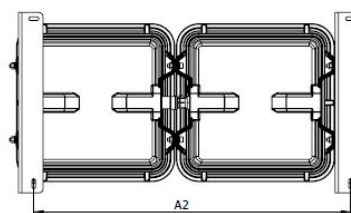



3

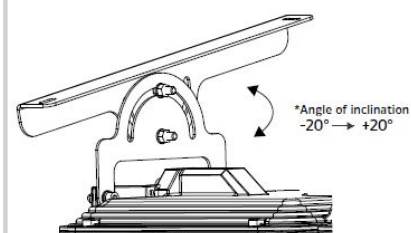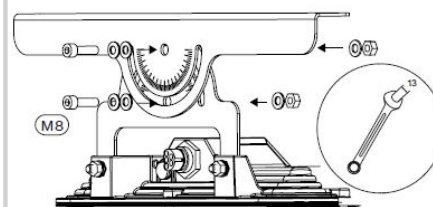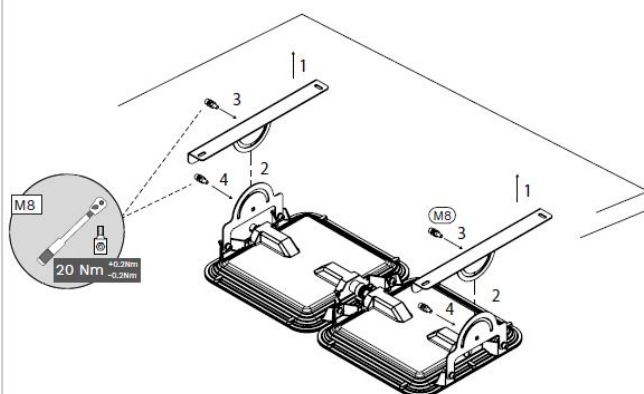

WALL SWIVELING FIXATION, PULL OUT

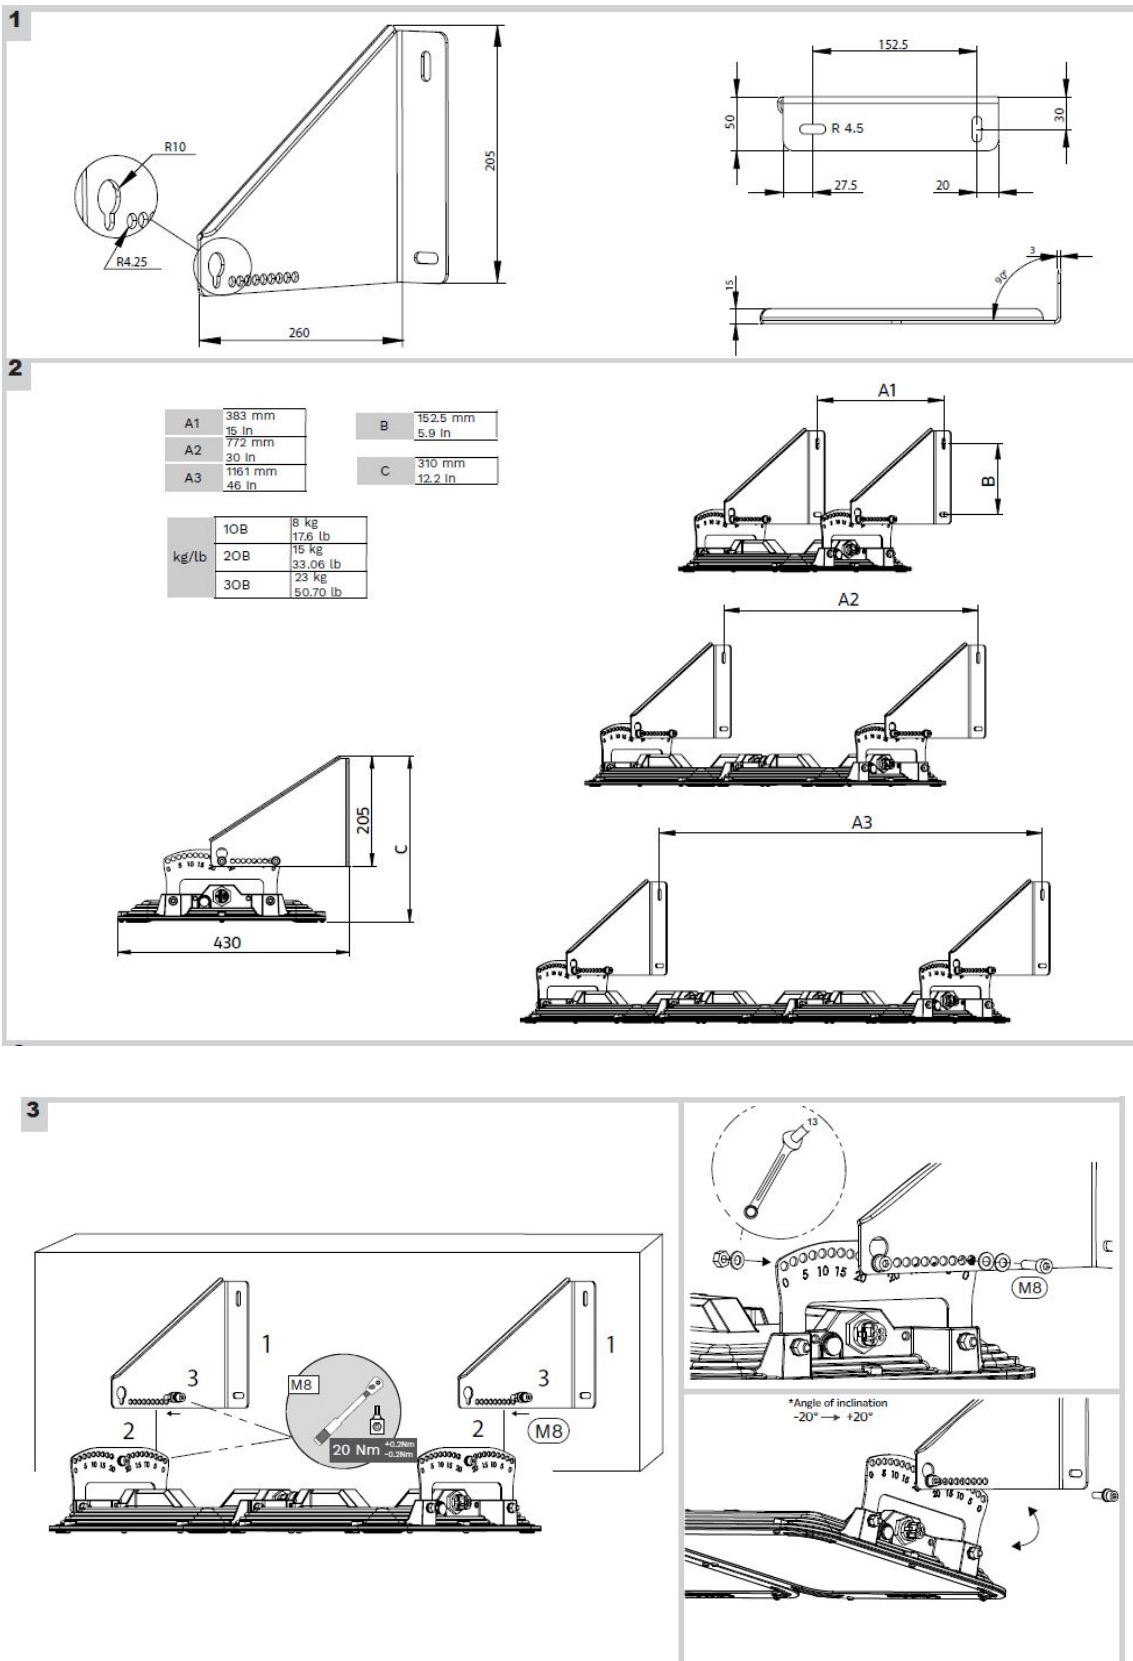


## WALL SWIVELING FIXATION, ADJUSTABLE

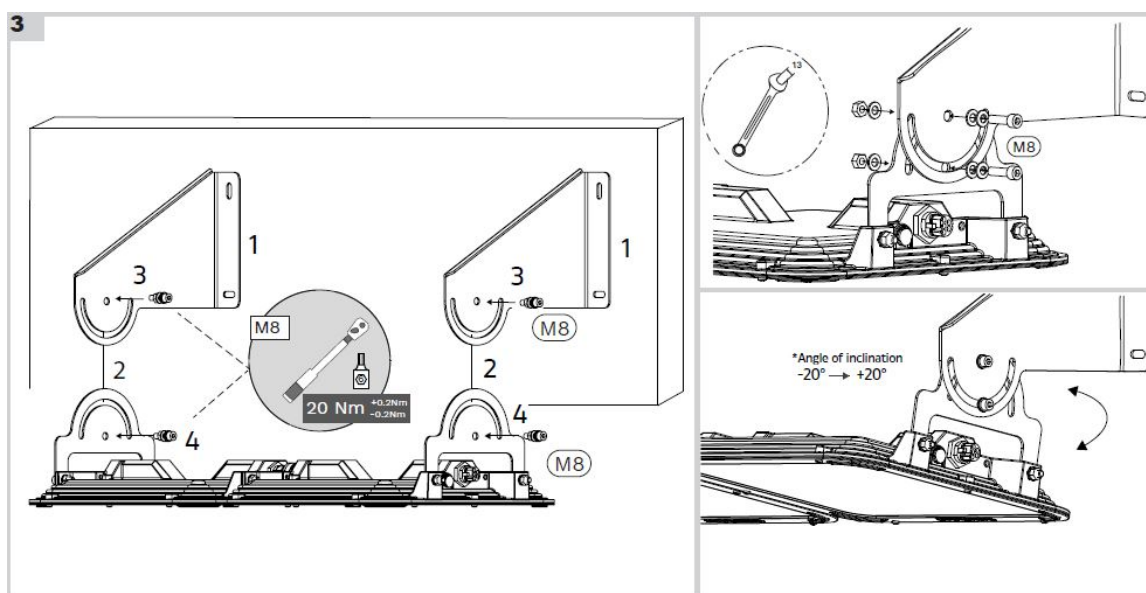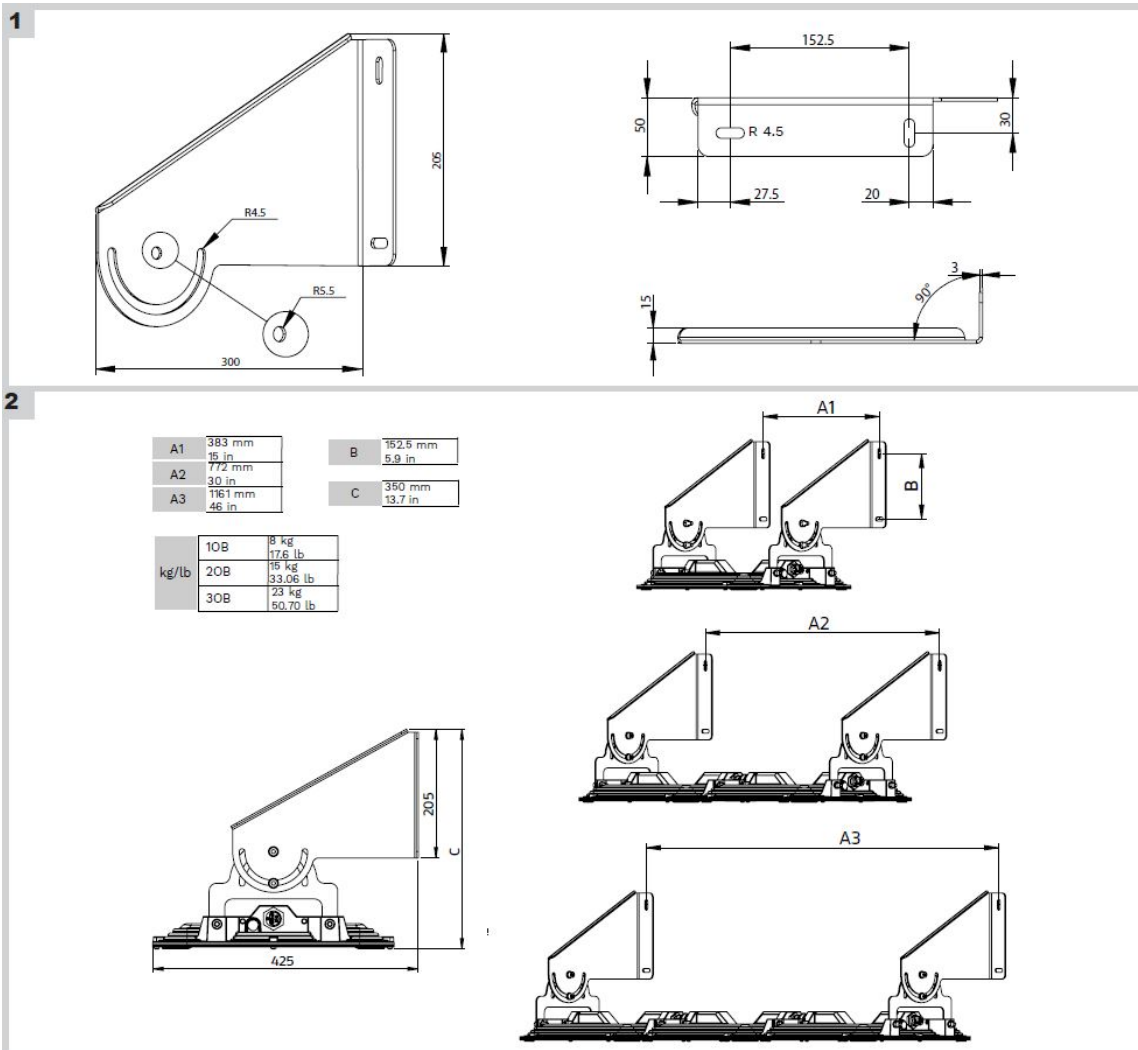


## HOOK FIXATION



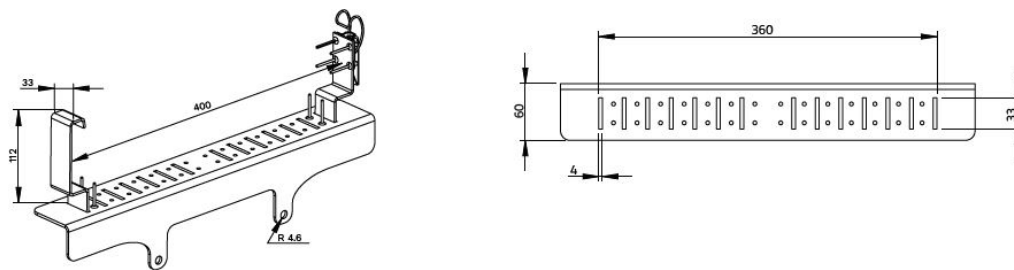

Adjust hooks following cable tray size W100 – 400mm for standart version and 100-400 mm for custom or studio request.

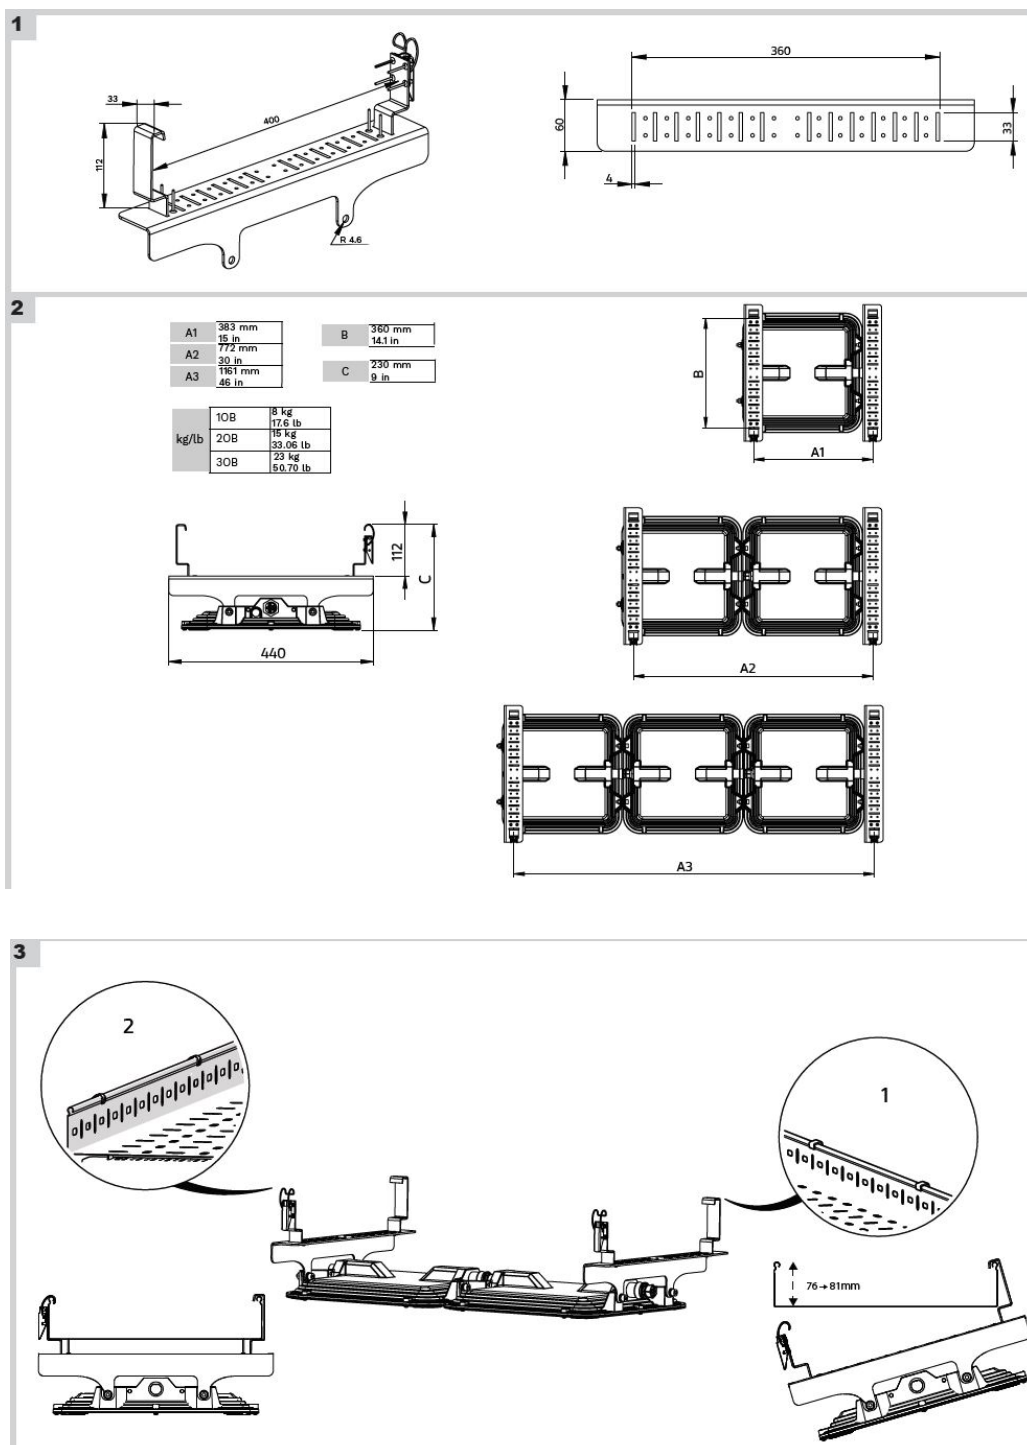

## SAFETY INSTRUCTIONS

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a

similar qualified person.

Always switch off the power prior to installation, maintenance or repair activities.

RISK GROUP 2 – CAUTION! Hazardous optical radiation may be emitted from this product. Do not stare at the luminaire when operating as it may be harmful to the eyes. The luminaire should be positioned so that prolonged staring at the luminaire at a distance of less than 0.77m is not expected.


This product contains a light source of an energy efficiency class G or higher.

In case of PVC insulated mains cable, the installer

MUST ensure that the WHOLE cable is protected against climatic conditions, especially

UV rays and rain, by making sure that the cable is contained inside the luminaire and pole


Y-connection: In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

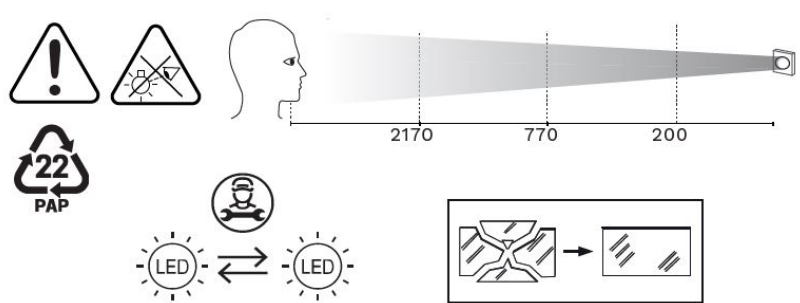

[www.schreder.com](http://www.schreder.com)

Copyright © Schröder S.A. 2022 – Executive Publisher: Stéphane Halleux – Schröder International Services sa – B-4000 Liège, Rue de Mons 3 (Belgium) – The information, descriptions and illustrations herein are only of an indicative nature and subject to changes without notice.

## Documents / Resources

	<p><a href="#">Schréder Tflex Module</a> [pdf] Instruction Manual Tflex Module, Tflex, Module</p>
---	---