



## **SCHUBERTH SC2 Sena Motorcycle Intercom with Remote Control Instruction Manual**


[Home](#) » [SCHUBERTH](#) » SCHUBERTH SC2 Sena Motorcycle Intercom with Remote Control Instruction Manual 




# **SCHUBERTH**

**SC2 Sena Motorcycle Intercom with Remote Control  
Instruction Manual**

## SC2

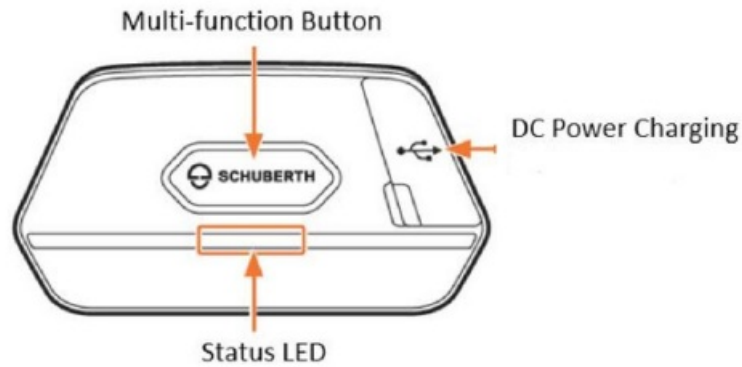

## SC2 Remote Control

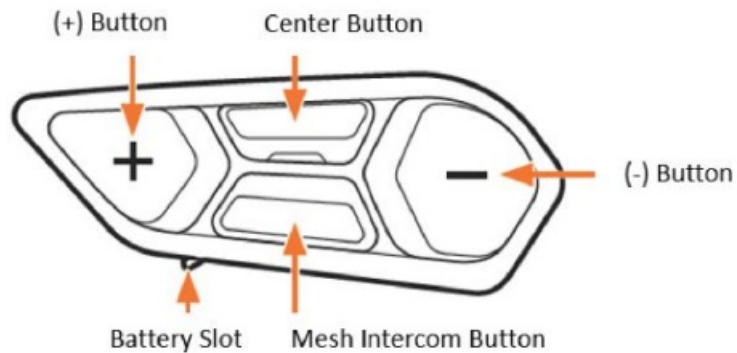

### Charging

#### SC2

**Red LED: Charging**

**Blue LED: Fully charged**

### Power On/Off

#### SC2

Press and hold the Multifunction Button for 1 second

### SC2 Remote Control

Tap the Center Button


Note: The SC2 and the SC2 Remote Control come paired together. They will automatically connect to each other when the SC2 and the SC2 Remote Control are powered on.

### Volume Adjust menu

(+) Button – Increase the volume

(-) Button – Decrease the volume

### Battery Check

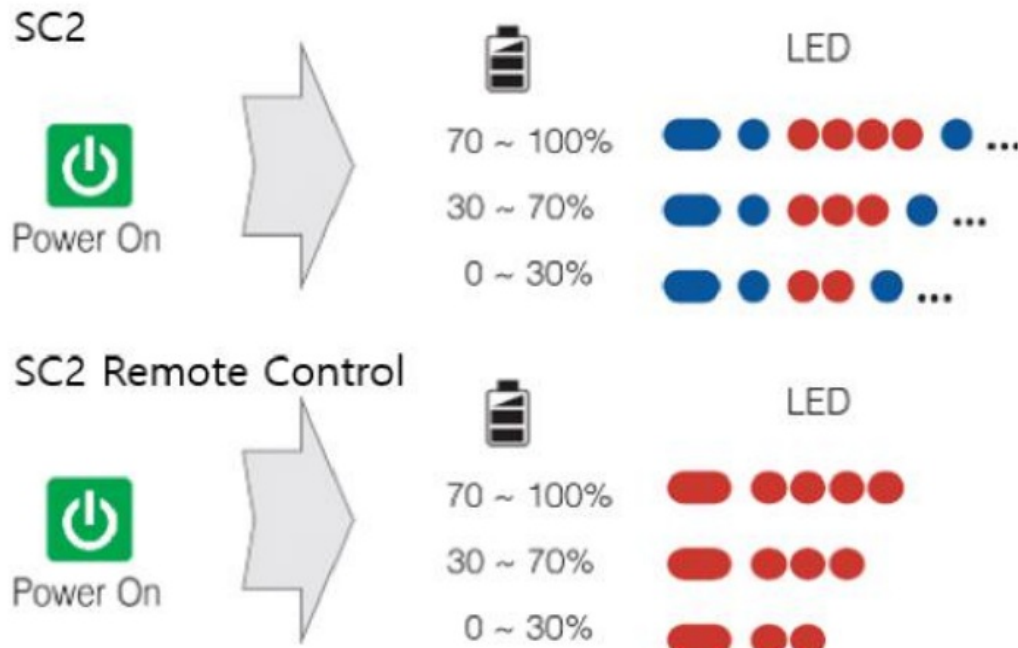

## Phone, Music Pairing

1. Press the Center Button for 10 seconds.
2. Press the (+) Button to enter into Phone Pairing
3. Search for Bluetooth devices on your mobile phone. Select the SC2 in the list of the devices detected on the mobile phone.
4. Enter 0000 for the PIN. Some mobile phones may not ask for the PIN.

## Music Operation

Play or pause music: Press the Center Button for 1 second.

Trackback: Press the (-) Button for 1 second.

Track forward: Press the (+) Button for 1 second.

## Mobile Phone Call Making and Answering

Answering a call: Tap the Center Button

Ending a call: Press the Center Button for 2 seconds.

Voice dial: Press the Center Button for 3 seconds.

Speed dial: Press the (+) Button for 3 seconds.

Rejecting a call: Press the (+) Button for 2 seconds.

## Contents

- [1 Intercom](#)
- [2 Troubleshooting](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

## Intercom

Intercom Pairing 1. Press and hold the Center Button of two headsets for 5 seconds until red LEDs of both units start to flash rapidly.

2. The SC2 will automatically pair with a Sena headset

Intercom Start/End: Tap the Center Button

### **Mesh Intfrom**

Mesh Intercom On/Off: Tap the Mesh Button

### **Radio On/ Off**

Turn on the FM radio: Press the (-) Button for 1 second. Turn off the FM radio: Press the (-) Button for 1 second.

### **Radio Scan Up FM Band**

Start scanning: Press (+) Button for 1 second. Stop scanning: Press the (+) Button for 1 second.

### **Radio Seek Stations**

Seek up stations: Double-tap the (+) Button. Seek down stations: Double-tap the (-) Button.

### **Setting**

Configuration Menu: Press the Center Button for 10 seconds.

## **Troubleshooting**

### **SC2 Factory Reset**

If you want to restore the SC2 to factory default settings, press and hold the Multi-function button for 12 seconds. The SC2 automatically restores the default settings and turns them off.

### **SC2 Remote Control Factory Reset**

If you want to restore the SC2 Remote Control to factory default settings, press and hold the (+) Button and (-) Button and Center Button for 1 second. The SC2 Remote Control automatically restores the default settings and turns them off.

### **Certification and Safety Approvals FCC Compliance Statement**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antennae
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **FCC RF Exposure Statement**


This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End-users must follow the specific operating instructions for satisfying RF exposure compliance. The antenna used for this transmitter must not transmit simultaneously with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures. When equipped, the distance between the antenna and one's head surface is 58mm.

### **FCC Caution**

Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Industry Canada(IC) Statement This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

## **Documents / Resources**



[SCHUBERTH SC2 Sena Motorcycle Intercom with Remote Control](#) [pdf] Instruction Manual  
SP102, S7A-SP102, S7ASP102, SC2 Sena Motorcycle Intercom with Remote Control, SC2, Se  
na Motorcycle Intercom with Remote Control