



Sciener G2 Smart Lock Gateway User Manual

[Home](#) » [Sciener](#) » Sciener G2 Smart Lock Gateway User Manual 

Sciener G2 Smart Lock Gateway



Contents

- [1 SMART LOCK GATEWAY G2](#)
- [2 Light Status](#)
- [3 Pair The Gateway With APP](#)
- [4 Limited Warranty](#)
- [5 FCC Statement](#)
- [6 Disclaimer](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

SMART LOCK GATEWAY G2

Model : G2

Dimensions : 70mm x 70mm x 26mm


Network : WiFi 2.4G

IEEE standard : 802.11 b/g/n

Power interface : Type-C USB

Power input : 5V/500mA

Light Status

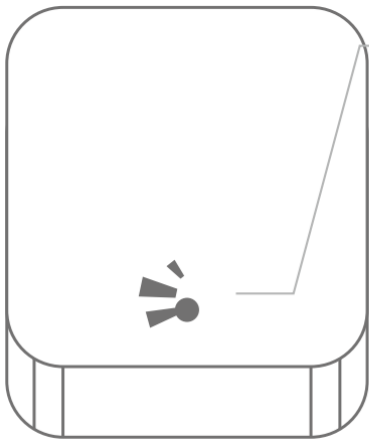

When the Gateway is powered on:



Flashing Red/Blue lights:
Stand-by mode - Ready to Pair



Blue light: Normal mode





Red light: Network failure

Pair The Gateway With APP


1. Open the APP




2. Touch the “≡” icon on the top left of the screen

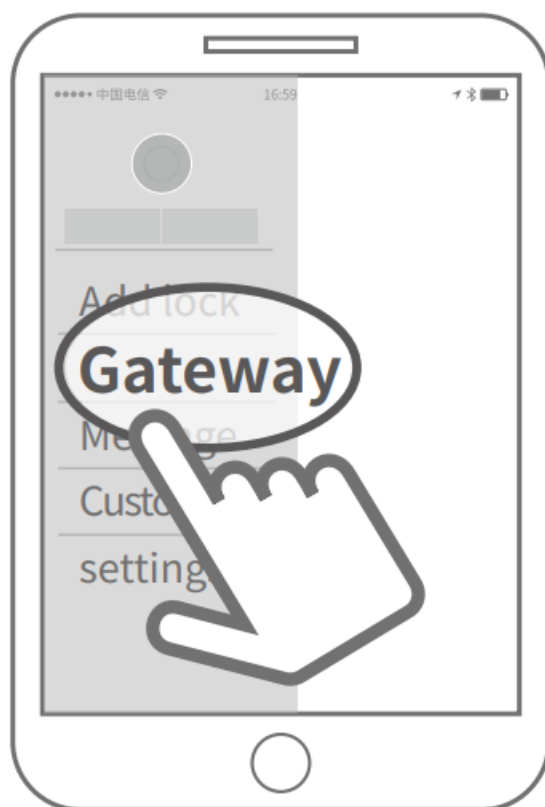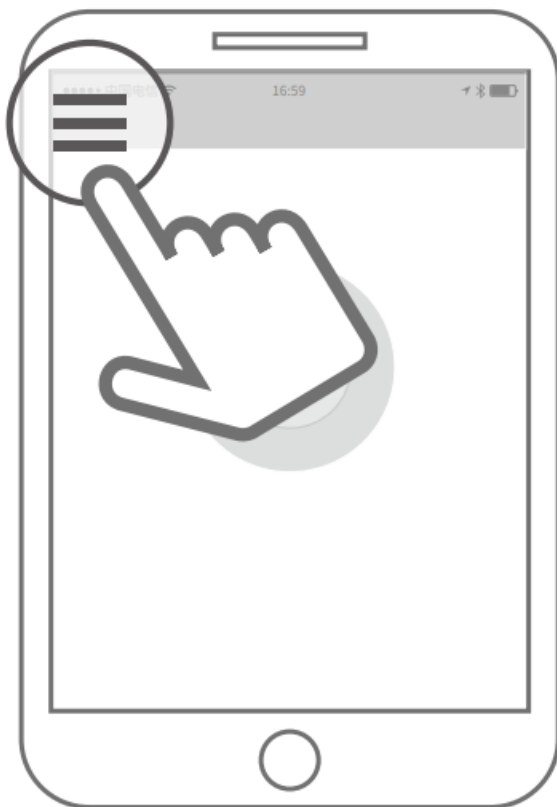

3. Select [Gateway]

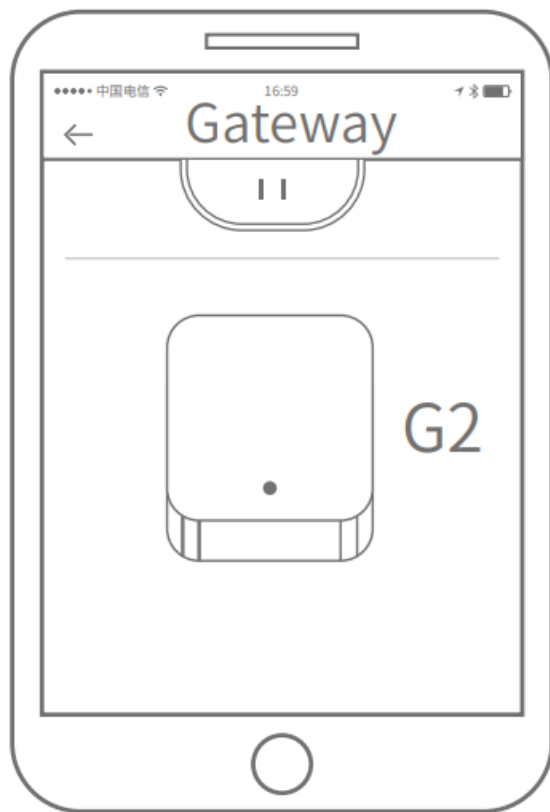

4. Select [G2]
5. Plug in the Gateway and power it on

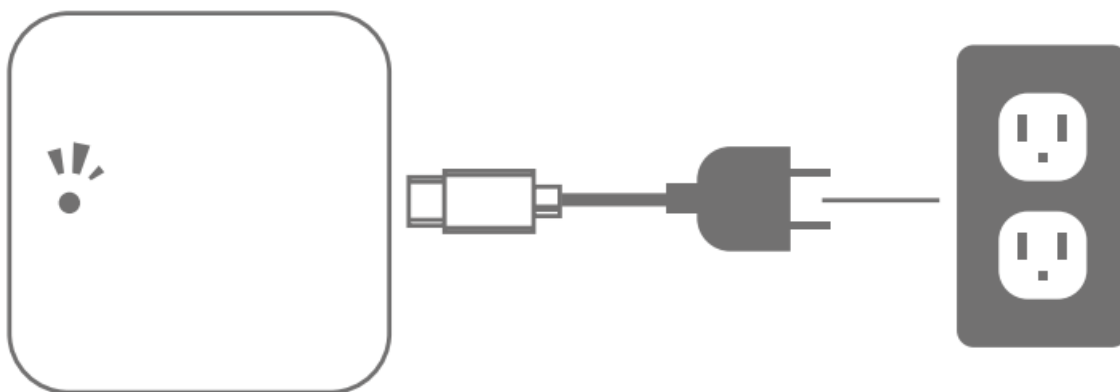


6. While the light is flashing alternately in red and blue, press” +” sign



7. Add Gateway



8. Select the network and input your WiFi password

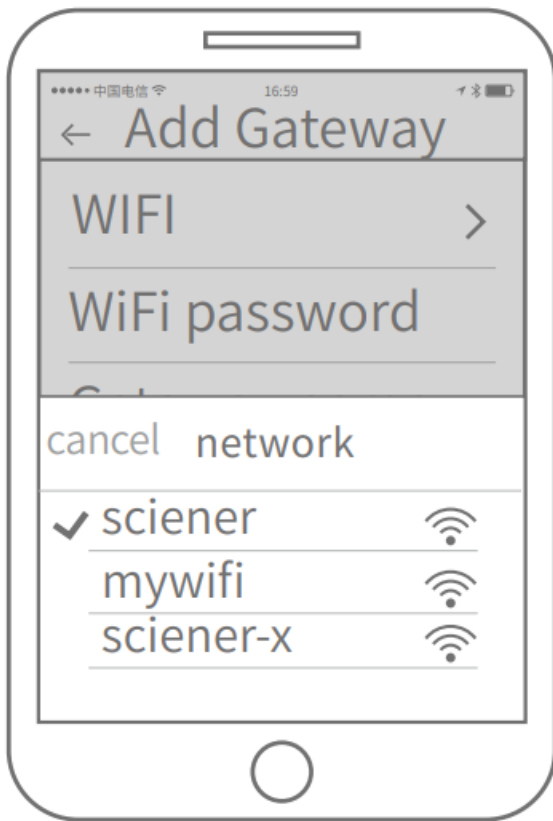

Notice: If the above process times out, please power off and try again.

Limited Warranty

1. For any defect in material and workmanship, the original purchaser of the product can:
 1. Return or ask for a replacement within 7 invoice days.
 2. Ask for a replacement within 15 invoice days.
 3. Ask for free repair in 365 invoice days.
2. This warranty does not cover defects caused by modification, alteration, misuse or physical abuse of the product.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- one of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).

IC Caution:

RSS-Gen Issue 5

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:


1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. RF exposure statement:
The equipment complies with IC Radiation exposure limit set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Disclaimer

We continuously optimize products as new technologies and features are developed. For this reason, we reserve the right to make alterations to the products without prior notice.



Documents / Resources

	Sciener G2 Smart Lock Gateway [pdf] User Manual G2, G2 Smart Lock Gateway, Smart Lock Gateway, Lock Gateway, Gateway
-------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------

References

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.