

## ScreenBeam Mini2 Kit Instructions

Home » ScreenBeam Mini2 Kit Instructions

#### Contents

- 1 ScreenBeam Mini2 Kit
- 2 ScreenBeam Mini2 Kit Firmware Update Instruction
- 3 Documents / Resources
- **4 Related Posts**

# **ScreenBeam®**


### ScreenBeam Mini2 Kit



### ScreenBeam Mini2 Kit Firmware Update Instruction

- 1. Download the ScreenBeam Mini 2 Kit firmware (sbmini2\_FW\_x.x.xx.xz.zip)
- 2. Extract the zip file. You should see the "autorun" folder, the "install" file and this upgrade instructions guide.
- 3. Insert your USB flash drive to an available USB port on your Laptop/PC.

- 4. Copy both the "autorun" folder and "install" file to the top directory of the USB flash drive Note: Do not use a portable hard drive. You should use a formatted FAT/FAT32 USB flash drive only.
- 5. Make sure the HDTV connected to the Receiver is powered on and the correct HDMI input is selected.
- 6. **Note**: You must disconnect all wireless devices (Ultrabooks, smartphones and tablets) from the Receiver before upgrading the firmware.
- 7. When the "Ready to Connect" screen appears, plug the USB flash drive into the female port of the included USB cable.
- 8. Wait a few seconds and the firmware upgrade will start automatically. You should see the firmware upgrade message appears on your TV.
- 9. Note: The HDTV screen may go temporarily blank for a few seconds during the upgrade process.
- 10. **Warning**! Do not power off the Receiver or remove the USB flash drive while the upgrade is in progress. This may cause the firmware upgrade to fail.
- 11. When the upgrade completes, the "Ready to Connect" screen reappears on the HDTV, with the new firmware version information displayed at the bottom left corner.
- 12. The ScreenBeam receiver is now upgraded. Now you can remove the USB flash drive.

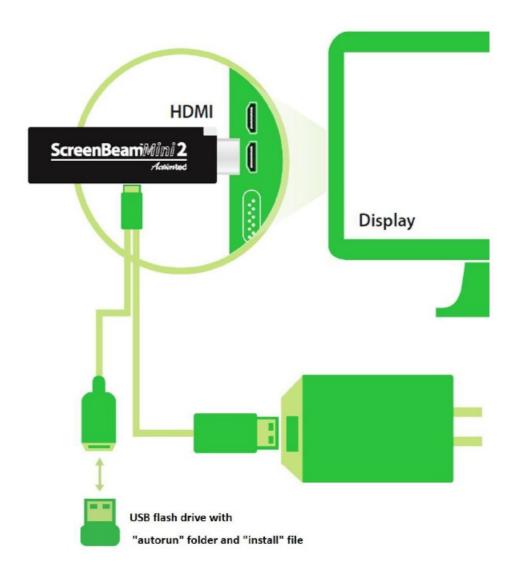

#### **Documents / Resources**

# ScreenBeam Mini2 Kit [pdf] Instructions Mini2 Kit, Mini2, Kit

Manuals+,