



# SCS Sentinel MCO0108 OpenGate 3 Automation Kit for Sliding Gates Instruction Manual

[Home](#) » [SCS sentinel](#) » SCS Sentinel MCO0108 OpenGate 3 Automation Kit for Sliding Gates Instruction Manual



## Contents

### [1 MCO0108 OpenGate 3 Automation Kit for Sliding Gates](#)

#### [1.1 OpenGate 3](#)

#### [1.2 MC00108](#)

#### [1.3 Intallation](#)

##### [1.3.1 PROGRAMMING](#)

#### [1.4 Now you only need to dial on your keypad:](#)

#### [1.5 ASSISTANCE TECHNIQUE](#)

#### [1.6 WARNING](#)

### [2 Documents / Resources](#)

#### [2.1 References](#)


### [3 Related Posts](#)

## MCO0108 OpenGate 3 Automation Kit for Sliding Gates

### OpenGate 3


### MC00108

Automation kit for sliding gates



[www.scs-sentinel.com/downloads](http://www.scs-sentinel.com/downloads)

## Intallation

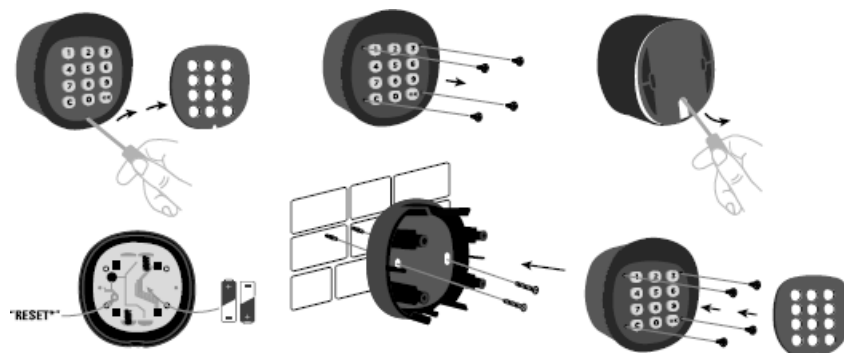

## PROGRAMMING

Please follow the instructions below to program your wireless keypad:

– 1st digit is for function code, 2nd to 5th digits are for password .

1 for total gate opening operation

2 for partial gate opening operation (pedestrian opening)

3 for additional receiver programming

– Press the RF button on your gate opener electronic card (PCBA) as if you were programming a remote control.

Enter << 11111 >> then press << OK >>

Your keypad is now pre-programmed on your gate opener electronic card .

– Then proceed as follows to change the « 1111 » code on your keypad :

> Press < C >> button for 12 seconds waiting for the long beep sound (red/blue flashing light is on alternately).

> Press 11111 + OK until there are two beeps and blue light is on.

> Press your new password with 4 digits + OK until there are two beeps and blue light is on.

> Press again your new password with 4 digits + OK until there are three beeps and flashing blue light. Your new password is programmed successfully.

### Now you only need to dial on your keypad:

1+ « new password + OK » for total gate opening operation

2 + « new password + OK » for partial gate opening operation (pedestrian opening)

3+ « new password + OK » for additional receiver programming

\*RESET: you can reset the wireless keypad only by pressing the RESET button situated near the keypad 2 batteries until you hear a long beep.

If you get 2 keyboards, they must imperatively have the same code. Sensitive keys. Simply apply a gentle pressure on the keys

### ASSISTANCE TECHNIQUE



2 ans / 2 years  
2 anni / 2 años



The invoice and barcode will be required as proof of purchase date during the warranty period.

For an individual answer, use our online site web [www.scs-sentinel.com](http://www.scs-sentinel.com)

### WARNING

Don't throw batteries or out of order products with the household waste (garbage). The dangerous substances that they are likely to include may harm health or the environment. Make your retailer take back these products or use the selective collect of garbage proposed by your city.

### Documents / Resources

	<a href="#">SCS Sentinel MCO0108 OpenGate 3 Automation Kit for Sliding Gates</a> [pdf] Instruction Manual MCO0108 OpenGate 3 Automation Kit for Sliding Gates, MCO0108, OpenGate 3 Automation Kit for Sliding Gates, OpenGate 3, Automation Kit
--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.