



SCT AW-UE50 Supports Multiple Camera User Guide

[Home](#) » [SCT](#) » SCT AW-UE50 Supports Multiple Camera User Guide 

Contents

- [1 SCT AW-UE50 Supports Multiple Camera](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Models](#)
- [5 Conections](#)
- [6 Module Dimensions](#)
- [7 Documents / Resources](#)



Sound Control
Technologies

SCT AW-UE50 Supports Multiple Camera



Product Information

- **Product Name:** RCU2S-C30TM USB
- **Application Guide:** Panasonic AW-UE20
- **Front Panel:** RCU2S-HETM Field-Upgradeable microSD Slot
- **USB-B Cable:** RCC-M004-1.0M (RCU2S-HETM) to USB-A
- **RJ11 Cable:** RCC-C029-0.3M (RCU2S-CETM) to DC Plug
- **USB-A Cable:** RCC-M005-0.3M (RCU2S-CETM) to USB-C
- **Module Dimensions:**
 - **RCU2S-CETM:** H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
 - **RCU2S-HETM:** H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)
- **SCTLink™ Cable:** Power, UVC Control & Video
- **SCTLink™ Cable Requirements:**
 - The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.
 - Integrator-Supplied CAT5e/CAT6 STP/UTP Cable with T568A or T568B pinout.
 - **Maximum Length:** 100m
- **Power Supply:** W PS-1230VDC 100-240V 47-63Hz

Product Usage Instructions

1. Connect the USB-B cable (RCC-M004-1.0M) from the RCU2S-HETM module to a USB-A port on your laptop.
2. For connecting to a DC plug, use the RJ11 cable (RCC-C029-0.3M) with the RCU2S-CETM module.
3. If you need to connect to a device with USB-C port, use the USB-A cable (RCC-M005-0.3M) with the RCU2S-CETM module.
4. Ensure the SCTLink™ cable is a single, point-to-point CAT cable without any couplers or interconnections.
5. Use an integrator-supplied CAT5e/CAT6 STP/UTP cable with T568A or T568B pinout for the SCTLink™ cable.
6. The maximum length of the SCTLink™ cable should not exceed 100m.
7. Connect the power supply (W PS-1230VDC 100-240V 47-63Hz) to the device.


Models

The RCU2S-C30™ supports multiple camera models:


- Panasonic AW-HE20
- Panasonic AW-UE20
- Panasonic AW-UE40
- Panasonic AW-UE50

Connections

Shown: Panasonic AW-UE20

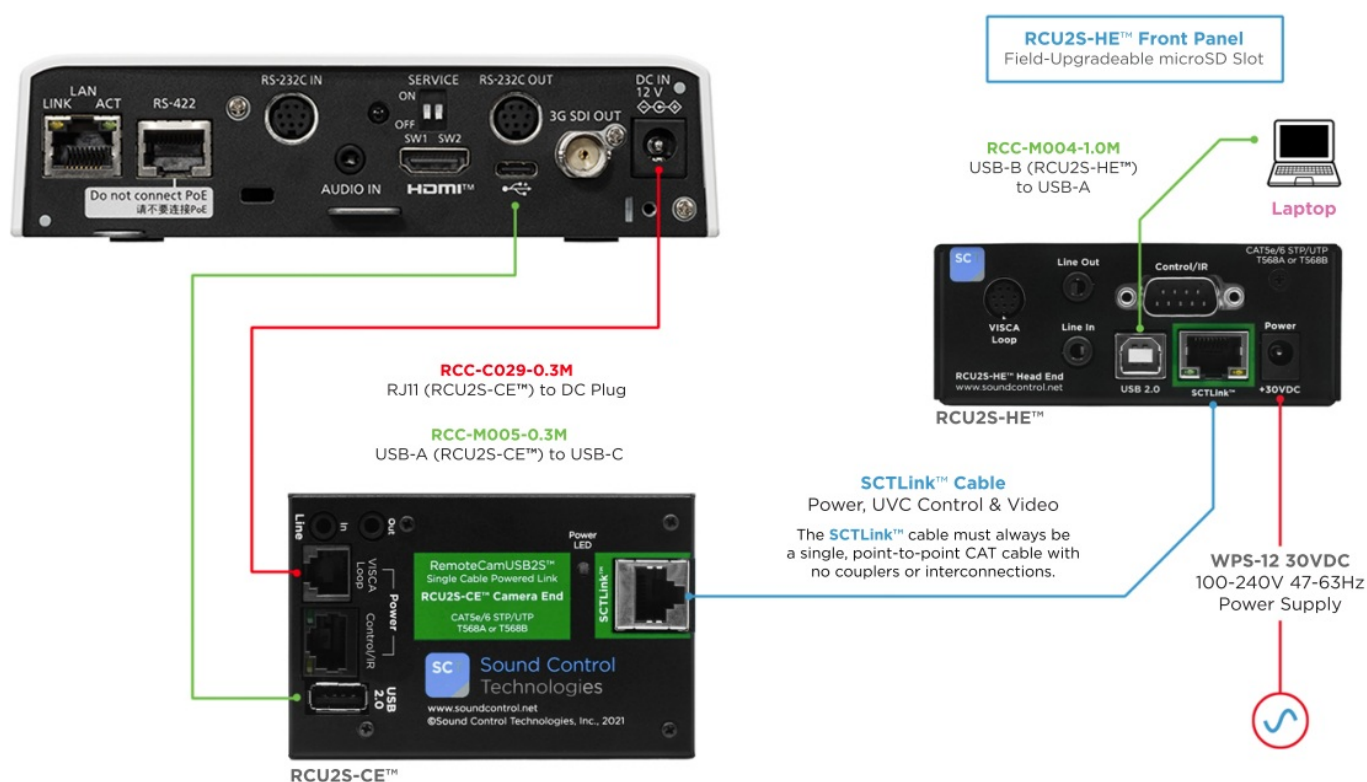

SCTLink™ Cable Specs

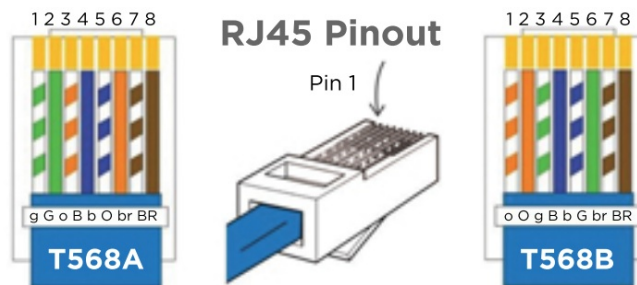


- Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
- T568A or T568B (100m Max Length)

Module Dimensions

- **RCU2S-CE™**: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
- **RCU2S-HE™**: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

Documents / Resources



[SCT AW-UE50 Supports Multiple Camera \[pdf\]](#) User Guide
 AW-UE50 Supports Multiple Camera, AW-UE50, Supports Multiple Camera, Multiple Camera, Camera