



SCT RC-SDA4 Plus Single Input Dual Output Distribution Amplifier Datasheet

[Home](#) » [SCT](#) » SCT RC-SDA4 Plus Single Input Dual Output Distribution Amplifier Datasheet 

SCT RC-SDA4 Plus Single Input Dual Output Distribution Amplifier Datasheet

Contents


- [1 Application Guide](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)

Application Guide

SCTLink™™ Cable


Power, Control & Video

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

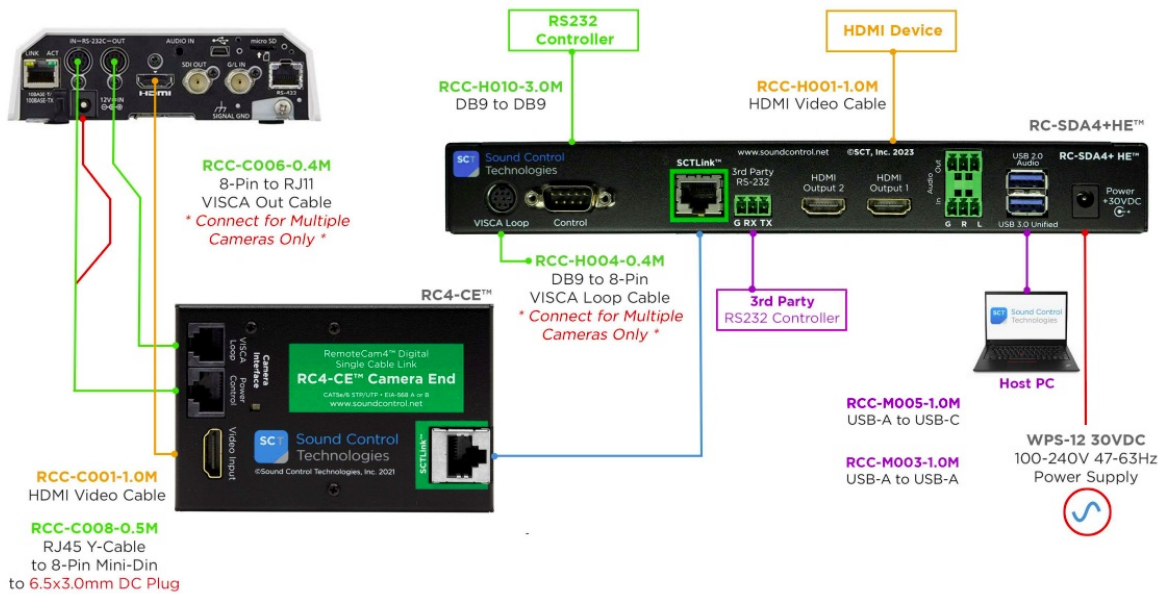

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (10m-100m min/max Length)

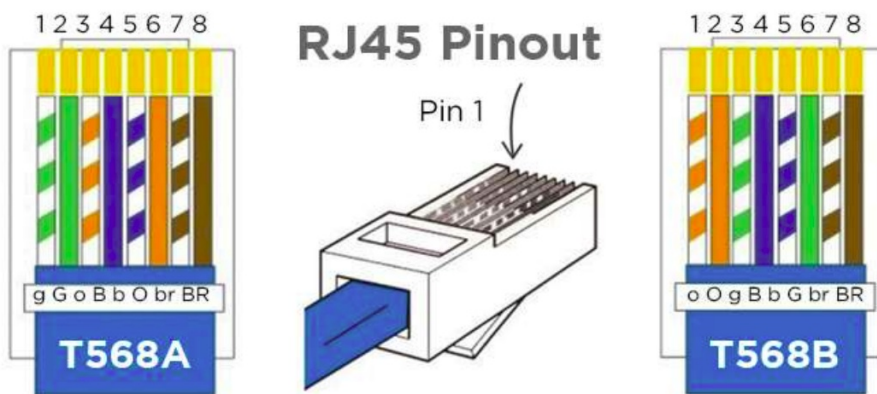

Documents / Resources

[SCT RC-SDA4 Plus Single Input Dual Output Distribution Amplifier](#) [pdf] Datasheet
RC-SDA4 Plus Single Input Dual Output Distribution Amplifier, RC-SDA4, Plus Single Input Dual Output Distribution Amplifier, Dual Output Distribution Amplifier, Distribution Amplifier

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.