



SCT RCU2E-A40 Camera Interface Module User Guide

[Home](#) » [SCT](#) » SCT RCU2E-A40 Camera Interface Module User Guide 

Contents

- [1 SCT RCU2E-A40 Camera Interface Module](#)
- [2 SCTLink™ Cable Specs](#)
- [3 OVERVIEW](#)
- [4 Module Dimensions](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)



SCT RCU2E-A40 Camera Interface Module




The RCU2E-A40™ supports multiple camera models:

- Lumens VC-TRI
- Minrray UV510A

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (100m Max Length)

OVERVIEW

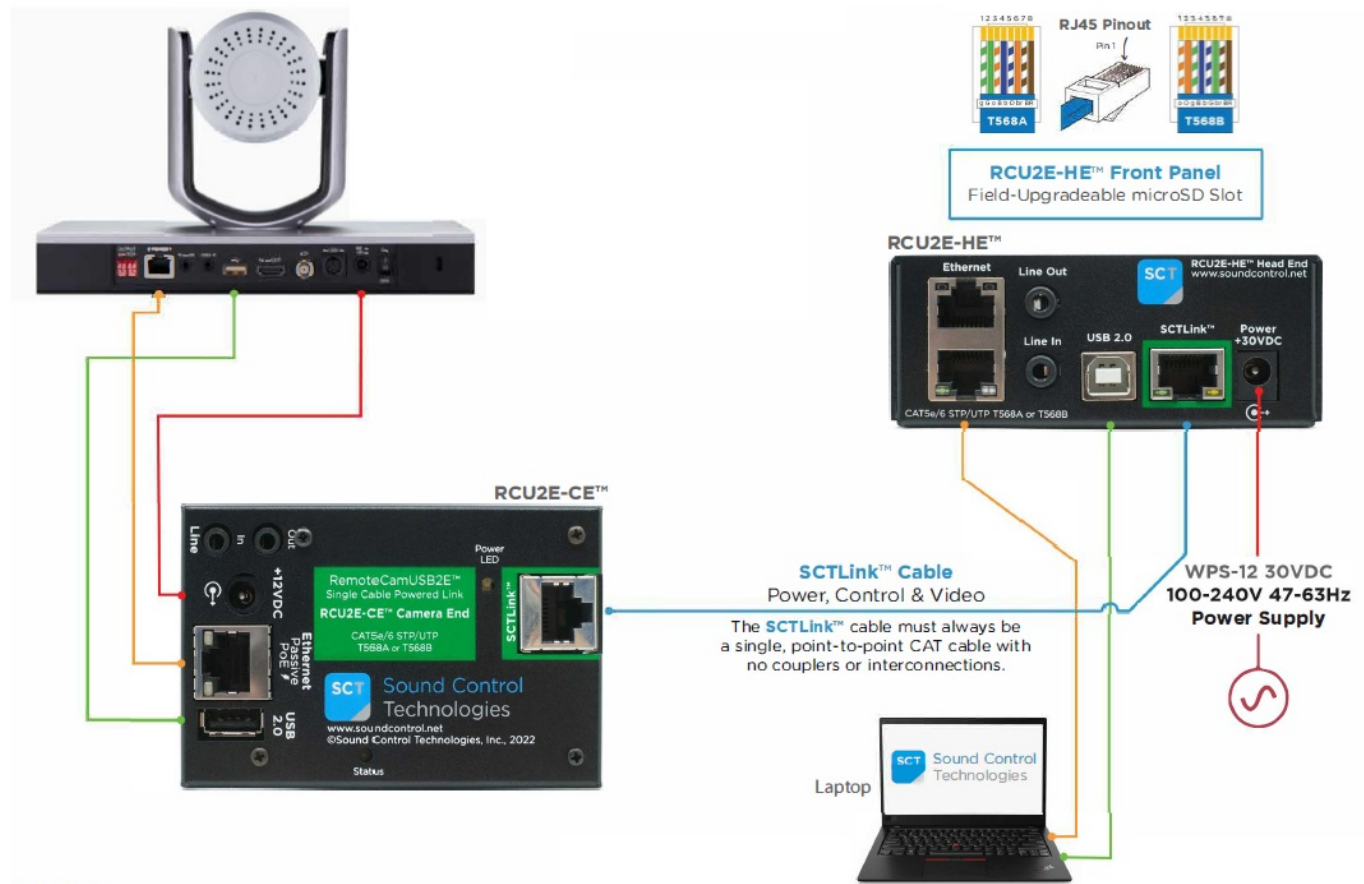


- RCC-MOOS-0.3M
 - USB-A (RCU2E-CE™) to USB-C
- RCC-C002-0.3M
 - RJ45 (RCU2E-CE™) to RJ45
- PPC-004-0.4M
 - DC Power Plug (RCU2E-CE™) to EIAJ-4 DC Power Plug
- RCC-M004-1.0M
 - USB-B (RCU2E-HE™) to USB-A
- RCC-M014-1.0M
 - USB-B (RCU2E-HE™) to USB-C

Module Dimensions

- RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
- RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

Documents / Resources



[SCT RCU2E-A40 Camera Interface Module](#) [pdf] User Guide

Lumens, Minrray, RCU2E-A40, RCU2E-A40 Camera Interface Module, Camera Interface Module, Interface Module, Module

[Manuals+](#)