

SDC FB-4 Four Output Power Distribution Module Instruction Manual


Contents

- [1 DOOR CONTROLLERS](#)
- [2 FB-4](#)
 - [2.1 Four Output Power Distribution Modules](#)
 - [2.1.1 MODELS](#)
 - [2.1.2 STANDARD FEATURES](#)
 - [2.1.3 APPLICATIONS](#)
 - [2.1.4 CROSS REFERENCE](#)
 - [2.1.5 SPECIFICATIONS](#)
 - [2.1.6 HOW TO ORDER](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

DOOR CONTROLLERS

FB-4

Four Output Power Distribution Modules

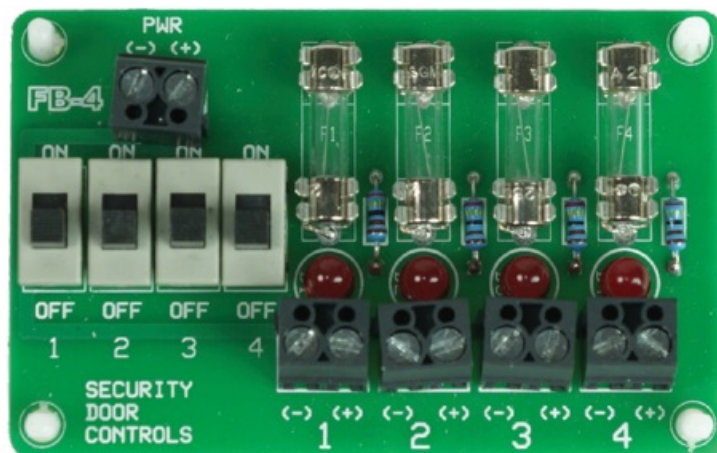

Power control modules ensure compatibility of access hardware components and simplify system installation and troubleshooting. Modules may be ordered with or without power supplies. Different modules may be specified for one power supply.

SDC's FB-4 series allows for precisely calculated circuit protection with four, 2 Amp fuse protected outputs. Distributing the primary DC output of any 600 series power supplies into four, individually fused class 2 outputs to provide up to sixteen outputs and allow for termination of multiple DC devices for ease of maintenance.

Additionally, four on/off switches allow individual control of voltage outputs. LED visual status indicators provide relay activation status.



FB-4 Four Output Power Distribution Module








- Four modules, sixteen total outputs
- Four, individually fused class 2 outputs
- Four separate outputs for maintenance ease
- Four on/off switches to individually control voltage outputs
- Auto-sensing dual voltage
- Visual status indicators (LED)



Distribute a single voltage output to 4 devices.



	CR4	ACM-1	EMC	FB-4	12VR
					
Description	Four station control relays	Six input control relays	Dual channel exit device sequencers	Four output power distribution modules	Voltage power convertors
Application	Individual control of four locks	Control one lock with up to six activation devices	Sequence electrified panic device and operator for single or pair of doors	Distribute a single voltage output to four devices	Convert 24 VDC to regulated 12 VDC output
Inputs	(4) N/O, Dry	(3) N/O, Dry (3) N/C, Dry	(2) N/O, Dry	(1) Power, 12/24 VDC	(1) Power, 24 VDC
Outputs	(4) SPDT, Fused, Wet or Dry (4) SPDT, Unfused, Wet or Dry	(1) SPDT, Wet (1) SPDT, Dry	(4) N/O, Dry	(4) Fused Class 2, On/Off, 12/24VDC (Matches input)	(1) Fused Class 2, 12 VDC (1) Fused Class 2, 24 VDC
	CLICK TO VIEW	CLICK TO VIEW	CLICK TO VIEW		CLICK TO VIEW



SPECIFICATIONS

	FB-4
Input	12/24 VDC $\pm$ 10%
Dimensions	3 1/4" x 2"
Fuses	2 Amp (Per Output)
Output Configuration	(4) Individually Fused



HOW TO ORDER

FOLLOW STEPS FOR ORDERING



Designates optional step

1| SPECIFY MODEL

FB-4 Four Output Power Distribution Module

STEP NUMBER:	1
ORDERING EXAMPLE:	FB-4



the lock behind the system

© 2024 Security Door Controls

LIT-DS_FB-4_020524
sdcsecurity.com • 800.413.8783

Documents / Resources

	SDC FB-4 Four Output Power Distribution Module [pdf] Instruction Manual FB-4 Four Output Power Distribution Module, FB-4, Four Output Power Distribution Module, Out put Power Distribution Module, Power Distribution Module, Distribution Module
--	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.