



SEALEY CD2013.V2 2000W CONVECTOR HEATER

Instructions

[Home](#) » [SEALEY](#) » SEALEY CD2013.V2 2000W CONVECTOR HEATER Instructions 

Contents

- 1 SEALEY CD2013.V2 2000W CONVECTOR HEATER
- 2 ELECTRICAL SAFETY INFORMATION
- 3 INTRODUCTION
- 4 SPECIFICATION
- 5 ASSEMBLY
- 6 OPERATION
 - 6.1 SELECTING THE HEAT OUTPUT
 - 6.2 USING THE THERMOSTAT
- 7 SAFETY CUT OUT FEATURE
- 8 MAINTENANCE
 - 8.1 ENVIRONMENT PROTECTION
 - 8.2 WEEE REGULATIONS
- 9 Information requirements for electric local space heaters
- 10 Documents / Resources
 - 10.1 References
- 11 Related Posts



SEALEY CD2013.V2 2000W CONVECTOR HEATER



WARNINGS & CAUTIONS

USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.

SAFETY


WARNING

It is the user's responsibility to check the following

- Check all electrical equipment and appliances to ensure that they are safe before using.
- Inspect power supply leads, plugs and all electrical connections for wear and damage. Sealey recommend that an RCD Residual Current Device is used with all electrical products. You may obtain an RCD by contacting your local Sealey stockist.
- If the heater is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.

ELECTRICAL SAFETY INFORMATION

YELLOW & GREEN EARTH WIRE

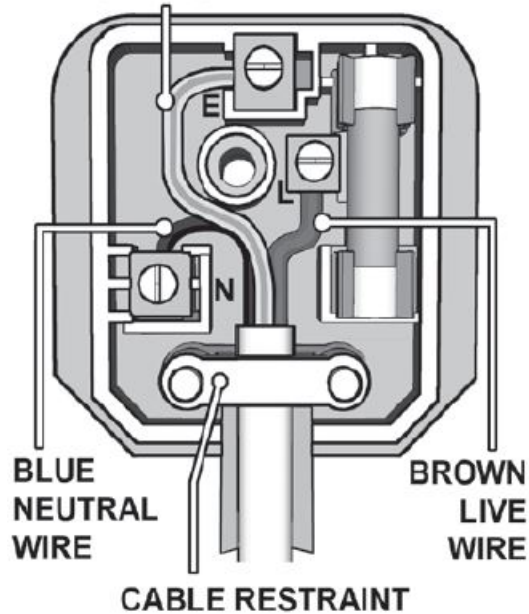

It is important that the following information is read and understood. Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.

Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.

IMPORTANT

Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse.

- DO NOT pull or carry the appliance by the power cable.
- DO NOT pull the plug from the socket by the cable.
- DO NOT use worn or damaged cables, plugs or connectors.
- Ensure that any faulty item is repaired or replaced immediately by a qualified electrician.
- This product is fitted with a BS1363/A 13 Amp 3 pin plug.
- If the cable or plug is damaged during use, switch the electricity supply off and remove from use.
- Ensure that repairs are carried out by a qualified electrician.
- Replace a damaged plug with a BS1363/A 13 Amp 3 pin plug. If in doubt contact a qualified electrician.
 - Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
 - Connect the BROWN live wire to the live terminal L.
 - Connect the BLUE neutral wire to the neutral terminal N.
 - Ensure that the cable outer sheath extends inside the cable restraint and that the restraint is tight.
 - Sealey recommend that repairs are carried out by a qualified electrician.

GENERAL SAFETY

WARNING

Disconnect the heater from the mains power supply before carrying out any servicing or maintenance.

- Disconnect the heater from the power supply before handling or cleaning.
- Maintain the heater in good order and clean condition for best and safest performance.
- Replace or repair damaged parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.

- Ensure there is adequate lighting and keep the immediate area in front of the outlet grille clear.
- Only use the heater standing on its feet in the upright position.
- DO NOT allow any untrained persons to use the heater. Ensure they are familiar with the controls and hazards of the heater.
- DO NOT let power lead hang over an edge (i.e. table), or touch a hot surface, lie in heater hot air flow, or run under a carpet.
- DO NOT touch the outlet grille (top) of the heater during and immediately after use as it will be hot.
- DO NOT place the heater near items that may be damaged by heat.
- DO NOT place heater too close to yourself or any object, allow the air to circulate freely.
- DO NOT use the heater for any purpose other than for which it is designed.
- DO NOT use heater on very deep pile carpets.
- DO NOT use the heater outdoors. These heaters are designed for indoor use only.
- DO NOT use heater if the power cord, plug or the heater is damaged, or if the heater has become wet.
- DO NOT use in bathroom, shower room, or in any wet or damp environments or where there is high condensation.
- DO NOT operate the heater when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- DO NOT allow the heater to get wet as this may result in an electric shock and personal injury.
- DO NOT insert or allow objects to enter any openings of heater as this may cause an electric shock, a fire or damage to heater.
- DO NOT use the heater where there are flammable liquids, solids or gases such as petrol, solvents, aerosols etc or where heat sensitive materials may be stored.
- DO NOT place the heater immediately below any electrical outlet.
- DO NOT cover heater when in use, and do not obstruct the air inlet and outlet grille (i.e. clothing, curtain, furniture, bedding etc).
- Allow the unit to cool before storage. When not in use, disconnect from the mains power supply and store in a safe, cool, dry, childproof area Jack.

NOTE

Children of less than 3 years should be kept away unless continuously supervised. Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.

INTRODUCTION

Modern design convector heater with three heat settings of 750/1250/2000W for gradual control of heating elements. Rotary controlled room thermostat maintains ambient temperature at preset level, with the addition of a thermal cut-off and overheat protection. Features hard-wearing feet to allow for maximum stability. Slimline, sturdy construction and high quality finish make this unit suitable for home, light industrial and office environments. Supplied with 3-pin plug.

SPECIFICATION

- Model No:2013.V2

- Power:750/1250/2000W
- Size (W x D x H):620 x 224 x 380mm
- Supply:230V

ASSEMBLY



To fit the feet, align them and secure with the self tapping screws provided.

OPERATION

- Place the heater in a suitable position in the area you require to heat.
- Allow a minimum of 50cm between the heater and adjacent objects such as furniture etc.
- Plug the heater into the mains supply.
- Turn the thermostat knob to a high setting.

SELECTING THE HEAT OUTPUT



- Choose the required heat output by selecting the appropriate switch which will light up when pressed.
- Low setting (750W) Select switch A.
- Medium setting (1250W) Select switch B.
- High setting (2000W) Select both switches.

USING THE THERMOSTAT

Once the required room temperature has been achieved, turn the thermostat down slowly in the direction of the min. setting until the heat output switch light goes out. The heater will then keep the surrounding air at the set temperature by switching on and off at intervals. You may reset the thermostat at any time.

SAFETY CUT OUT FEATURE

The heater is fitted with a thermostatic safety cut out which will turn the heater off automatically should the airflow become blocked or if the heater has a technical malfunction. Should this happen, switch the heater off and unplug it from the mains power supply.

WARNING

In such a case the heater will be very hot. DO NOT connect the heater to the power supply again until the reason the safety cutout activated has been identified. Allow the heater to cool completely before handling and then check the air inlet and outlet for obstructions before attempting to switch the unit back on. If the cause is not obvious return the heater to your local Sealey stockist for servicing.

MAINTENANCE

WARNING

Before attempting any maintenance ensure the unit is unplugged from the mains power supply and that it is cool.

- Clean the unit with a soft dry cloth. DO NOT use abrasives or solvents.
- Periodically check the air inlet and outlet to ensure the air way is clear.

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment WEEE. When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note

It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505. Important: No Liability is accepted for incorrect use of this product. Warranty Guarantee is 12 months from purchase date, proof of which is required for any claim www.sealey.co.uk Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR sales@sealey.co.uk


Information requirements for electric local space heaters

Model identifier: CD2013.V2

Item	Symbol	Value	Unit	Item	Unit
Heat output				Type of heat input, for electric storage local space heaters only select one	
Nominal heat output	P _{nom}	2.0	kW	Manual heat charge control, with integrated thermostat	Yes No
Minimum heat output indicative Enter figure or NA	P _{min}	0.7	kW	Manual heat charge control with room and/or outdoor temperature feedback	Yes No
Maximum continuous heat output	P _{max,c}	1.9	kW	Electronic heat charge control with room and/or outdoor temperature feedback	Yes No
				Fan assisted heat output	Yes No
Auxiliary electricity consumption				Type of heat output/room temperature control (select one)	
At nominal heat output	e _{lmax}	0.000	kW	Single stage heat output and no room temperature control	Yes No
At minimum heat output	e _{lmin}	0.000	kW	Two or more manual stages, no room temperature control	Yes No
In standby mode	e _{lSB}	0.000	kW	With mechanic thermostat room temperature control	Yes No
				With electronic room temperature control	Yes No
				Electronic room temperature control plus day timer	Yes No
				Electronic room temperature control plus week timer	Yes No
				Other control options multiple selections possible	
				Room temperature control, with presence detection	Yes No

	Room temperature control with open window detection	Yes	No
	With distance control option	Yes	No
	With adaptive start control	Yes	No
	With working time limitation	Yes	No
	With black bulb sensor	Yes	No
Contact details: Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR www.sealey.co.uk			

Documents / Resources

	<p>SEALEY CD2013.V2 2000W CONVECTOR HEATER [pdf] Instructions CD2013.V2 2000W CONVECTOR HEATER, 2000W CONVECTOR HEATER, CONVECTOR HEATER</p>
--	---

References

-  [Sealey - Leading Professional Tool & Workshop Equipment Supplier](#)