




SECRUI D12 Door Alarm Sensor User Guide

[Home](#) » [secrui](#) » [SECRUI D12 Door Alarm Sensor User Guide](#) 

SECURITY Door Sensor Alarm User Guide Model: D12

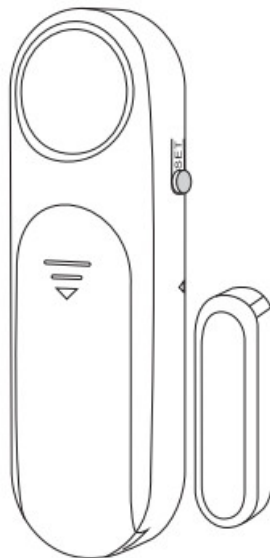

The Security Window/Door Alarm provides a simple-to-use, cost-effective security solution to protect you and your family against home invasions thanks to the 120-decibel alarms, loud enough to make a would-be intruder think twice about entering through your doors or windows. The window/door alarms feature a contemporary design with easy access buttons and controls for simple operation.

Contents

- 1 Operation
- 2 Installation Guide
- 3 Precautions
- 4 Technology Parameters
- 5 Technology Parameters
- 6 Documents / Resources
 - 6.1 References

Operation

ON/OFF Switch — open and close the door alarm switch.
Press the SET button to change the door alarm's chime mode.


Mode	Press SET to Change Mode	Mode of operation
Intruder Alarm Mode	1	When the door is opened, alarm sounds for 1 minute or until SET button is pressed to stop.
Entry Doorbell Mode	2	After the door is opened, the alarm makes a ding dong sound then stops.
Open Alarm	3	While the door opened, the rapid alarm sounds until door is closed then stop.
Open Reminder	4	While the door is opened, a slowly amplifying chime sounds until it is closed.

Note:

1. When the Intruder alarm mode is activated, press the SET key to cancel the alarm. or pushed the switch to the OFF to stop the alarm. If you do not take either of these steps, then the alarm wilt keep ringing for 1 minute.
2. When the sensor alarm battery is low, the Alarm will beep for a shorter period. Replace the batteries promptly before the alarm stops working Altogether.

Installation Guide

1. Use the double-side adhesive tape to fix the main unit at the side of the door/window. Attach the bar magnet to door frame/window frame with the arrow aligning with the reference line of the main unit.
2. Test the setup by switching the system's switch to "ON" position of the main unit and see whether the alarm can be triggered by opening the door/window.

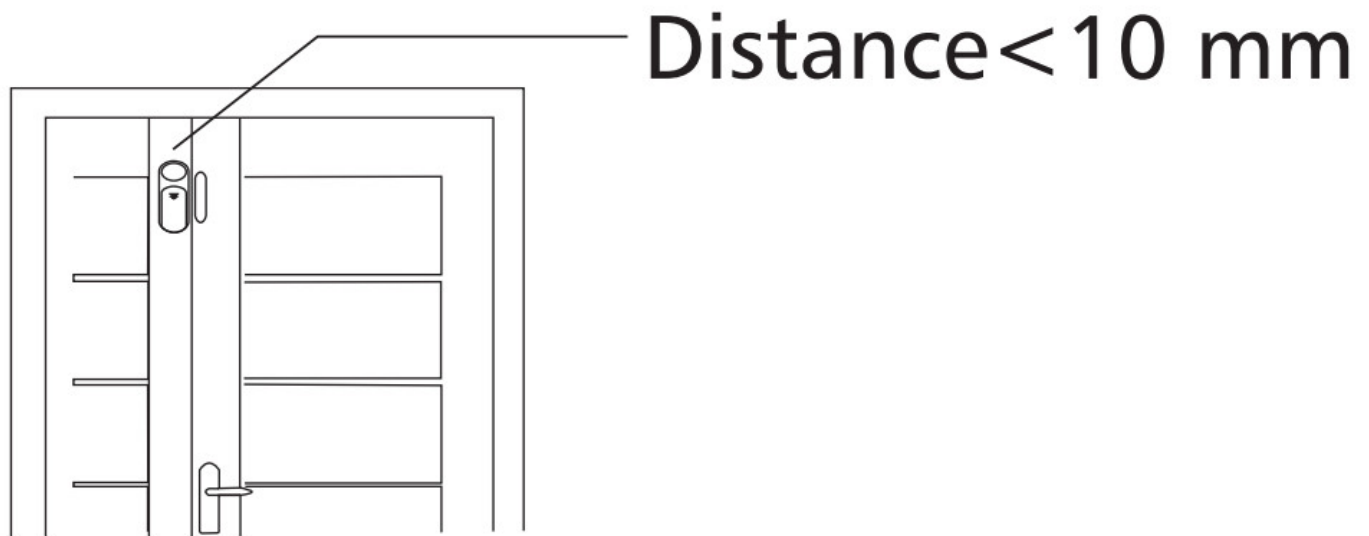

Precautions

1. Do not install in a place where the surface is easily damaged or wet.
2. Do not install in a place where the installation base is not strong.
3. Leave the host away from magnetic product.

Technology Parameters

Brand: SECURI

Model: D12

Operating voltage: 3V (2x AAA type batteries)

Environment humidity: < 90%

Working humidity: -10 to 60 °C

Technology Parameters

Our company provides 18 months of free warranty and lifetime maintenance services for the products, and guarantees 24 – hours online service. Within 18 months from the date of purchase, damages caused by poor material or design defects of the product can be replaced or repaired free of charge.

Repairs and replacements performed after 18 months will be charged the product cost.

Information to be provided when contact the seller for warranty

1. Product name
2. Order number
3. Fault description

Manufacturer: Shenzhen Keri Smart Technology Co., Ltd

Address: Building B1, Xinhaosheng Industry Zone, Yonge Road, Qiaotou, Flying Subdistrict, Bao'an District, Shenzhen, China

Email: support@secrui.com

Youtube: Secure Tech <http://www.lukbird-call.com>

SECURITY

Prolix GmbH

Brehmstr.56, 40239 Dusseldorf

Germany
Telefon:+4921131054698
Email: eu@eulinx.eu



Documents / Resources



[SECURI D12 Door Alarm Sensor](#) [pdf] User Guide
D12 Door Alarm Sensor, D12, Door Alarm Sensor, Alarm Sensor, Sensor

References

- [User Manual](#)

[Manuals+.](#)