



Shenzhen Longhui Electronics A9 Car Wireless Reversing Display Instruction Manual

[Home](#) » [Shenzhen Longhui Electronics](#) » Shenzhen Longhui Electronics A9 Car Wireless Reversing Display Instruction Manual 



SHENZHEN

Longhui Electronics A9 Car Wireless Reversing Display
Instruction Manual

1080P DVR
Touch Button



Contents

- 1 Certificate:
- 2 Package contents:
- 3 Working range:
- 4 Installation Video :
- 5 Before installing, read the information below:
- 6 Connection
- 7 Memory card installation
- 8 The monitor is attached to the dash with two brackets provided + 3M
- 9 Monitor (Touch Button)
- 10 Product function introduction
- 11 Documents / Resources
- 12 Related Posts

Certificate:

The system has been certificated by CE & FCC & EMC & RoHs & Waterproof.



Package contents:

- Wireless Touch Button Monitor
- Digital Wireless backup camera
- 2*power cords
- Brackets for Monitor
- Cigarette lighter adapter
- Antennas
- 1*Sun visor
- Screws
- Instructions

(This manual is a general specification that applies to one monitor with one camera, one monitor with two cameras, one monitor with four cameras.)



Working range:

This system is mainly used to RVs, Travel Trailers, Fifth wheels, Trucks, Motor-home etc.

Vehicles under 55FT—High-Speed Driving Observation

Vehicles under 60FT—Slow-Speed Driving or Reversing

Monitor mount on the dash and the camera mount on the top of tail make the antenna over the roof which can make the signals powerful transmission.



Installation Video :

Please watch the below video on YouTube to help you install the system.

(Or please contact us to get the video link directly)

<https://youtu.be/wi7DXZwbPsE>

If you can not open this link, it may be caused by the wrong type of software. So you can search the video ID:

wi7DXZwbPsE on www.youtube.com

Below are five videos for installing on RVs (only for reference)

<https://youtu.be/42jvZUzh8sQ>

<https://www.youtube.com/watch?v=CBCII-J9wM8>

<https://www.youtube.com/watch?v=5Z9KXXzXrqQ>

Before installing, read the information below:

1. Please notice below data of power supply input to the monitor and camera.

Monitor: voltage range 10V-35V \geq 800mA

Camera and Transmitter: 10V-36V \geq 800mA

Note: If the power is over 36V to the camera, it will cause damage.


We recommend DC 12V to the monitor and camera.

2. Before installation, you must test the device. Please reference the image below.

A. Wiring 2 power cords to camera and monitor.

B. Lose the screws on a green adapter, then insert the red wire(copper wire) to the Positive (+) slot, while the black wire(copper wire) to the Negative (-) slot.

C. Plug cigarette lighter and turn on the red switch. If you see images on the monitor, it means the system works well.

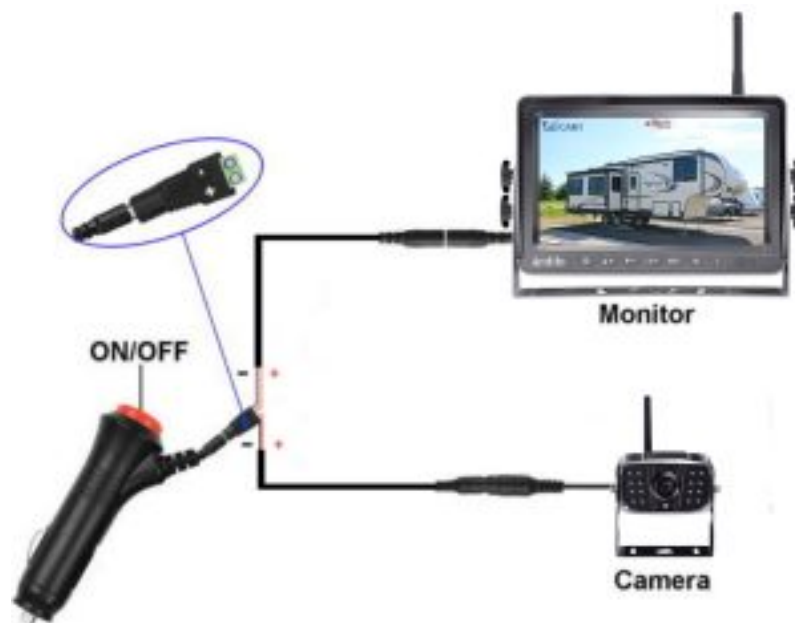

Tips: Test to make sure that your surroundings appear/display on the monitor screen! Once you have confirmed the monitor works, you are ready to install it.

If there is no image after you have installed the unit, check your connections to the power source. **PLEASE NOTE:** if you reverse the positive wire and negative wire, it will damage the camera so be cautious. If you cannot verify which wire is positive, connect the white wire to "ground" it (attach it to a metal part on vehicle) and then test the positive wire. Grounding it will protect the camera. Generally, the black wire of the tail lights to positive, the green wire of the tail light to negative.

Note: Don't cut off the DC connector on the camera, it may damage the camera.

Connection

1. The monitor can be powered by a cigarette lighter.

Connect the positive of the cigarette lighter to the red wire and the ground or negative to the black wire. Before installing, make sure you connect the power cable and antenna to the camera

Step 1 – Step 3

Step 1: Choose the camera location.

Step 2: Drill a 12mm Diameter cable hole and secure the camera with two screws.(Package contents include screws)

Step 3: Locate the reversing lights or running lights wiring on your vehicle.

Connect the red wire to the positive and the white wire to the ground or negative.



2. The monitor can be powered by ACC/Fuse/Radio etc.

Red wire is connected to the positive pole, white wire to ground



Memory card installation

Remove the screws, you would see the slot of SD Card where you can insert the SD card for recording data save.



The monitor is attached to the dash with two brackets provided + 3M

tapes. (There is a layer of film on the monitor, which can be removed by green label, or not be removed that protect the monitor.)

Two mount methods




Fan-shaped Base+3M



Bracket+3M

Monitor (Touch Button)



1. Power: Turn on/off the Monitor
2. Up: Touch it to Plus
3. Down: Touch it to Minus
4. CH-: Touch to switch Channels
5. Menu: Touch this to enter the menu mode
6. OK: Touch to confirm/Select/Open and close the Recording
7. V: Touch it turn on/off guide lines

Note: when entering the “Menu” mode, the Up and down key only plus and minus the data in the menu.

Product function introduction

PAIRING First icon

(The system does not need to pair signals when you have received, them because it has already been paired. You just need to pair it with the monitor when connecting new cameras.)

Step 1 – Step 3

Step 1: Touch the below image Red Mark button(**Menu button**) to enter menu mode (**touch it once**). In the menu, the first icon is the

Pairing. (**Before the operation, make sure you connect the power cable and antenna to the camera**



Touch + and – to switch different features

Step 2: Touch the below image Red Mark button (OK key) to confirm and enter this mode. The monitor starts pairing.



Step 3: When you see PAIRING START on screen, you need to disconnect the power for the camera and reset the power, then wait a few seconds. The image will appear.

PICTURE SETTING second icon

Step 1: Touch the below image Red Mark button (**Menu**) to enter menu mode (**touch it once**). In the menu, Use + and – button keys to switch (**Touch – button to select from right to left, Touch + button to select from left to right**). The second icon is the **Picture setting**.



Step 2: Touch the below image Red Mark button (OK) to confirm and enter this mode. In this mode, you can adjust some data for brightness/contrast/volume etc.



MIR-FLIP Third icon) Rotation Options (Vertical/Rear View/Front View)



Tips: The Screen Rotation Settings can be switched only when the screen is displayed separately full screen, which cannot be split-screen.

Split Screen Mode Fourth icon

Touch the menu button to enter the menu mode. Use + button to switch to this mode. Touch the below image Red Mark button (OK) to confirm and enter this mode.



(In this mode, you can choose one of eight split-screen modes. The last one is to Turn off the quad screen to display a single screen)


This monitor supports adding 1 to 4 cameras



Single full Screen



Split Screen

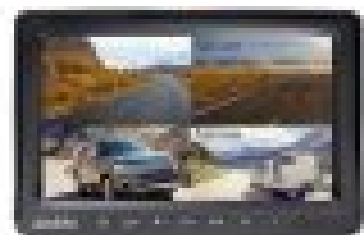

Quad Screen

For example: Select a split-screen of CAM1 and CAM2. Touch the OK button to confirm. Then touch the menu button to exit the menu interface. First came the single picture. You need to touch the CH- button to switch the

screen until the split screen appear.



(The adjustment steps of the other seven split screens are the same as this mode)

(Camera ON/OFF Fifth icon

This function can be used to turn off or on the selected camera in the system.



(Please confirm that all cameras are on before use)

For example Close Camera 1. First select the CAM1 icon (the CAM1 icon turns yellow). Touch the OK button to enter this CAM1 for adjustment (the icon color is red now). Then use the + button to switch to OFF (At this time, even if camera 1 is connected, the image will not be displayed in the CAM1 screen)



(The adjustment steps of the other camera are the same as this CAM1)

Notice: the last row of icons indicates the function is an automatic jump setting between 4 camera screens and jump time setting. When the last icon is on, it will automatically jump from the CAM1 screen to the CAM4 in a single screen.

SYSTEM Six icon

In this mode, you can adjust some data for time/language/NTSC and PAL switching/Reversing auxiliary line, etc. The reversing guidelines will only appear on a single screen, at the same time its reversing guideline can be turned off or on.



Touch the OK key to enter the system mode, then you can adjust some data for time/language/NTSC and PAL and turn on/off the Guide lines. You touch the Up and Down key to select one function. Then touch the SEL button to enter the selected function for adjustment.

Also, the guide lines could be on/off by up and down key. After touch the Menu key to quit the mode, the changes would be saved.



Turn off guide lines



Turn on guide lines

Start or Stop the Recording

In this mode, you can view the previously saved video. But Touch and hold the OK button to start recording under signal screen or split-screen normal conditions. Touch the SEL button again to stop recording. **(At this time, the REC mark will appear in the middle of the screen directly above)**



RECORD

In this mode, you can turn off or on for loop video recording/Formatting Data.



IP69K Waterproof Durable Rear Camera



Two years quality warranty and lifetime tech support. Please contact us if you meet any issues.



Troubleshoot :

1. If there is no image after installing the system, please check whether the monitor is powered on first. If the monitor button lights up, it means that has power. Then please reference the below video that checks the camera's LED light is turned on. If not light on, It may be the camera was burned out or not power.
https://youtu.be/TBVcxXpY_7M
2. Please check the Positive and Negative poles of the power supply before installation. If the Positive and Negative poles are connected in opposite directions, the camera will be damaged.
3. Sometimes due to the length of the vehicle being too long or the material of the vehicle being thick, plus the driving speed is too fast, the signal becomes weak or the image is delayed. Please contact us to get the 7db antenna with a 13.5ft extension cable that improves the signal.

Customer Service email: amtifo@rearcamera.store

No matter what signals or installation problems you meet, please contact us to get a professional solution.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.


However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF exposure guidelines, This equipment should be installed and operated with a minimum distance of 20cm the radiator your body: Use only the supplied antenna.

Documents / Resources

 <p>Wireless Backup Camera and Touch Reversing System Product Manual / Installation Instructions</p> <p>Please read the manual carefully before operating the device. Read the manual carefully. Customer Service Team Email: amtifo@rearcamera.store</p>	<p>Shenzhen Longhui Electronics A9 Car Wireless Reversing Display [pdf] Instruction Manual A9, 2AZ9V-A9, 2AZ9VA9, A9 Car Wireless Reversing Display, Car Wireless Reversing Display</p>
---	---