



Shenzhen Neewer Technology WT-U Flash Trigger User Manual

[Home](#) » [Shenzhen Neewer Technology](#) » Shenzhen Neewer Technology WT-U Flash Trigger User Manual 

Contents

- [1 Shenzhen Neewer Technology WT-U Flash Trigger](#)
- [2 Product Structure](#)
- [3 Instruction](#)
- [4 2.4G Channel Instruction](#)
- [5 Specification](#)
- [6 FCC Caution](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

SHENZHEN


Shenzhen Neewer Technology WT-U Flash Trigger



Thank you for purchasing this product

Before use, please read this user manual carefully in order to ensure your safety. Keep it properly for reference in future.

Product Structure

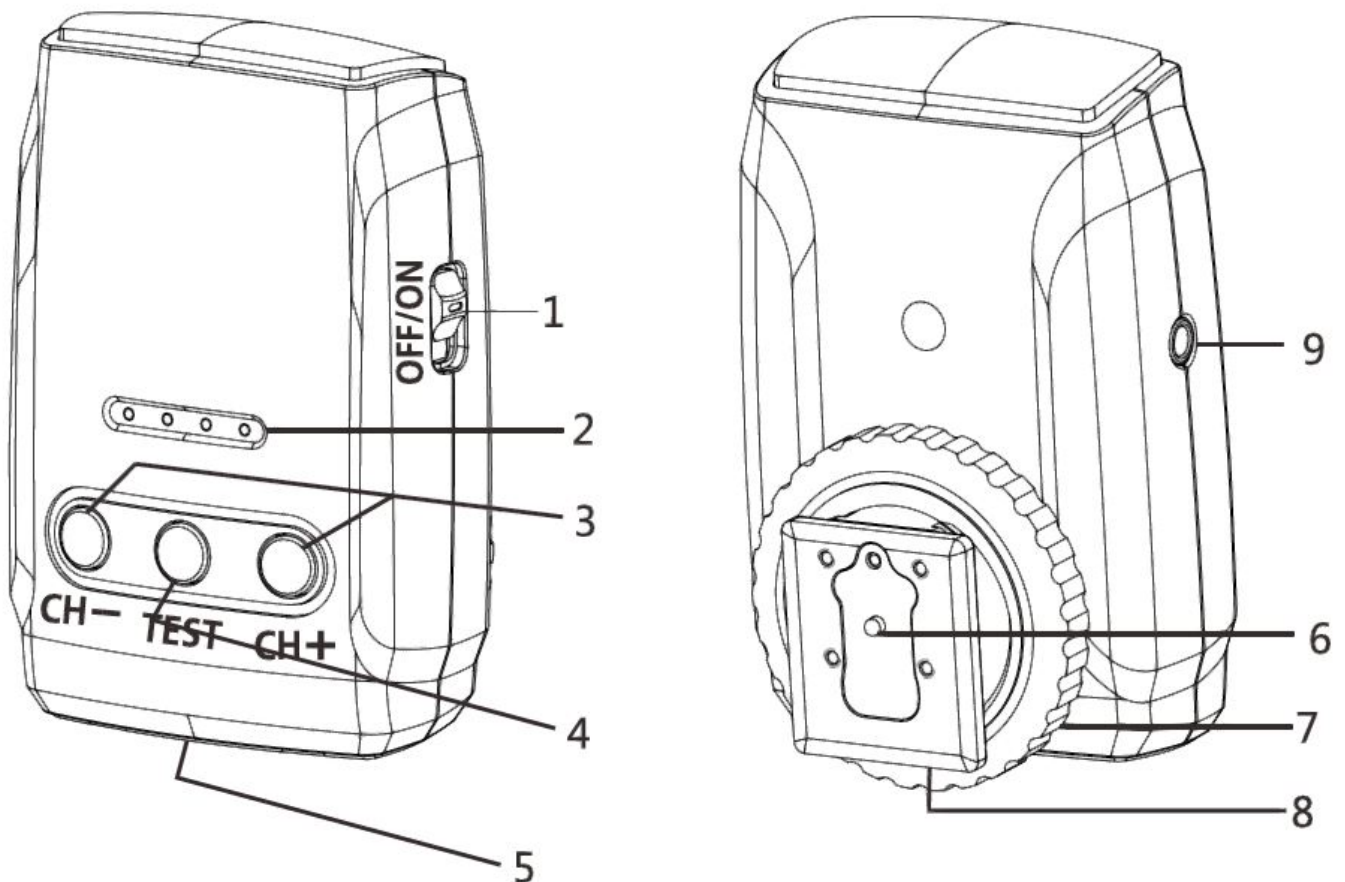

1. Power Switch
2. 2.4G Indicating Lamp
3. Channel Selection Button
4. Test Button









5. Battery Compartment
6. Hot-shoe Contact
7. Lock Ring
8. Hot-shoe
9. Sync Socket








Instruction

1. Install the battery in the trigger. Remove the battery cover, make sure the battery positive and negative polarity is correctly inserted in the battery compartment, then close the battery compartment.
2. Set the hot shoe of flash trigger WT-U on the camera's hot shoe, switch the trigger power on, press the selection button of trigger and then set same channel as the flash, press the test button on the trigger to trigger the flash.
3. If the camera does not have hot shoe, use the Sync cable to connect the trigger and camera. One side connecting the sync socket of trigger, another side connecting the PC socket of camera. Press the shutter button of camera to trigger the flash.



2.4G Channel Instruction

CH1	
CH2	
CH3	
CH4	
CH5	
CH6	
CH7	
CH8	

CH9	
CH10	
CH11	
CH12	
CH13	
CH14	
CH15	

Note: The flash will be triggered only when the flash and trigger are in same channel.

Specification

Model: WT-U

Channel: 15 channels

Net Weight: 38g

Wireless Frequency: 2.4G

Rating: 12V = (powered by 8 Button batteries)

Specifications and design are subject to change without notice.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Documents / Resources

	<p>Shenzhen Neewer Technology WT-U Flash Trigger [pdf] User Manual WT-U, WTU, 2ANIV-WT-U, 2ANIVWTU, WT-U Flash Trigger, Flash Trigger</p>
---	---

[Manuals+](#).