



AUTEL MX-SENSOR Programmable Universal TPMS Sensor Instruction Manual

[Home](#) » [AUTEL](#) » AUTEL MX-SENSOR Programmable Universal TPMS Sensor Instruction Manual 

Contents

- [1 AUTEL MX-SENSOR Programmable Universal TPMS Sensor](#)
- [2 SAFETY INSTRUCTIONS](#)
- [3 EXPLODED VIEW OF SENSOR](#)
- [4 Technical data of the sensor](#)
- [5 WARRANTY](#)
- [6 INSTALLATION GUIDE](#)
- [7 FCC Statement](#)
- [8 ISED Statement](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

AUTEL®

AUTEL MX-SENSOR Programmable Universal TPMS Sensor




SAFETY INSTRUCTIONS

Before installing the sensor, read the installation and safety instructions carefully. For reasons of safety and for optimal operation, we recommend that any maintenance and repair work be carried out by trained experts only, in accordance with the guidelines of the vehicle manufacturer. The valves are safety-relevant parts which are intended for professional installation only. Failure to do so may result in the failure of the TPMS sensor. AUTEL does not assume any liability in case of faulty or incorrect installation of the product.

CAUTION

- The TPMS sensor assemblies are replacement or maintenance parts for vehicles with factory-installed TPMS.
- Make sure to program the sensors by AUTEL sensor programming tools by the specific vehicle make, model and year before installation.
- Do not install programmed TPMS sensors in damaged wheels. In order to guarantee optimal function, the sensors may only be installed with original values and accessories provided by AUTEL.
- Upon completing the installation, test the vehicle's TPMS following the procedures described in the original manufacturer's user guide to confirm proper installation.

EXPLODED VIEW OF SENSOR

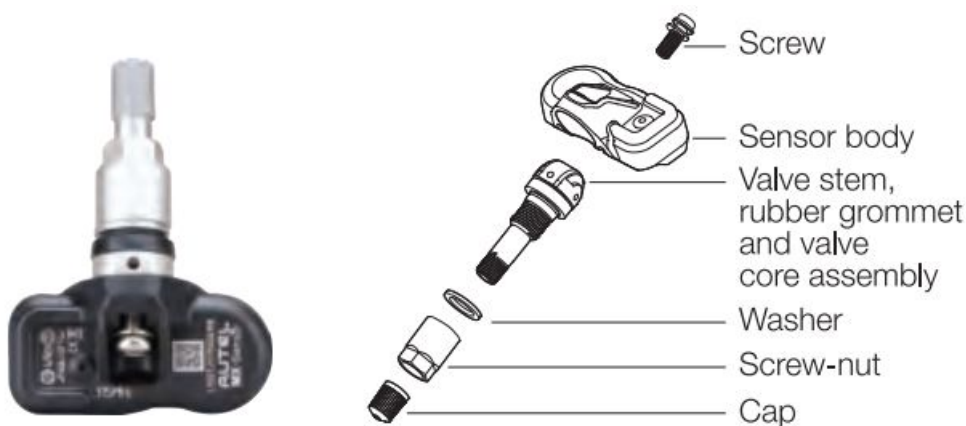

Technical data of the sensor

- **Weight of sensor without valve**
18.5 g
- **Dimensions**
approx. 55.1*29.4*21 .8 mm
- **Max. pressure range**
800 kPa

CAUTION: Each time a tire is serviced or dismounted, or if the sensor is removed or replaced, it is mandatory to replace the rubber grommet, washer, nut and valve core with our parts to ensure proper sealing. It is mandatory to replace the sensor if it is externally damaged. Correct sensor nut torque: 4 Newton-meters

WARRANTY

AUTEL guarantees that the sensor is free from material and manufacturing defects for a period of twenty-four (24)

months or for 24,000 miles, whichever comes first. AUTEL will at its discretion replace any merchandise during the warranty period. The warranty shall be void if any of the following occurs:

1. Improper installation of products
2. Improper usage
3. Induction of defect by other products
4. Mishandling of products
5. Incorrect application
6. Damage due to collision or tire failure
7. Damage due to racing or competition
8. Exceeding specific limits of the product


INSTALLATION GUIDE

IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully and pay extra attention to the safety warnings and precautions. Use this unit correctly and with care. Failure to do so may cause damage and/or personal injury and will void the warranty.

1. Loosening the tire

Remove the valve cap and core and deflate the tire. Use the bead loosener to unseat the tire bead.


CAUTION: The bead loosener must be facing the valve.

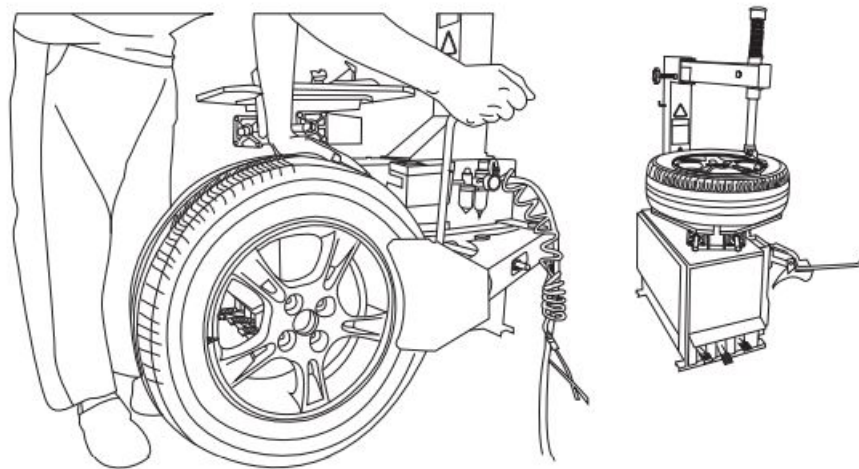


2. Dismounting the tire

Clamp the tire onto the tire changer, and adjust the valve at 1 o'clock relative to the tire separation head. Insert the tire tool and lift the tire bead onto the mounting head to dismount the bead.

CAUTION: This starting position must be observed during the whole dismounting process.

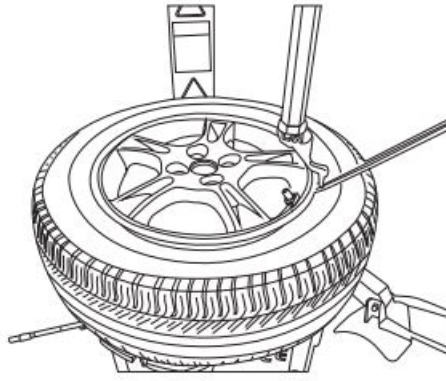

Step 3




Step 4



3. Dismounting the sensor


Remove the fastening screw and the sensor from the valve stem with a screwdriver, and then loosen the nut to remove the valve.

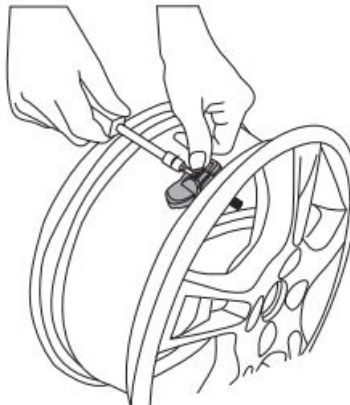

4. Mounting sensor and valve

Slide the valve stem through the valve hole of the rim. Tighten the screw-nut with 4.0 Nm with the help of the positioning pin. Assemble the sensor and the valve stem together by screw. Hold the sensor body against the rim and tighten the screw.

Step 1

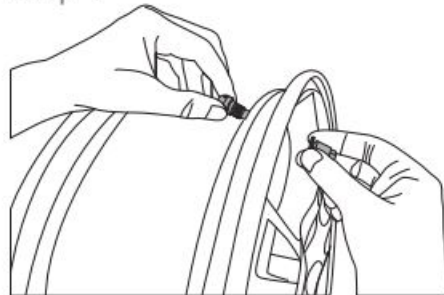


Step 2



5. Mounting the tire

Place the tire on the rim, make sure that the valve faces the separation head at an angle of 180°. Mount the tire over the rim.

CAUTION: The tire should be mounted to the wheel using tire changer manufacturer's instructions.

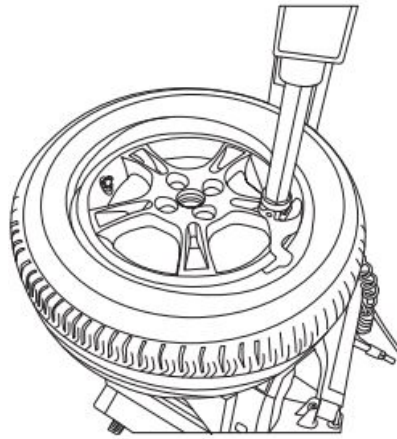

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help
- Important Note:

ISED Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device. The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

Documents / Resources

	AUTEL MX-SENSOR Programmable Universal TPMS Sensor [pdf] Instruction Manual N8PS20133, WQ8N8PS20133, MX-SENSOR, Programmable Universal TPMS Sensor
--	---