

# Shenzhen Sunveytech MY-SNR-CX77 Digital Wireless Backup Camera Systems User Manual

Home » Shenzhen Sunveytech » Shenzhen Sunveytech MY-SNR-CX77 Digital Wireless Backup Camera Systems User Manual ™


#### **Contents**

- 1 Shenzhen Sunveytech MY-SNR-CX77 Digital Wireless Backup Camera Systems
- 2 What's in the Box?
- 3 Introduction
- **4 Monitor Operation**
- 5 Sector bracket installation method
- **6 Installation Diagram**
- 7 Connection method
- 8 Pairing the Camera and Monitor
- 9 Specifications
- 10 Troubleshooting
- 11 FCC Warning Statement
- 12 Documents / Resources
- **13 Related Posts**



Shenzhen Sunveytech MY-SNR-CX77 Digital Wireless Backup Camera Systems

#### What's in the Box?

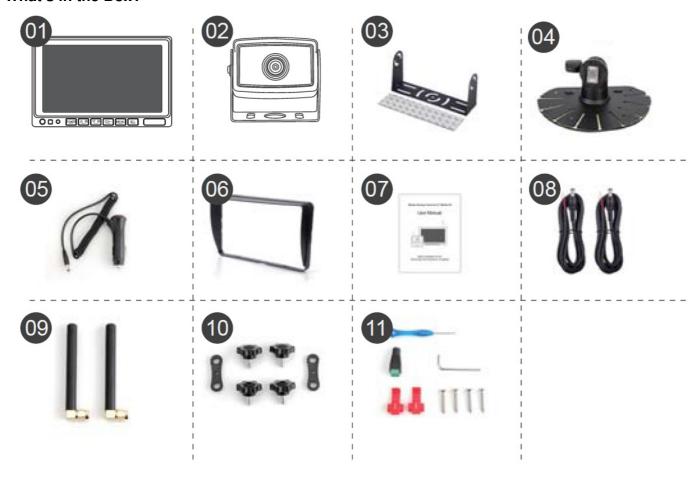

**NOTE:** The contents included may be different based on the kit you purchased. Please take the actual product as standard.

- 1. 7inch IPS Monitor
- 2. Camera
- 3. U-shaped bracket
- 4. Butterfly bracket
- 5. Car Charger
- 6. Sunshade
- 7. User Manual
- 8. Power cable
- 9. Antenna
- 10. Accessories
- 11. Installation tool

## Introduction

Please read all of the installation instructions carefully before installing the product. Improper installation will void the manufacturer's warranty.

Thank you very much for purchasing a Rear View Backup Camera System. With this manual, you will be able to properly install and operate the unit. The Backup Camera System is intended to be installed as a supplement aid to your standard rearview mirror that already exists in your vehicle. The Backup Camera System should not be used as a substitute for the standard rearview mirror or for any other mirror that exists in your vehicle. In some jurisdictions, it is unlawful for a person to drive a motor vehicle equipped with a TV viewer or screen located

forward of the back of the driver's seat or in any location that is visible, directly or indirectly, to the driver while operating the vehicle.

## **Monitor Operation**



Button	Function	
	Use this button to turn the monitor On and Off	
	1) Brightness "-" 2) Enter the menu select left 3) "-"	
	1) Brightness "+" 2) Enter the menu select right 3) "+"	
	Switch channel	
	1) Menu 2) Return to the previous level	
	1) Confirm key 2) Car ruler 3) Long press "SEL" to call up V/H/W	


- On the back of the monitor, you can insert a TF card Open the SD card slot on the monitor back with a screwdriver, insert the SD card
- It is recommended to use a high-speed TF card of class 10 or above. (Less than 128G)
- Plugin the card to start recording("SEL" to turn on/off recording)
- Recording: REC



## Sector bracket installation method




# **Installation Diagram**

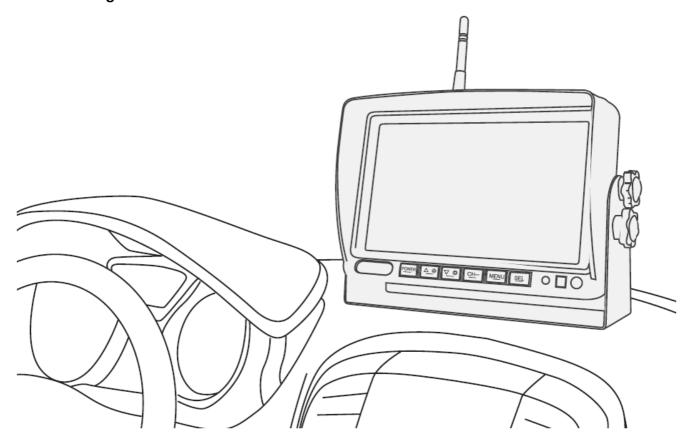


## **Monitor Installation**


Choose a monitor location in your vehicle that does not block your view and complies with local laws for safe driving. Do not place in an area where it might interfere with driving.

- Camera Installation
- Suitable Installation Position

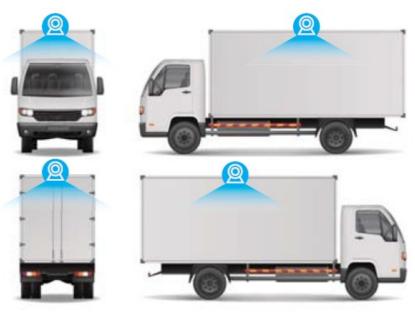

## **Connection method**

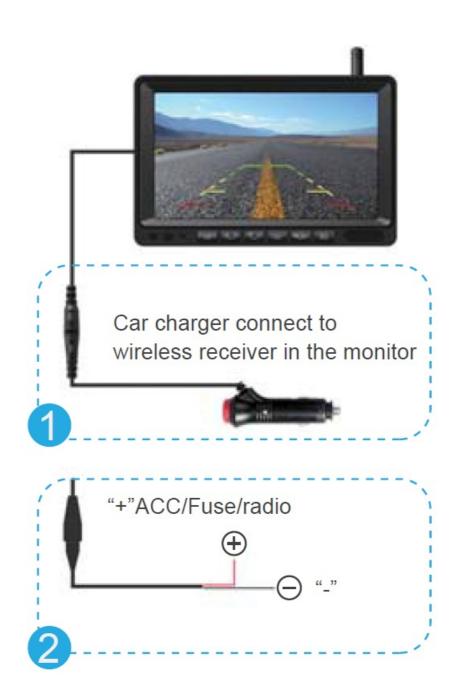


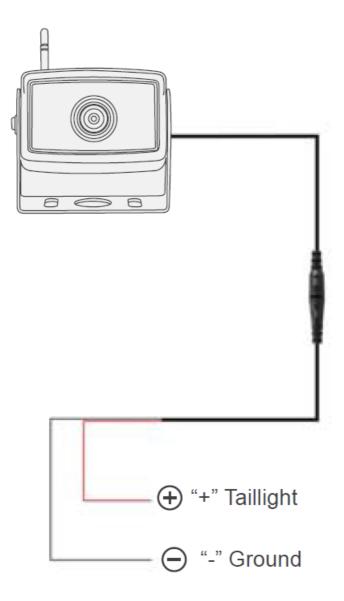


**Note:** Of connecting power directly to a battery, the cameras are always ON and therefore drain the battery. Therefore it is recommended to connect power to an ignition switched accessory power source.

# **Pairing the Camera and Monitor**

1. Select the channel to be pairing

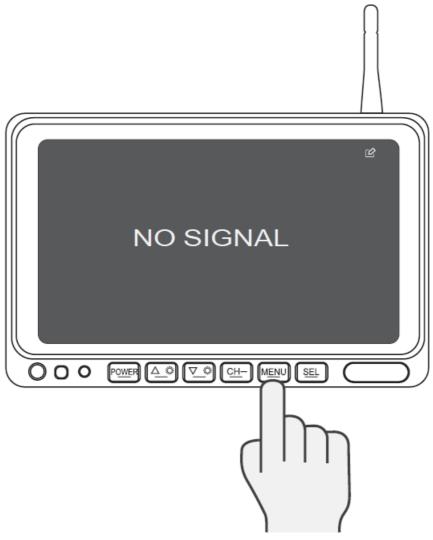

2. Enter the menu and select pairing

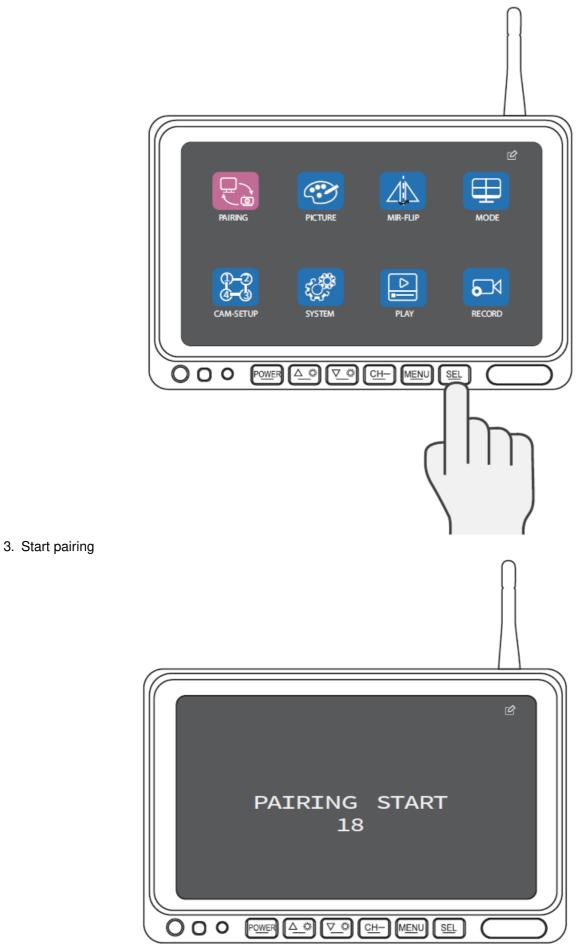

4. Waiting for matching and drawing successfully



**NOTE:** when you need pairing, please confirm the circuit is properly connected and powered. If you need to pair multiple cameras, please switch to the corresponding channel.

# **Specifications**

Power Supply	DC12 to 36V
Wireless Frequency	2.4 GHz
2.4G Wireless network range	2406-2478MHz
Wireless Range	300m(open area)
Delaying Time	<200ms
Operating temperature	-20°C ~ 80°C

## **CAMERA**

Image Sensor	1/3 inch
Waterproof Rating	IP68K
View Angle	127°[H] 170°[D]
Camera Pixel	1000TVL

## **MONITOR**

LCD Size	7 inch IPS
Resolution	1024(H) x 600(V)
Contrast	500:1
Brightness	500cd/2
Response Time	25ms
Power Consumption	<500mA

#### **Troubleshooting**

Problem	Solution
	Check the cigarette lighter has 12-36V DC Output
Monitor Won't turn on	Check the fuse in the Cigarette socket adapter
Camera and Monitor won't pai	Check if the camera is receiving power
r	Make sure to follow the instructions to operate the Pairing
	Check if the camera and monitor antennas are installed
	Distance between camera and monitor is too great. Reduce distance between camera and monitor
	Large dense objects could be obscuring the signal. If possible, move the object s
	Interference from overheard power lines may be affecting the signal
Weak Signal	Try unpairing and pairing
Night Vision is poor	The night sensor on the camera may be dirty or obstructed
Trigiti vision is poor	Ensure the camera is installed at least 2 inches away from the rear lights
Dark Picture	Check whether brightness and contrast are adjusted correctly

#### **FCC Warning Statement**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one

or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC Rules.

## Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

#### **Documents / Resources**



<u>Shenzhen Sunveytech MY-SNR-CX77 Digital Wireless Backup Camera Systems</u> [pdf] User Manual

MY-CX77615, MYCX77615, 2AQNR-MY-CX77615, 2AQNRMYCX77615, MY-SNR-CX77 Digita I Wireless Backup Camera Systems, MY-SNR-CX77, Digital Wireless Backup Camera Systems

Manuals+,